



SLOVENSKI STANDARD
SIST ISO 10762:1998
01-december-1998

Fluidna tehnika - Hidravlika - Vgradne mere valjev - Vrsta 10 MPa (100 barov)

Hydraulic fluid power -- Cylinder mounting dimensions -- 10 MPa (100 bar) series

Transmissions hydrauliques -- Dimensions d'interchangeabilité des vérins -- Série 10 MPa (100 bar)

(standards.iteh.ai)

Ta slovenski standard je istoveten z: ISO 10762:1997

<https://standards.iteh.ai/catalog/standards/sist/9aff951c-89c7-4b27-b9bf-10cf5b03296e/sist-iso-10762-1998>

ICS:

23.100.20 Pilačja } čepa Cylinders

SIST ISO 10762:1998

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 10762:1998

<https://standards.iteh.ai/catalog/standards/sist/9aff951c-89c7-4b27-b9bf-10cf5b03296e/sist-iso-10762-1998>

INTERNATIONAL
STANDARD

ISO
10762

First edition
1997-12-01

**Hydraulic fluid power — Cylinder mounting
dimensions — 10 MPa (100 bar) series**

*Transmissions hydrauliques — Dimensions d'interchangeabilité des
vérins — Série 10 MPa (100 bar)*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 10762:1998

<https://standards.iteh.ai/catalog/standards/sist/9aff951c-89c7-4b27-b9bf-10cf5b03296e/sist-iso-10762-1998>



Reference number
ISO 10762:1997(E)

ISO 10762:1997(E)**Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

iTeh STANDARD PREVIEW

International Standard ISO 10762 was prepared by Technical Committee ISO/TC 131, *Fluid power systems*, Subcommittee SC 3, *Cylinders*.

Annex A of this International Standard is for information only.

<https://standards.iteh.ai/catalog/standards/sist/9aff951c-89c7-4b27-b9bf-10cf5b03296e/sist-iso-10762-1998>

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet central@iso.ch
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

Introduction

In hydraulic fluid power systems, power is transmitted and controlled through a liquid under pressure within an enclosed circuit.

One component of such systems is the fluid power cylinder. This is a device which converts power into linear mechanical force and motion. It consists of a movable element, i.e. a piston and piston rod, operating within a cylindrical bore.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ISO 10762:1998](https://standards.iteh.ai/catalog/standards/sist/9aff951c-89c7-4b27-b9bf-10cf5b03296e/sist-iso-10762-1998)

<https://standards.iteh.ai/catalog/standards/sist/9aff951c-89c7-4b27-b9bf-10cf5b03296e/sist-iso-10762-1998>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 10762:1998

<https://standards.iteh.ai/catalog/standards/sist/9aff951c-89c7-4b27-b9bf-10cf5b03296e/sist-iso-10762-1998>

Hydraulic fluid power — Cylinder mounting dimensions — 10 MPa (100 bar) series

1 Scope

This International Standard establishes mounting dimensions for cylinders for use at 10 MPa [100 bar¹⁾], as required for interchangeability of these cylinders.

NOTE — This International Standard allows manufacturers of hydraulic equipment flexibility in the design of 10 MPa (100 bar) cylinders and does not restrict technical development; however, it does provide basic guidelines.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 273:1979, *Fasteners — Clearance holes for bolts and screws.*

ISO 286-2:1988, *ISO system of limits and fits — Part 2: Tables of standard tolerance grades and limit deviations for holes and shafts.*

ISO 1179-1:—²⁾, *Connections for general use and fluid power — Ports and stud ends with ISO 228-1 threads with elastomeric or metal-to-metal sealing — Part 1: Threaded ports.*

ISO 3320:1987, *Fluid power systems and components — Cylinder bores and piston rod diameters — Metric series.*

ISO 4395:1978, *Fluid power systems and components — Cylinders — Piston rod thread dimensions and types.*

ISO 5598:1985, *Fluid power systems and components — Vocabulary.*

ISO 6149-1:1993, *Connections for fluid power and general use — Ports and stud ends with ISO 261 threads and O-ring sealing — Part 1: Ports with O-ring seal in truncated housing.*

ISO 8133:1991, *Hydraulic fluid power — Single rod cylinders, 16 MPa (160 bar) compact series — Accessory mounting dimensions.*

1) 1 bar = 0,1 MPa = 10⁵ Pa; 1 MPa = 1 N/mm²

2) To be published. (Revision, in part, of ISO 1179:1981)

3 Definitions

For the purposes of this International Standard, the definitions given in ISO 5598 and the following definitions apply.

3.1 cylinder: Device which converts fluid power into linear mechanical force and motion.

3.2 cylinder bore: Internal diameter of the cylinder body.

3.3 piston rod: Element which transmits mechanical force and motion from the piston.

3.4 mounting: Device by which a cylinder is fastened to its mating element.

4 Dimensions

Mounting dimensions for cylinders manufactured in accordance with this International Standard shall be as given in figures 1 to 13 and tables 1 to 13. Most tolerances are in accordance with ISO 286-2.

5 Bore sizes

The following bore sizes in accordance with ISO 3320, in millimetres, are included in this series:

40 — 50 — 63 — 80 — 100 — 125 — 160 — 200

iTeh STANDARD PREVIEW
(standards.iteh.ai)

6 Mounting types

SIST ISO 10762:1998

[https://standards.iteh.ai/catalog/standards/sist/9aff951c-89c7-4b27-b9bf-](https://standards.iteh.ai/catalog/standards/sist/9aff951c-89c7-4b27-b9bf-10cf5b03296e/sist-iso-10762-1998)

[10cf5b03296e/sist-iso-10762-1998](https://standards.iteh.ai/catalog/standards/sist/9aff951c-89c7-4b27-b9bf-10cf5b03296e/sist-iso-10762-1998)

This International Standard includes the following mounting types which conform to ISO 6099:

ME5 — Rectangular flange, integral with head (see figure 3 and table 3)

ME6 — Cap, rectangular flange (see figure 4 and table 4)

MP1 — Cap, fixed clevis (see figure 5 and table 5)

MP3 — Cap, fixed eye (see figure 6 and table 6)

MP5 — Cap, fixed eye with spherical plain bearing (see figure 7 and table 7)

MS2 — Side lugs (see figure 8 and table 8)

MT1 — Head, integral trunnion (male) (see figure 9 and table 9)

MT4 — Intermediate, fixed or movable trunnion (male) (see figure 10 and table 10)

MX1 — Both ends, studs or tie rods extended (see figure 11 and table 11)

MX2 — Cap, studs or tie rods extended (see figure 12 and table 12)

MX3 — Head, studs or tie rods extended (see figure 13 and table 13)

7 Piston rod characteristics

7.1 This International Standard covers piston rods which have a shouldered male thread end (see figure 1 and table 1 for basic dimensions).

7.2 For internally threaded rod ends, see ISO 4395.

7.3 If other piston rod diameters or other piston rod threads are required, those specified in ISO 3320 and ISO 4395 shall be used.

8 Identification statement (Reference to this International Standard)

Use the following statement in test reports, catalogues and sales literature when electing to comply with this International Standard:

"Interchangeable mounting dimensions for 10 MPa (100 bar) cylinders are selected in accordance with ISO 10762:1997, *Hydraulic fluid power — Cylinder mounting dimensions — 10 MPa (100 bar) series.*"

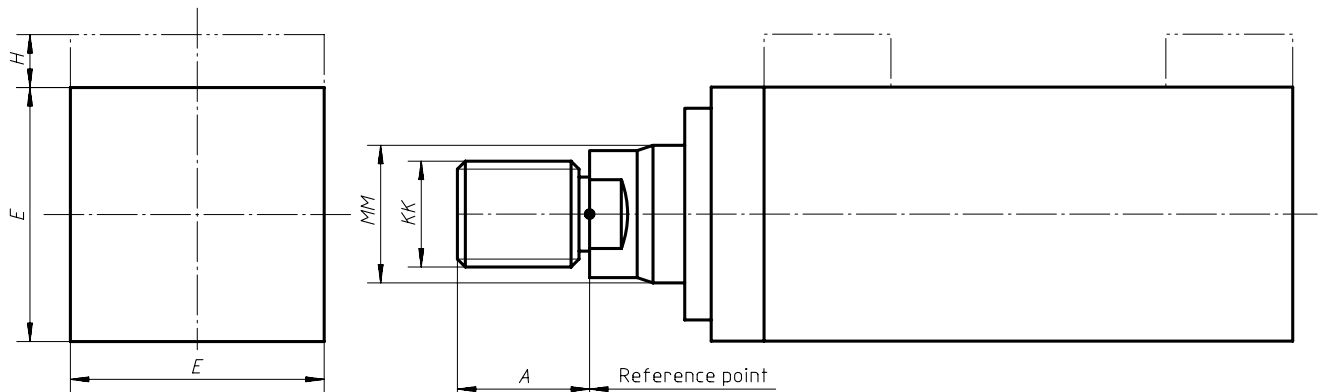


Figure 1 — Basic dimensions
(standards.iteh.ai)

Table 1 — Basic dimensions

SIST ISO 10762:1998

<https://standards.iteh.ai/catalog/standards/sist/9aff951c-89c7-4b27-b9bf-10cf5b0296e/sist-iso-10762-1998>

Dimensions in millimetres

Bore	MM ¹⁾	KK	A ²⁾ max.	E max.	H ²⁾ max.
40	18 or 28	M14 × 1,5	18	52	5
	28	M20 × 1,5	28		
50	22 or 36	M16 × 1,5	22	65	5
	36	M27 × 2	36		
63	28 or 45	M20 × 1,5	28	77	3
	45	M33 × 2	45		
80	36 or 56	M27 × 2	36	96	4
	56	M42 × 2	56		
100	45 or 70	M33 × 2	45	115	5
	70	M48 × 2	63		
125	56 or 90	M42 × 2	56	140	—
	90	M64 × 3	85		
160	70 or 110	M48 × 2	63	180	—
	110	M80 × 3	95		
200	90 or 140	M64 × 3	85	225	—
	140	M100 × 3	112		

NOTE — For accessories, see ISO 8133. Port dimensions and positions are given in figure 2 and table 2.

1) See 7.3.

2) Extra height is provided for the reinforced rod head on all four bore sizes 50 mm, 63 mm, 80 mm and 100 mm, and is also provided for the head and cap on both rod sizes for the 40 mm bore.

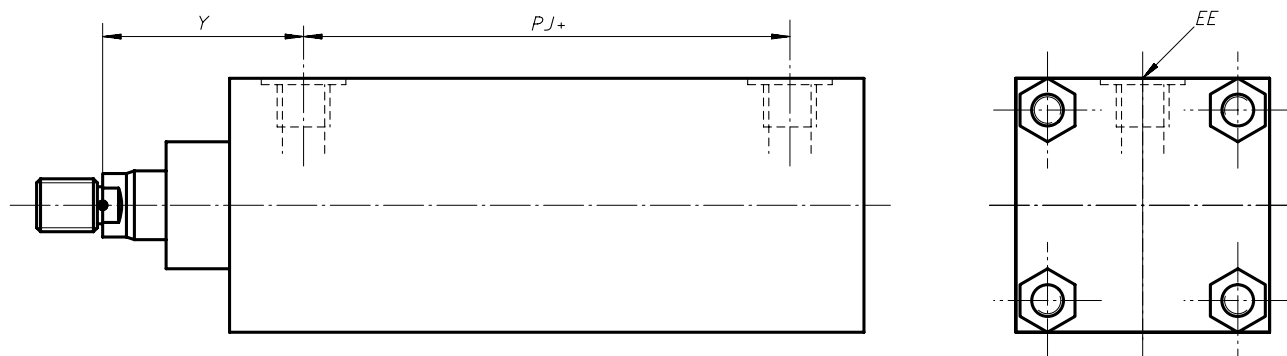


Figure 2 — Port dimensions and positions

iTeh STANDARD PREVIEW

Table 2 — Port dimensions and positions

SIST ISO 10762:1998

Dimensions in millimetres

Bore	Port thread		Y	PJ ³⁾
	inch ¹⁾	metric ²⁾		
			± 2	± 1,25
40	G 3/8	M18 × 1,5	58	58
50	G 3/8	M18 × 1,5	65	58
63	G 1/2	M22 × 1,5	69	66
80	G 1/2	M22 × 1,5	77	74
100	G 3/4	M27 × 2	79	86
125	G 3/4	M27 × 2	80	93
160	G 1	M33 × 2	85	100
200	G1	M33 × 2	85	120

1) Ports in accordance with ISO 1179-1.

2) Threaded ports in accordance with ISO 6149-1 are preferred for new designs.

3) Stroke length ≤ 1 250 mm.

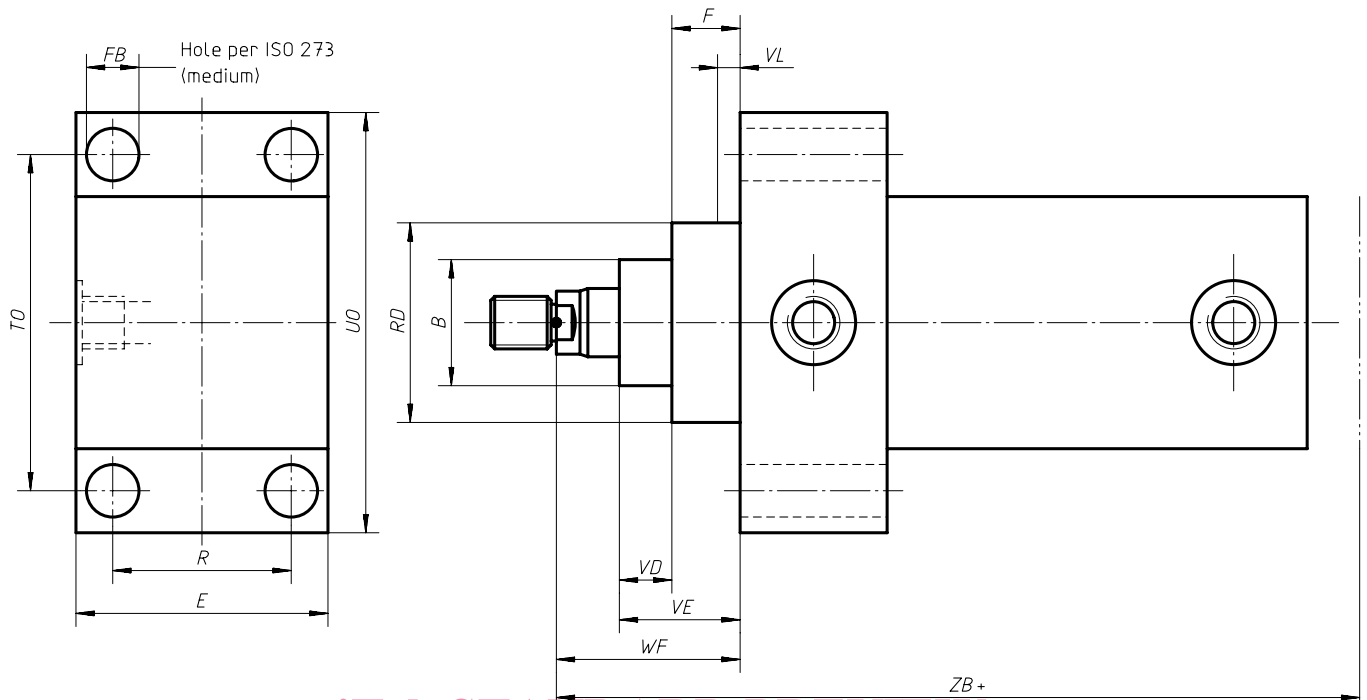


Figure 3 — ME5 — Rectangular flange, integral with head
(standards.iteh.ai)

Table 3 — Dimensions of rectangular flange, integral with head

<https://standards.iteh.ai/catalog/standards/sist/9aff951c-89c7-4b27-b9bf-10e5b03296e/sist-iso-10762-1998>

Dimensions in millimetres

Bore	MM	RD f8	TO js13	FB H13	R js13	WF ± 2	F max.	E max.	UO max.	ZB max.	VE max.	B max.	VL min.
40	18	51	70	6,6	40	35	10	52	86	141	22	30	3
	28											42	
50	22	62	86	9	50	41	10	65	105	149	25	34	4
	36											50	
63	28	72	98	9	56	48	10	77	118	163	29	42	4
	45											60	
80	36	92	119	11	70	51	16	96	143	180	29	50	4
	56											72	
100	45	110	138	13,5	90	57	16	115	162	204	32	60	5
	70											88	
125	56	130	168	17,5	110	57	16	140	194	209	32	72	5
	90											108	
160	70	125	212	22	140	57	25	180	248	228	32	88	5
	110	170										133	
200	90	150	268	26	170	57	25	225	308	253	32	108	5
	140	210										163	