

TECHNICAL REPORT



Communication networks and systems for power utility automation –
Part 90-2: Using IEC 61850 for communication between substations and control
centres

[IEC TR 61850-90-2:2016](https://standards.iteh.ai/catalog/standards/sist/f01499ff-84a3-41bc-8321-09d0534d1f7e/iec-tr-61850-90-2-2016)

<https://standards.iteh.ai/catalog/standards/sist/f01499ff-84a3-41bc-8321-09d0534d1f7e/iec-tr-61850-90-2-2016>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2016 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

INTERNATIONAL STANDARDS PREVIEW
(standards.iteh.ai)
IEC TR 61850-90-2:2016
<https://standards.iteh.ai/catalog/standards/iec/61850-90-2-2016>
09d0534d1f7e/iec-tr-61850-90-2-2016

TECHNICAL REPORT



**Communication networks and systems for power utility automation –
Part 90-2: Using IEC 61850 for communication between substations and control
centres**

[IEC TR 61850-90-2:2016](https://standards.iteh.ai/catalog/standards/sist/f01499ff-84a3-41bc-8321-09d0534d1f7e/iec-tr-61850-90-2-2016)

<https://standards.iteh.ai/catalog/standards/sist/f01499ff-84a3-41bc-8321-09d0534d1f7e/iec-tr-61850-90-2-2016>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.200

ISBN 978-2-8322-3187-6

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	7
INTRODUCTION.....	9
1 Scope.....	10
2 Normative references.....	11
3 Terms and definitions	13
4 Abbreviated terms	14
5 Use cases and requirements.....	15
5.1 Use cases.....	15
5.1.1 Overview	15
5.1.2 Actors.....	15
5.1.3 Use case diagram.....	16
5.1.4 Use cases.....	17
5.2 Telecontrol.....	17
5.2.1 General	17
5.2.2 Constraints / assumptions / design considerations	18
5.2.3 Actors.....	18
5.2.4 Use cases diagram.....	19
5.2.5 Use case description.....	20
5.2.6 Sequence diagrams.....	20
5.3 Synchrophasor.....	26
5.3.1 General	26
5.3.2 Constraints / assumptions / design considerations	26
5.3.3 Use cases.....	26
5.4 Disturbance	26
5.4.1 General	26
5.4.2 Constraints / assumptions / design considerations	26
5.4.3 Actors.....	26
5.4.4 Use case diagram.....	27
5.4.5 Uses cases description	28
5.4.6 Sequence diagrams	28
5.5 Counting	29
5.5.1 General	29
5.5.2 Constraints / assumptions / design considerations	29
5.5.3 Actors.....	30
5.5.4 Use cases diagram	30
5.5.5 Use cases description	30
5.5.6 Sequence diagrams	31
5.6 Power quality	31
5.6.1 General	31
5.6.2 Constraints / assumptions / design considerations	31
5.6.3 Actors.....	32
5.6.4 Use cases diagram	32
5.6.5 Use cases description	32
5.6.6 Sequence diagrams	32
5.7 Asset.....	33
5.7.1 General	33

5.7.2	Constraints / assumptions / design considerations	34
5.7.3	Actors	34
5.7.4	Use cases diagram	34
5.7.5	Use cases description	34
5.7.6	Sequence diagram	34
5.8	Parameter configuration	35
5.8.1	General	35
5.8.2	Constraints / assumptions / design considerations	35
5.8.3	Actors	35
5.8.4	Use cases diagram	36
5.8.5	Use cases description	36
5.8.6	Sequence diagrams	36
5.9	Communication requirements for SS to CC communication	37
5.9.1	General issues	37
5.9.2	Functions based on substation- to-control-centre communication	39
5.9.3	Message performance requirements	39
5.9.4	Introduction and use of message performance classes	40
5.9.5	Requirements for data and communication quality	41
5.9.6	Reliability	41
5.9.7	Availability	41
5.9.8	Requirements concerning the communication system	42
5.10	Modelling requirements for SS to CC communication	42
6	Configuration aspects	43
6.1	Requirements	43
6.2	Extension of the engineering process with SCL	44
6.2.1	General	44
6.2.2	Engineering workflow	44
6.2.3	Integrated engineering workflow – LANs with WAN	46
6.3	Extension of the SCL schema from IEC 61850-6:2009	47
6.3.1	General	47
6.3.2	Modelling of redundancy	47
6.3.3	Modelling of data references between SCL files	55
6.3.4	Functional naming	58
6.3.5	Examples	58
6.4	Security aspects	58
7	Basic Communication Structure – Principles and models	59
7.1	Communication and Modelling aspects	59
7.1.1	General	59
7.1.2	Communication aspects	59
7.1.3	Proxy/Gateway model	78
7.1.4	Service tracking	96
7.2	Modelling and control block classes	96
7.2.1	General	96
7.2.2	CONTROL class model for Proxy/Gateway	96
7.2.3	SETTING-GROUP-CONTROL-BLOCK class model for Proxy/Gateway	112
7.2.4	REPORT-CONTROL-BLOCK class model for Proxy/Gateway	113
7.2.5	LOG-CONTROL-BLOCK class model for Proxy/Gateway	113
7.2.6	File transfer	113
7.2.7	Applying cyber security to the Proxy/Gateway	114

8	SCSM aspects – MMS and ISO/IEC 8802-3.....	115
8.1	General.....	115
8.2	TCP/IP T-Profiles	115
8.3	OSI T-Profile	116
9	SCSM aspects – Sampled values over ISO/IEC 8802-3 (IEC 61850-9-2).....	116
	Annex A (informative) Protocol Implementation Conformance Statement.....	117
A.1	General.....	117
A.2	ACSI basic conformance statement	117
A.3	ACSI models conformance statement	118
A.4	ACSI service conformance statement	119
A.5	Redundancy support statement	122
A.6	Transformation function support statement	122
A.7	Proxy/Gateway model support statement	123
A.8	Instruction and comments on using this template	124
A.8.1	Comments	124
A.8.2	Instructions.....	124
A.8.3	Revision history	124
	Annex B (informative) SCL syntax: XML schema definition.....	125
	Annex C (informative) Substation SCD example	129
	Annex D (informative) Control Centre SCD example	155
	Bibliography	188
	Figure 1 – Connectivity and communication paths of a substation	11
	Figure 2 – Use case diagram for substation to control centre communication	16
	Figure 3 – Telecontrol use case diagram	19
	Figure 4 – Principle of data forwarding, depending on the operation mode	25
	Figure 5 – Disturbance use cases diagram	27
	Figure 6 – Counting use cases diagram.....	30
	Figure 7 – Power quality use cases diagram.....	32
	Figure 8 – Asset management touches a broad range of core electric utility processes.....	33
	Figure 9 – Asset supervision use cases diagram.....	34
	Figure 10 – Parameter configuration use cases diagram.....	36
	Figure 11 – Levels and logical interfaces in substation automation systems	38
	Figure 12 – Definition of transfer time t.....	39
	Figure 13 – Scope of separated engineering workflow	44
	Figure 14 – Engineering workflow.....	46
	Figure 15 – Scope of integrated workflow	47
	Figure 16 – Diagram of eTr-IEC61850-90-2:RedundancyModes	48
	Figure 17 – Diagram of eTr-IEC61850-90-2:LinkModes.....	49
	Figure 18 – Diagram of eTr-IEC61850-90-2:ClientRedundancyServices	50
	Figure 19 – Diagram of eTr-IEC61850-90-2:LDeviceOverride.....	51
	Figure 20 – Diagram of eTr-IEC61850-90-2:RedundantServerTo.....	52
	Figure 21 – Diagram of eTr-IEC61850-90-2:RedundantClientTo.....	54
	Figure 22 – Diagram of eTr-IEC61850-90-2:StandbyLinkMode	55
	Figure 23 – Diagram of eTr-IEC61850-90-2:ExternalSCL	56

Figure 24 – Diagram of eTr-IEC61850-90-2:ProxyOf.....	57
Figure 25 – Communication concept.....	60
Figure 26 – SS to CC communication via direct access.....	65
Figure 27 – Basic configuration for indirect access	66
Figure 28 – Configuration without redundancy	70
Figure 29 – AccessPoint redundancy.....	71
Figure 30 – Device redundancy of frontend computers.....	72
Figure 31 – Device redundancy of Proxy/Gateway and frontend computers	73
Figure 32 – Multiple redundancies.....	74
Figure 33 – Usage of buffers and duplicate filter	77
Figure 34 – Product related naming Proxy/Gateway.....	80
Figure 35 – Modelling a Proxy/Gateway IED – Preserving the logical devices.....	82
Figure 36 – Modelling a Proxy/Gateway IED – Renaming of logical devices	83
Figure 37 – Modelling a Proxy/Gateway IED – Rearranging logical nodes	84
Figure 38 – Modelling a Proxy/Gateway IED – Merging of logical nodes	85
Figure 39 – Modelling a Proxy/Gateway IED – Splitting of logical nodes	86
Figure 40 – Modelling a Proxy/Gateway IED – Transform to semantically defined LN	87
Figure 41 – Modelling a Proxy/Gateway IED – Convert semantically defined LNs	88
Figure 42 – Modelling a Proxy/Gateway IED – Create an array subset	89
Figure 43 – Comparison of indirect, indirect transparent and direct access.....	92
Figure 44 – Principle of the Proxy/Gateway control model.....	96
Figure 45 – State machine of direct control with normal security	101
Figure 46 – Direct control with normal security – positive case.....	102
Figure 47 – Direct control with normal security – negative case	103
Figure 48 – State machine of SBO control with normal security.....	104
Figure 49 – SBO control with normal security – positive case.....	105
Figure 50 – SBO control with normal security – negative case	106
Figure 51 – State machine of direct control with enhanced security.....	107
Figure 52 – Direct control with enhanced security – positive case	108
Figure 53 – Direct control with enhanced security – negative case	109
Figure 54 – State machine of SBO control with enhanced security	110
Figure 55 – SBO control with enhanced security – positive case	111
Figure 56 – SBO control with enhanced security – negative case	112
Figure 57 – Integrity protection for the Clear Token	114
Figure 58 – Integrity protection for the Clear Token and the MMS message.....	114
Figure 59 – Integrity protection and encryption for the MMS message	115
Figure 60 – MMS Objects and services used	115
Table 1 – Constraints for acquisition of status	21
Table 2 – Constraints for acquisition of alarms	22
Table 3 – Constraints for remote control.....	22
Table 4 – Forwarding of information depending on the operation mode	25
Table 5 – Typical Transfer time requirements for control and monitoring data.....	41

Table 6 – Attributes of the eTr-IEC61850-90-2:RedundancyModes element.....	48
Table 7 – Attributes of the eTr-IEC61850-90-2:LinkModes element	49
Table 8 – Elements of the eTr-IEC61850-90-2:ClientRedundancyServices element	50
Table 9 – Attributes of the eTr-IEC61850-90-2:RedundantServerTo element	53
Table 10 – Attributes of the eTr-IEC61850-90-2:RedundantClientTo element	54
Table 11 – Values of the eTr-IEC61850-90-2:tLinkModeEnum.....	55
Table 12 – Attributes of the eTr-IEC61850-90-2:ExternalSCL element.....	56
Table 13 – Attributes of the eTr-IEC61850-90-2:ProxyOf element	58
Table 14 – Use case vs. IEC 61850 – Service table	62
Table 15 – Link states	68
Table 16 – Usage of buffered / unbuffered reporting for the redundancy schemes	68
Table 17 – Requirements versus redundancy scheme.....	69
Table 18 – Extension of the common LN class.....	78
Table 19 – Negative responses to service requests	98
Table 20 – Mapping of Comtrade folder names in the Proxy/Gateway	113
Table A.1 – Basic conformance statement.....	117
Table A.2 – ACSI models conformance statement.....	118
Table A.3 – ACSI service conformance statement.....	119
Table A.4 – Redundancy mechanism support statement	122
Table A.5 – Proxy/Gateway transformation function support statement.....	123
Table A.6 – Proxy/Gateway model support statement	123

[IEC TR 61850-90-2:2016](https://standards.iteh.ai/catalog/standards/sist/f01499ff-84a3-41bc-8321-09d0534d1f7e/iec-tr-61850-90-2-2016)

<https://standards.iteh.ai/catalog/standards/sist/f01499ff-84a3-41bc-8321-09d0534d1f7e/iec-tr-61850-90-2-2016>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**COMMUNICATION NETWORKS AND
SYSTEMS FOR POWER UTILITY AUTOMATION –**
**Part 90-2: Using IEC 61850 for communication
between substations and control centres**
FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC TR 61850-90-2, which is a technical report, has been prepared by IEC technical committee 57: Power systems management and associated information exchange.

The text of this technical report is based on the following documents:

DTR	Report on voting
57/1578/DTR	57/1641/RVC

Full information on the voting for the approval of this technical report can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all the parts in the IEC 61850 series, published under the general title *Communication networks and systems for power utility automation*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

(standards.iteh.ai)

[IEC TR 61850-90-2:2016](https://standards.iteh.ai/catalog/standards/sist/f01499ff-84a3-41bc-8321-09d0534d1f7e/iec-tr-61850-90-2-2016)

<https://standards.iteh.ai/catalog/standards/sist/f01499ff-84a3-41bc-8321-09d0534d1f7e/iec-tr-61850-90-2-2016>

INTRODUCTION

Following the publication of IEC 61850, substations using IEC 61850 technologies have been implemented. The concepts of IEC 61850 are also used in applications outside of the substation such as distributed energy resources, hydro power plants and wind power plants. Therefore, IEC 61850 forms the foundation for a globally standardized utility communication network.

The object models and configuration language introduced by IEC 61850 provide new possibilities for the management of the automation system. A direct and seamless access from the control and maintenance centres to the IEDs of the substation automation system allows efficient data management of the overall control system.

The possibility of using IEC 61850 for communication between substations and control systems is mentioned in IEC TR 62357-1:2012 without any specification of how it will be used. The issue was evaluated in 2002 by a task force. The conclusion was that IEC 61850 is suitable, but may eventually require the following extensions:

- A new mapping of the communication services on a protocol suitable for wide area communication;
- Extensions of the data model to provide a control centre view of the substation. A further important benefit to users is the possibility of entering configuration information only once.

Currently, substation configuration information is available in the SCL and control centre configuration information is available in the CIM. The models have been harmonized, so that an automatic transfer of the information from one model to the other should be possible. New work will describe how that configuration information can be transferred between CIM and SCL. However, this document does not address the overall topic of CIM/IEC 61850 harmonisation. That will be addressed separately in the future technical report IEC TR 62361-102.

IEC 61850 was initially prepared for information exchange between the devices of a substation automation system. The concepts are now also used in other power system application domains.

This technical report provides a comprehensive overview of the matters that need to be considered in order to use IEC 61850 for information exchange between substations and control or maintenance systems. Areas that require extension of specific parts of the existing IEC 61850 standards will be incorporated in future editions of the affected part of IEC 61850.

A similar report discussing the use of IEC 61850 for communication between substations has been issued as IEC TR 61850-90-1.

The namespace of this technical report is “(Tr)IEC 61850-90-2:2015A”.

COMMUNICATION NETWORKS AND SYSTEMS FOR POWER UTILITY AUTOMATION –

Part 90-2: Using IEC 61850 for communication between substations and control centres

1 Scope

This part of IEC 61850, which is a technical report, provides a comprehensive overview of the different aspects that need to be considered while using IEC 61850 for information exchange between substations and control or maintenance centres or other system level applications. In particular, this technical report:

- defines use cases and communication requirements that require an information exchange between substations and control or maintenance centres
- describes the usage of the configuration language of IEC 61850-6
- gives guidelines for the selection of communication services and architectures compatible with IEC 61850
- describes the engineering workflow
- introduces the use of a Proxy/Gateway concept
- describes the links regarding the Specific Communication Service Mapping (SCSM)

This technical report does not define constraints or limitations for specific device implementations. There is no specific chapter for cyber security which is tackled when it is necessary. The model, for IEC TR 61850-90-2, provides security functions based upon the security threats and security functions found in IEC TS 62351-1 and IEC TS 62351-2. This technical report touches several security aspects with the following basic assumptions:

- Information authentication and integrity (e.g. the ability to provide tamper detection) is needed
- Confidentiality is optional


It shall be possible to provide information authentication and integrity in an end-to-end method, regardless of information hierarchies. The typical method to provide this security function is through some type of information/message authentication code. IEC 62351-4:2007 and IEC 62351-9¹ describe how authentication and integrity is achieved for IEC 61850-8-1. A later version of IEC 62351-4 will provide means to ensure end-to-end data integrity through Proxy/Gateways.

Beneath information authentication and integrity, information availability is an important aspect for telecontrol. This technical report provides redundancy architectures to enhance the availability of information in control and maintenance centres.

The scheme shown in Figure 1 gives an overview of the connectivity and the communication paths. In particular it indicates the principle to access directly or indirectly – via the Proxy/Gateway – to an IED. An application of security controls for substation to control centre communication can be found in IEC 62351-10:2012, 6.4.3. Thus, the substation automation system has to be considered inside a perimeter of cyber security. The access is totally checked by security access points (this document does not describe such a security access

¹ Under consideration.

point). The boundary of the electronic security perimeter is defined by the point, where the communication line leaves the perimeter of the substation over public ground. There might be more than one security access point, where separation of applications (e.g. control centre and maintenance centre) is required. When more than one client needs access to the same security access point information level access control, e.g. according to IEC TS 62351-8:2011, may be added. IEC TS 62351-8:2011 may also be used in other cases, where different access rights are required.

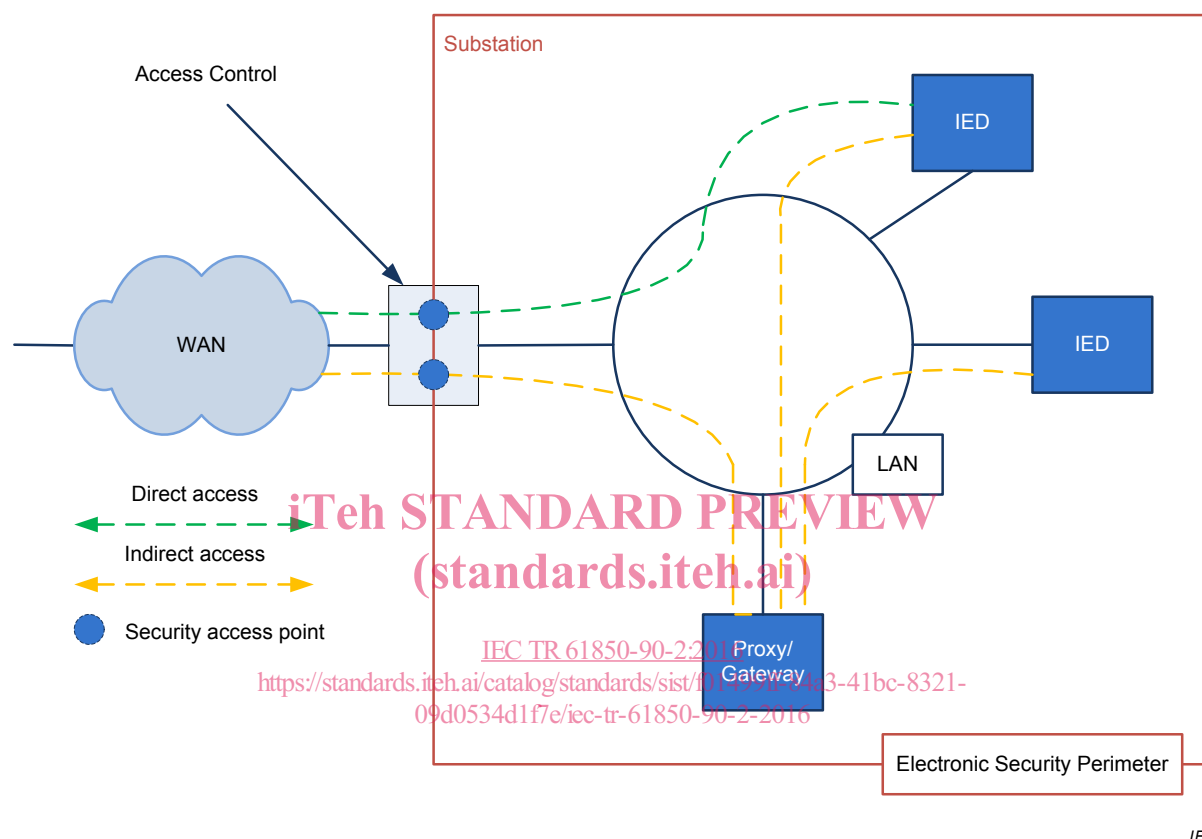

IEC

Figure 1 – Connectivity and communication paths of a substation

The majority of applications for which this technical report is applicable will use the services of MMS (ISO 9506) mapped to ISO/IEC 8802-3 frame formats, as described in IEC 61850-8-1:2011.

The primary application for the use of indirect access, as described in this technical report, will be for telecontrol applications. Nevertheless this technical report does not imply that the use of a Proxy/Gateway is required for telecontrol applications. Direct access may also be used for telecontrol applications where applicable and accepted by the customer.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60870-4:1990, *Telecontrol equipment and systems – Part 4: Performance requirements*

IEC 60870-5-103:1997, *Telecontrol equipment and systems – Part 5-103: Transmission protocols – Companion standard for the informative interface of protection equipment*

IEC 60870-5-104:2006, *Telecontrol equipment and systems – Part 5-104: Transmission protocols – Network access for IEC 60870-5-101 using standard transport profiles*

IEC 61158-6, *Industrial communication networks – Fieldbus specifications*

IEC TS 61850-2:2003, *Communication networks and systems in substations – Part 2: Glossary*

IEC 61850-4:2011, *Communication networks and systems for power utility automation – Part 4: System and project management*

IEC 61850-5:2013, *Communication networks and systems for power utility automation – Part 5: Communication requirements for functions and device models*

IEC 61850-6:2009, *Communication networks and systems for power utility automation – Part 6: Configuration description language for communication in electrical substations related to IEDs*

IEC 61850-7-1:2011, *Communication networks and systems for power utility automation – Part 7-1: Basic communication structure – Principles and models*

IEC 61850-7-2:2010, *Communication networks and systems for power utility automation – Part 7-2: Basic information and communication structure – Abstract communication service interface (ACSI)*

IEC 61850-7-3:2010, *Communication networks and systems for power utility automation – Part 7-3: Basic communication structure – Common data classes*

IEC 61850-7-4:2010, *Communication networks and systems for power utility automation – Part 7-4: Basic communication structure – Compatible logical node classes and data object classes*

IEC 61850-8-1:2011, *Communication networks and systems for power utility automation – Part 8-1: Specific communication service mapping (SCSM) – Mappings to MMS (ISO 9506-1 and ISO 9506-2) and to ISO/IEC 8802-3*

IEC 61850-9-2:2011, *Communication networks and systems for power utility automation – Part 9-2: Specific communication service mapping (SCSM) – Sampled values over ISO/IEC 8802-3*

IEC TS 61850-80-4, *Communication networks and systems for power utility automation – Part 80-4: Translation from COSEM object model (IEC 62056) to the IEC 61850 data model²*

IEC TR 61850-90-3, *Communication networks and systems for power utility automation – Part 90-3: Using IEC 61850 for condition monitoring diagnosis and analysis²*

IEC TR 61850-90-5:2012, *Communication networks and systems for power utility automation – Part 90-5: Use of IEC 61850 to transmit synchrophasor information according to IEEE C37.118*

IEC TR 61850-90-12:2015, *Communication networks and systems for power utility automation – Part 90-12: Wide area network engineering guidelines*

² To be published.

IEC 62056-6, *Electricity metering data exchange – The DLMS/COSEM suite*

IEC TS 62351-4:2007, *Power systems management and associated information exchange – Data and communications security – Part 4: Profiles including MMS*

IEC TS 62351-8:2011, *Power systems management and associated information exchange – Data and communications security – Part 8: Role-based access control*

IEC 62351-9, *Power systems management and associated information exchange – Data and communications security – Part 9: Cyber security key management for power system equipment²*

IEC TR 62351-10:2012, *Power systems management and associated information exchange – Data and communications security – Part 10: Security architecture guidelines*

IEC 62351-11, *Power systems management and associated information exchange – Data and communications security – Part 11: Security for XML Files³*

IEC 81346-1:2009, *Industrial systems, installations and equipment and industrial products – Structuring principles and reference designations – Part 1: Basic rules*

IEC 81346-2:2009, *Industrial systems, installations and equipment and industrial products – Structuring principles and reference designations – Part 2: Classification of objects and codes for classes*

IEEE 1815-2012, *IEEE Standard for Electric Power Systems Communications-Distributed Network Protocol (DNP3)*

RFC 1122:1989, *Requirements for Internet Hosts – Communication Layers*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC TS 61850-2:2003 and IEC 61850-7-2:2010, as well as the following, apply.

3.1 control centre

place where a master station (SCADA, EMS, DMS, GMS, grid operator) receives and processes data coming from substations

Note 1 to entry: The control centre may also perform the functions of a maintenance centre.

3.2 maintenance centre

place from where maintenance, management of asset, disturbance analysis and metering are managed

3.3 Proxy/Gateway

IED containing an IEC 61850 server which services requests of its clients by forwarding requests to other servers through its IEC 61850 client

Note 1 to entry: A Proxy/Gateway optionally alters the client requests or the server's response and sometimes it may serve the request without contacting the specified server, e.g. by maintaining a process data image. In some

³ To be published.