

Edition 3.0 2017-07

INTERNATIONAL STANDARD

Digital audio – Interface for non-linea PCM encoded audio bitstreams applying IEC 60958 – Part 3: Non-linear PCM bitstreams according to the AC-3 and enhanced AC-3 formats

<u>IEC 61937-3:2017</u> https://standards.iteh.ai/catalog/standards/sist/6317be3f-4217-4744-844c-690532179bd8/iec-61937-3-2017





THIS PUBLICATION IS COPYRIGHT PROTECTED Copyright © 2017 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office	Tel.: +41 22 919 02 11
3, rue de Varembé	Fax: +41 22 919 03 00
CH-1211 Geneva 20	info@iec.ch
Switzerland	www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

Stay up to date on all new IEC publications. Just Published IEC Customer Service Centre - webstore.iec.ch/csc details all new publications released. Available online and 37.11 you wish to give us your feedback on this publication or also once a month by emailtips://standards.itch.ai/catalog/standardsed further assistance/ please/contact the Customer Service 690532179bd8/iec-Centre:-csc@lec.ch.





Edition 3.0 2017-07

INTERNATIONAL STANDARD

Digital audio – Interface for hon-linear PCM encoded audio bitstreams applying IEC 60958 – (standards.iteh.ai) Part 3: Non-linear PCM bitstreams according to the AC-3 and enhanced AC-3 formats

https://standards.iteh.ai/catalog/standards/sist/6317be3f-4217-4744-844c-690532179bd8/iec-61937-3-2017

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ICS 33.160.30

ISBN 978-2-8322-4557-6

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FC	REWOF	۶D	3
1	Scope)	5
2	Norma	ative references	5
3	Terms	s, definitions and abbreviated terms	5
	3.7	Abbreviated terms	6
4	Маррі	ing of the audio bitstream on to IEC 61937-1	6
	4.1	General	6
	4.2	AC-3 and enhanced AC-3 burst-info	6
5	Forma	at of AC-3 and enhanced AC-3 data-bursts	7
	5.1	General	7
	5.2	Pause data-burst	7
	5.3	Audio data-bursts	7
	5.3.1	AC-3 data	7
	5.3.2	Latency of AC-3 decoding	8
	5.3.3	Enhanced AC-3 data	
	5.3.4	Latency of the enhanced AC-3 decoder	
Bil	oliograph	iTeh STANDARD PREVIEW	13
		IT EII STANDARD FREVIEW	
Fię	gure 1 –	AC-3 data-burst, with reference point R.it.e.hai.	7
Fię	gure 2 –	Latency of AC-3 decoding	8
Fig	gure 3 –	Enhanced AC-3 data-burst IEC 61937-3:2017	10
Fig	gure 4 –	https://standards.iteh.ai/catalog/standards/sist/6317be3f-4217-4744-844c- Latency of enhanced AC ₇ 3 decoding	11
-		- 09035217900/RC-01957-5-2017	
Та	ble 1 – F	Fields of burst-info	6
Та	ble 2 – F	Repetition period of the pause data-bursts	7
Та	ble 3 – [Data-type-dependent information when data-type bits 0-4 = 1	8
Та	ble 4 – [Data-type-dependent information when data-type bits 0-4 = 21 and data- -6 = 0	
Та	ble 5 – I	Maximum enhanced AC-3 burst-payload size and bitstream data rate per requency and IEC 60958 frame rate	

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DIGITAL AUDIO – INTERFACE FOR NON-LINEAR PCM ENCODED AUDIO BITSTREAMS APPLYING IEC 60958 –

Part 3: Non-linear PCM bitstreams according to the AC-3 and enhanced AC-3 formats

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61937-3 has been prepared by subcommittee technical area 4: Digital system interfaces and protocols, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

This third edition of IEC 61937-3 cancels and replaces the second edition published in 2007. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) removal of support for enhanced AC-3 bitstreams with a sampling frequency of 32 kHz;
- b) updates to normative and informative references;
- c) clarification of pause data-burst usage for enhanced AC-3 bitstreams.

The text of this International Standard is based on the following documents:

CDV	Report on voting		
100/2720/CDV	100/2934/RVC		

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61973 series, published under the general title Digital audio -Interface for non-linear PCM encoded audio bitstreams applying IEC 60958, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

- reconfirmed, •
- withdrawn,
- replaced by a revised edition, or iTeh STANDARD PREVIEW
- amended.

(standards.iteh.ai)

A bilingual version of this publication may be issued at a later date. https://standards.iteh.ai/catalog/standards/sist/6317be3f-4217-4744-844c-690532179bd8/iec-61937-3-2017

DIGITAL AUDIO – INTERFACE FOR NON-LINEAR PCM ENCODED AUDIO BITSTREAMS APPLYING IEC 60958 –

Part 3: Non-linear PCM bitstreams according to the AC-3 and enhanced AC-3 formats

1 Scope

This part of IEC 61937 describes the method used to convey non-linear PCM bitstreams encoded according to the AC-3 and enhanced AC-3 formats.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61937-1:2007, Digital audio interface for non-linear PCM encoded audio bit streams applying IEC 60958 – Part 1: General standards.iteh.ai)

IEC 61937-1:2007/AMD1:2011, Digital audio interface for non-linear PCM encoded audio bit streams applying IEC 60958 – Part 1: General 37-3:2017

https://standards.iteh.ai/catalog/standards/sist/6317be3f-4217-4744-844c-

IEC 61937-2, Digital audio interface for non-linear PCM encoded audio bit streams applying IEC 60958 – Part 2: Burst-info

ETSI TS 102 366, Digital Audio Compression (AC-3, Enhanced AC-3) Standard

3 Terms, definitions and abbreviated terms

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1

block identification flag

flag used to indicate that the first audio block of an enhanced AC-3 syncframe with a stream type value of two formed the first audio block in the AC-3 syncframe from which it was converted

3.2

converter synchronization flag

flag used for synchronization by a device that converts an enhanced AC-3 bitstream to a bitstream compliant with an AC-3 decoder and indicates that the first block in this enhanced AC-3 syncframe will form the first block of the AC-3 syncframe output by the conversion process

3.3

latency

delay time of an external audio decoder to decode an AC-3 or enhanced AC-3 data-burst, defined as the sum of two values: the receiving delay time and the decoding delay time

3.4

stream type

parameter of an enhanced AC-3 syncframe identifying the type of substream of which the syncframe is a part

Note 1 to entry: An enhanced AC-3 bitstream is constructed from one or more substreams, with each substream being constructed from a sequence of syncframes.

3.5

substream identification

parameter of an enhanced AC-3 syncframe which, in conjunction with the stream type parameter, identifies the substream in the bitstream of which the syncframe is a part

3.6

syncframe

minimum portion of the AC-3 or enhanced AC-3 audio serial bitstream capable of being fully decoded, also known as a synchronization frame

3.7 Abbreviated terms

ATSC	Advanced Television Systems Committee $old V$	EW
------	---	-----------

ETSI European Telecommunications Standards Institute

4 Mapping of the audio bitstream on to IEC 61937-1

4.1 General https://standards.iteh.ai/catalog/standards/sist/6317be3f-4217-4744-844c-690532179bd8/iec-61937-3-2017

The coding of the bitstream and data-burst is in accordance with IEC 61937-1, IEC 61937-1:2007/AMD1:2011 and IEC 61937-2, including field names such as "Pc", "Pa" and "R".

4.2 AC-3 and enhanced AC-3 burst-info

The 16-bit burst-info contains information about the data that will be found in the data-burst (see Table 1).

Bits of Pc	Data-type bits 0-4	Data-type bits 5-6	Contents	Reference point R	Repetition period of data-burst measured in IEC 60958 frames	
0 to 6	1	0	AC-3	R-AC-3	1 536	
		1 to 3	Reserved According to IEC 61937			
	2 to 20					
21 0 Enh		Enhanced AC-3	Bit 0 of Pa	6 144		
1 to 3 According				ording to IEC 61937		
22 to 31				According to IEC 61937		
7 to 15	According to IEC 61937					

Table 1 – Fields of burst-info

- 6 -

5 Format of AC-3 and enhanced AC-3 data-bursts

5.1 General

This clause specifies the audio data-bursts AC-3 and enhanced AC-3. Specific properties such as reference points, repetition periods, the method of filling stream gaps and decoding latency are specified.

The decoding latency (or delay), indicated for the data-type bits 0-4, should be used by the transmitter to schedule data-bursts as necessary to establish synchronization between picture and decoded audio.

5.2 Pause data-burst

Pause data-bursts for AC-3 and enhanced AC-3 are given in Table 2.

Table 2 – Repetition period of the pause data-bursts

Data-type bits 0-4 of audio data-burst	Repetition	period of pause data-burst
	Mandatory	Recommended
AC-3	-	3 IEC 60958 frames
Enhanced AC-3	-	4 IEC 60958 frames

iTeh STANDARD PREVIEW

(standards.iteh.ai)

5.3 Audio data-bursts

5.3.1 AC-3 data

The AC-3 bitstream consists of a sequence of AC-3 syncframes. The data-type bits 0-4 of an AC 3 data-burst is 1. An AC-3 syncframe represents 1 536 samples of each encoded audio channel (left, centre, etc.). The data-burst is headed with a burst-preamble followed by the burst-payload. The burst-payload of each data-burst of AC-3 data shall contain one complete AC-3 syncframe. Figure 1 shows the structure of the AC-3 data-burst.

The length of the AC-3 data-burst will depend on the encoded bit rate (which determines the AC-3 syncframe size). The AC-3 bitstream is specified in ETSI TS 102 366 (see also ATSC A/52:2012).

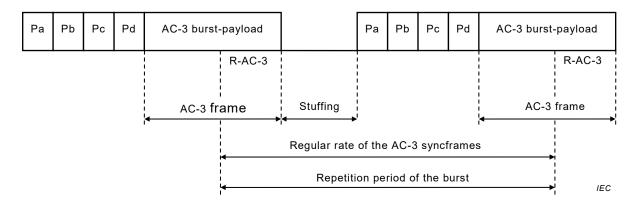


Figure 1 – AC-3 data-burst, with reference point R

The data-type-dependent info for bits 0-4 of AC-3 is given in Table 3.