



SLOVENSKI STANDARD

SIST EN 3832:2005

01-junij-2005

BUXca Yý U
SIST EN 3832:2004

Aerospace series - Bolts, double hexagon head, relieved shank, long thread, in heat resisting nickel base alloy NI-PH2601 (Inconel 718) - Classification: 1 550 MPa (at ambient temperature) / 650 °C

Aerospace series - Bolts, double hexagon head, relieved shank, long thread, in heat resisting nickel base alloy NI-PH2601 (Inconel 718) - Classification: 1 550 MPa (at ambient temperature) / 650 °C

Luft- und Raumfahrt - Zwölfkantschrauben, Dünnschaft, langes Gewinde, aus hochwärmfester Nickelbasislegierung NI-PH2601 (Inconel 718) - Klasse: 1 550 MPa (bei Raumtemperatur) / 650 °C

Série aérospatiale - Vis a tete bihexagonale, fut dégagé, filetage long, en alliage résistant a chaud a base de nickel NI-PH2601 (Inconel 718) - Classification : 1 550 MPa (a température ambiante) / 650 °C

Ta slovenski standard je istoveten z: EN 3832:2004

ICS:

49.030.20 Sorniki, vijaki, stebelni vijaki Bolts, screws, studs

SIST EN 3832:2005

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3832:2005

<https://standards.iteh.ai/catalog/standards/sist/f427a48b-eb22-468b-b795-1ba701e9e977/sist-en-3832-2005>

English version

**Aerospace series - Bolts, double hexagon head, relieved shank,
long thread, in heat resisting nickel base alloy NI-PH2601
(Inconel 718) - Classification: 1 550 MPa (at ambient
temperature) / 650° C**

Série aérospatiale - Vis à tête bihexagonale, fût dégagé,
filetage long, en alliage résistant à chaud à base de nickel
NI-PH2601 (Inconel 718) - Classification : 1 550 MPa (à
température ambiante) / 650° C

Luft- und Raumfahrt - Zwölfkantschrauben, Dünnschaft,
langes Gewinde, aus hochwarmfester Nickelbasislegierung
NI-PH2601 (Inconel 718) - Klasse: 1 550 MPa (bei
Raumtemperatur) / 650° C

This European Standard was approved by CEN on 11 September 2003.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

[SIST EN 3832:2005](https://standards.iteh.ai/standards/EN/EN-3832-2005)

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents	Page
Foreword.....	3
1 Scope	4
2 Normative references	4
3 Required characteristics	4
4 Designation	8
5 Marking	8
6 Technical specification	8

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 3832:2005](https://standards.iteh.ai/catalog/standards/sist/f427a48b-eb22-468b-b795-1ba701e9e977/sist-en-3832-2005)

<https://standards.iteh.ai/catalog/standards/sist/f427a48b-eb22-468b-b795-1ba701e9e977/sist-en-3832-2005>

Foreword

This document (EN 3832:2004) has been prepared by the European Association of Aerospace Manufacturers - Standardization (AECMA-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2005, and conflicting national standards shall be withdrawn at the latest by May 2005.

This document supersedes EN 3832:2003.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 3832:2005](#)

<https://standards.iteh.ai/catalog/standards/sist/f427a48b-eb22-468b-b795-1ba701e9e977/sist-en-3832-2005>

EN 3832:2004 (E)

1 Scope

This standard specifies the characteristics of double hexagon headed bolts, with relieved shank and long thread, in NI-PH2601, for aerospace applications.

Classification: 1 550 MPa ¹⁾ / 650 °C ²⁾

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3353-1, *Aerospace – Lead and runout threads – Part 1: Rolled external threads*

ISO 4095, *Aerospace – Bihexagonal drives – Wrenching configuration – Metric series*

ISO 5855-2, *Aerospace – MJ threads – Part 2: Limit dimensions for bolts and nuts*

EN 2424, *Aerospace series – Marking of aerospace products*

EN 2952, *Aerospace series – Heat resisting alloy NI-PH2601 – Solution treated and cold worked – Bar for forged fasteners – $D \leq 50 \text{ mm} – 1\,270 \text{ MPa} \leq R_m \leq 1\,550 \text{ MPa}$ ³⁾*

EN 3666, *Aerospace series – Heat resisting alloy NI-PH2601 – Solution treated and cold worked – Bar for forged fasteners – $D \leq 50 \text{ mm} – 1\,550 \text{ MPa} \leq R_m \leq 1\,830 \text{ MPa}$ ³⁾*

EN 3833, *Aerospace series – Bolts, MJ threads, in heat resisting nickel base alloy NI-PH2601 (Inconel 718), passivated. Classification: 1 550 MPa (at ambient temperature) / 650 °C – Technical specification*

3 Required characteristics**3.1 Configuration – Dimensions – Tolerances – Masses**

See Figure 1 and Tables 1 and 2.

Dimensions and tolerances are in millimetres.

3.2 Materials

EN 3666 or EN 2952 with exception of final heat treatment which shall meet EN 3666 (reference heat treatment and relating mechanical properties).

1) Minimum tensile strength of the material at ambient temperature

2) Maximum test temperature of the parts

3) Published as AECMA Prestandard at the date of publication of this standard

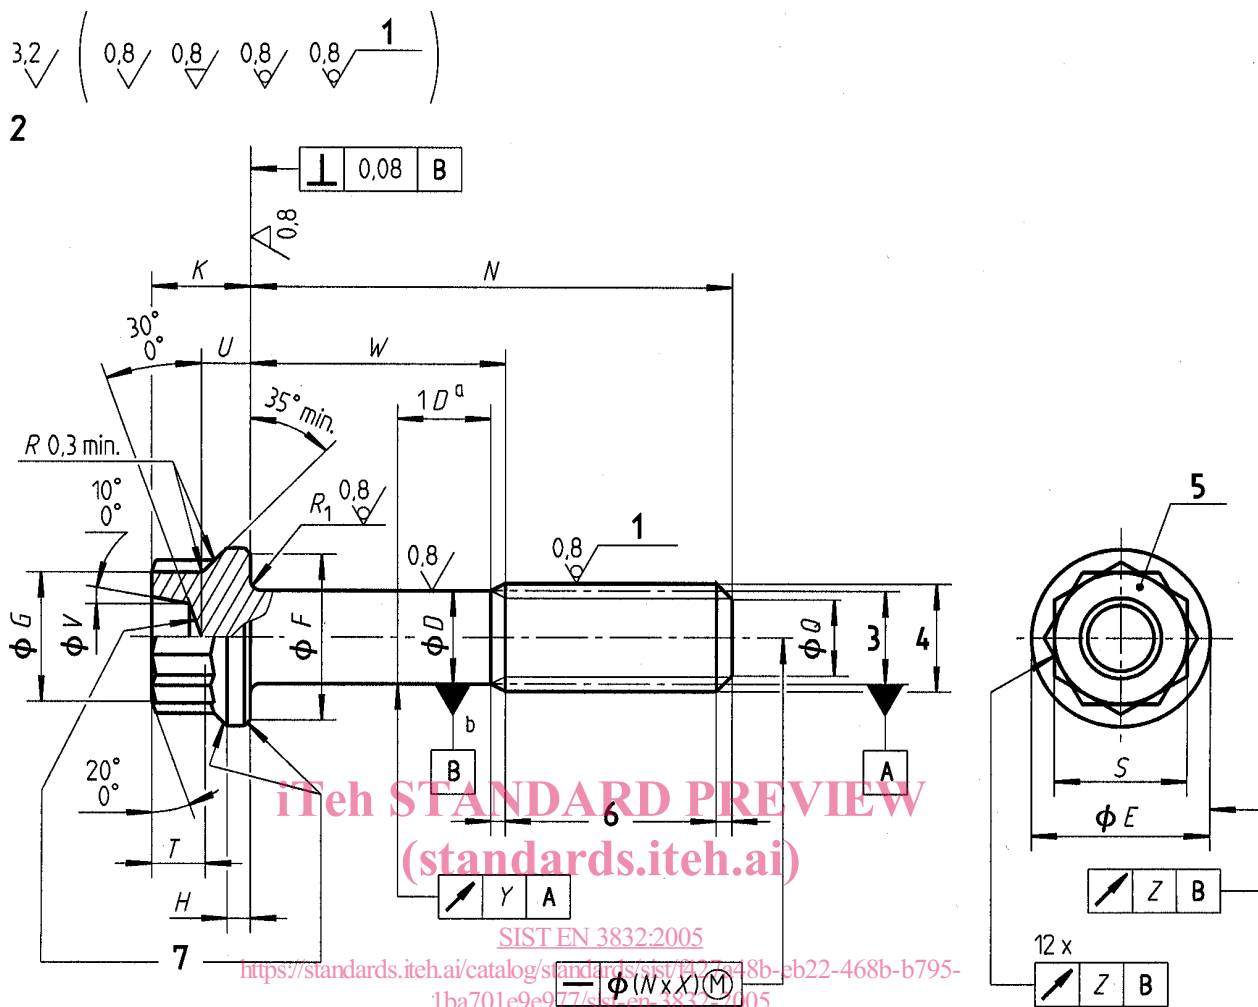


Figure 1

Table 1

Code	Thread ^a Designation	D	E	F	G	H	K	Q	R_1		S^b	T	U		V		X	Y	Z	
		$\pm 0,13$	max.	min.	min.	min.	h15	$\pm 0,5$	max.	min.		min.	max.	min.	max.	min.				
050	MJ5x 0,8-4h6h	4,48	9,1	8,3	6,8	1	5,5	3,4	0,5	0,3	7	2	2,9	2,5	3,7	3,2	0,003	0,12	0,13	
060	MJ6x1-4h6h	5,35	10,6	9,8	7,8	1,2	6	4,2	0,7	0,5	8	2,3	3,2	2,8	4,6	4,1			0,15	
070	MJ7x1-4h6h	6,35	12,1	11,3	8,8	1,4	6,5	5,2			9	2,6	3,7	3,3	5,4	4,9		0,15	0,18	
080	MJ8x1-4h6h	7,35	13,6	12,8	9,8	1,6	7	6,2	0,6	0,6	10	2,8	4,1	3,7	5,7	5,2	0,0025		0,15	0,2
100	MJ10x1,25-4h6h	9,19	16,7	15,7	11,8	2	8	7,9			0,8	12	3,1	5,1	4,7	7,2		6,7		0,0025
120	MJ12x1,25-4h6h	11,19	19,9	18,8	13,7	2,4	9,2	9,8			0,9	14	3,5	6	5,6	8,5	8	0,18	0,3	

^a In accordance with ISO 5855-2.

^b Bihexagonal wrenching configuration in conformity with ISO 4095 over length T min.

Table 2

Length code	N ± 0,3	Thread code																	
		050			060			070			080			100			120		
		W max.	min.	Mass ^a	W max.	min.	Mass ^a	W max.	min.	Mass ^a	W max.	min.	Mass ^a	W max.	min.	Mass ^a	W max.	min.	Mass ^a
008	8			3,26	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
010	10			3,52			5,11			7,19			9,62	—	—	—	—	—	—
012	12			3,78			5,48			7,71			10,32	—	—	—	—	—	—
014	14			4,04			5,85			8,23			11,02			18,01	—	—	—
016	16			4,29			6,22			8,75			11,71			19,10			29,41
018	18			4,55			6,59			9,27			12,41			20,19			31,03
020	20	4	2,5	4,81			6,95			9,79			13,11			21,28			32,64
022	22	6	4,5	5,07	4	2,5	7,32			10,31			13,81			22,37			34,25
024	24	8	6,5	5,33	6	4,5	7,69	4	2,5	10,83			14,51			23,45			35,87
026	26	10	8,5	5,59	8	6,5	8,06	6	4,5	11,36	4	2,5	15,20			24,54			37,48
028	28	12	10,5	5,85	10	8,5	8,43	8	6,5	11,88	6	4,5	15,90			25,63			39,10
030	30	14	12,5	6,11	12	10,5	8,80	10	8,5	12,40	8	6,5	16,60	4	2,7	26,72			40,71
032	32	16	14,5	6,37	14	12,5	9,17	12	10,5	12,92	10	8,5	17,30	6	4,5	27,81			42,32
034	34	18	16,5	6,63	16	14,5	9,54	14	12,5	13,44	12	10,5	17,99	8	6,5	28,90	4	2,8	43,94
036	36	20	18,5	6,89	18	16,5	9,91	16	14,5	13,96	14	12,5	18,69	10	8,5	29,98	6	4,5	45,55
038	38	22	20,5	7,15	20	18,5	10,28	18	16,5	14,48	16	14,5	19,39	12	10,5	31,07	8	6,5	47,17
040	40	24	22,5	7,40	22	20,5	10,65	20	18,5	15,00	18	16,5	20,09	14	12,5	32,16	10	8,5	48,78
042	42	26	24,5	7,66	24	22,5	11,02	22	20,5	15,52	20	18,5	20,78	16	14,5	33,25	12	10,5	50,40
044	44	28	26,5	7,92	26	24,5	11,39	24	22,5	16,04	22	20,5	21,48	18	16,5	34,34	14	12,5	52,01
046	46	30	28,5	8,18	28	26,5	11,76	26	24,5	16,56	24	22,5	22,18	20	18,5	35,43	16	14,5	53,62
048	48	32	30,5	8,44	30	28,5	12,13	28	26,5	17,08	26	24,5	22,88	22	20,5	36,51	18	16,5	55,24
050	50	34	32,5	8,70	32	30,5	12,50	30	28,5	17,60	28	26,5	23,57	24	22,5	37,60	20	18,5	56,85
052	52	36	34,5	8,96	34	32,5	12,87	32	30,5	18,12	30	28,5	24,27	26	24,5	38,69	22	20,5	58,47
054	54	38	36,5	9,22	36	34,5	13,24	34	32,5	18,65	32	30,5	24,97	28	26,5	39,78	24	22,5	60,08
056	56	40	38,5	9,48	38	36,5	13,61	36	34,5	19,17	34	32,5	25,67	30	28,5	40,87	26	24,5	61,69
058	58	42	40,5	9,74	40	38,5	13,98	38	36,5	19,69	36	34,5	26,36	32	30,5	41,96	28	26,5	63,31
060	60	44	42,5	10,00	42	40,5	14,35	40	38,5	20,21	38	36,5	27,06	34	32,5	43,04	30	28,5	64,92
062	62	46	44,5	10,26	44	42,5	14,72	42	40,5	20,73	40	38,5	27,76	36	34,5	44,13	32	30,5	66,54
064	64	48	46,5	10,51	46	44,5	15,09	44	42,5	21,25	42	40,5	28,46	38	36,5	45,22	34	32,5	68,15
066	66	50	48,5	10,77	48	46,5	15,46	46	44,5	21,77	44	42,5	29,16	40	38,5	46,31	36	34,5	69,76
068	68	52	50,5	11,03	50	48,5	15,83	48	46,5	22,29	46	44,5	29,85	42	40,5	47,40	38	36,5	71,38

continued

Table 2 (concluded)

Length code	N ± 0,3	Thread code																	
		050			060			070			080			100			120		
		W	Mass ^a	Mass ^a	W	Mass ^a	Mass ^a	W	Mass ^a	Mass ^a	W	Mass ^a	Mass ^a	W	Mass ^a	Mass ^a	W	Mass ^a	Mass ^a
max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.
070	70	54	52,5	11,29	52	50,5	16,20	50	48,5	22,81	48	46,5	30,55	44	42,5	48,48	40	38,5	72,99
072	72	–	–	–	54	52,5	16,56	52	50,5	23,33	50	48,5	31,25	46	44,5	49,57	42	40,5	74,61
074	74	–	–	–	56	54,5	16,93	54	52,5	23,85	52	50,5	31,95	48	46,5	50,66	44	42,5	76,22
076	76	–	–	–	58	56,5	17,30	56	54,5	24,37	54	52,5	32,67	50	48,5	51,75	46	44,5	77,83
078	78	–	–	–	60	58,5	17,67	58	56,5	24,89	56	54,5	33,34	52	50,5	52,84	48	46,5	79,45
080	80	–	–	–	62	60,5	18,04	60	58,5	25,41	58	56,5	34,04	54	52,5	53,93	50	48,5	81,06
082	82	–	–	–	64	62,5	18,41	62	60,5	25,94	60	58,5	34,74	56	54,5	55,01	52	50,5	82,68
084	84	–	–	–	66	64,5	18,78	64	62,5	26,46	62	60,5	35,43	58	56,6	56,10	54	52,5	84,29
086	86	–	–	–	–	–	–	66	64,5	26,98	64	62,5	36,13	60	58,5	57,19	56	54,5	85,91
088	88	–	–	–	–	–	–	68	66,5	27,50	66	64,5	36,83	62	60,5	58,28	58	56,5	87,52
090	90	–	–	–	–	–	–	70	68,5	28,02	68	66,5	37,53	64	62,5	59,37	60	58,5	89,13
092	92	–	–	–	–	–	–	72	70,5	28,54	70	68,5	38,22	66	64,5	60,46	62	60,5	90,75
094	94	–	–	–	–	–	–	74	72,5	29,06	72	70,5	38,92	68	66,5	61,54	64	62,5	92,36
096	96	–	–	–	–	–	–	76	74,5	29,58	74	72,5	39,62	70	68,5	62,63	66	64,5	93,98
098	98	–	–	–	–	–	–	78	76,5	30,10	76	74,5	40,32	72	70,5	63,72	68	66,5	95,59
100	100	–	–	–	–	–	–	–	–	–	78	76,5	41,02	74	72,5	64,81	70	68,5	97,20
104	104	–	–	–	–	–	–	–	–	–	82	80,5	42,41	78	76,5	66,99	74	72,5	100,43
108	108	–	–	–	–	–	–	–	–	–	86	84,5	43,81	82	80,5	69,16	78	76,5	103,66
112	112	–	–	–	–	–	–	–	–	–	90	88,5	45,20	86	84,5	71,34	82	80,5	106,89
116	116	–	–	–	–	–	–	–	–	–	–	–	–	90	88,5	73,51	86	84,5	110,12
120	120	–	–	–	–	–	–	–	–	–	–	–	–	94	92,5	75,69	90	88,5	113,35
124	124	–	–	–	–	–	–	–	–	–	–	–	–	98	96,5	77,87	94	92,5	116,57
128	128	–	–	–	–	–	–	–	–	–	–	–	–	102	100,5	80,04	98	96,5	119,80
132	132	–	–	–	–	–	–	–	–	–	–	–	–	106	104,5	82,22	102	100,5	123,03
136	136	–	–	–	–	–	–	–	–	–	–	–	–	110	108,5	84,40	106	104,5	126,26
140	140	–	–	–	–	–	–	–	–	–	–	–	–	114	112,5	86,57	110	108,5	129,49
144	144	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	114	112,5	132,71
148	148	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	118	116,5	135,94
152	152	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	122	120,5	139,17
156	156	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	126	124,5	142,40
160	160	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	130	128,5	145,63
164	164	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	134	132,5	148,86
168	168	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	138	136,5	152,09

^a Mass = quoted in kg/1 000 parts