



SLOVENSKI STANDARD

SIST EN 4013:2005

01-junij-2005

BUXca Yý U
SIST EN 4013:2004

Aerospace series - Shank nuts, self-locking, in heat resisting nickel base alloy NI-PH2601 (Inconel 718), silver plated - Classification: 1 550 MPa (at ambient temperature) / 600 °C

Aerospace series - Shank nuts, self-locking, in heat resisting nickel base alloy NI-PH2601 (Inconel 718), silver plated - Classification: 1 550 MPa (at ambient temperature) / 600 °C

Luft- und Raumfahrt - Einnietmuttern, selbstsichernd, aus hochwarmfester Nickelbasislegierung NI-PH2601 (Inconel 718), versilbert - Klasse: 1 550 MPa (bei Raumtemperatur) / 600 °C

Série aérospatiale - Écrous a sertir, a freinage interne, en alliage résistant a chaud a base de nickel NI-PH2601 (Inconel 718), argentés - Classification : 1 550 MPa (a température ambiante) / 600 °C

Ta slovenski standard je istoveten z: EN 4013:2004

ICS:

49.030.30 Matice Nuts

SIST EN 4013:2005 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 4013:2005

<https://standards.iteh.ai/catalog/standards/sist/9f99769-69e1-447d-b004-3d74693695c4/sist-en-4013-2005>

English version

Aerospace series - Shank nuts, self-locking, in heat resisting nickel base alloy NI-PH2601 (Inconel 718), silver plated - Classification: 1 550 MPa (at ambient temperature) / 600° C

Série aéronautique - Écrous à sertir, à freinage interne, en alliage résistant à chaud à base de nickel NI-PH2601 (Inconel 718), argentés - Classification : 1 550 MPa (à température ambiante) / 600° C

Luft- und Raumfahrt - Einnietmuttern, selbstsichernd, aus hochwarmfester Nickelbasislegierung NI-PH2601 (Inconel 718), versilbert - Klasse: 1 550 MPa (bei Raumtemperatur) / 600° C

This European Standard was approved by CEN on 11 September 2003.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
 COMITÉ EUROPÉEN DE NORMALISATION
 EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents	Page
Foreword.....	3
1 Scope	4
2 Normative references	4
3 Required characteristics	4
4 Designation	6
5 Marking	6
6 Technical specification	6

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 4013:2005](#)

<https://standards.iteh.ai/catalog/standards/sist/9f99769-69e1-447d-b004-3d74693695c4/sist-en-4013-2005>

Foreword

This document (EN 4013:2004) has been prepared by the European Association of Aerospace Manufacturers - Standardization (AECMA-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2005, and conflicting national standards shall be withdrawn at the latest by May 2005.

This document supersedes EN 4013:2003.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 4013:2005](https://standards.iteh.ai/catalog/standards/sist/9f99769-69e1-447d-b004-3d74693695c4/sist-en-4013-2005)

<https://standards.iteh.ai/catalog/standards/sist/9f99769-69e1-447d-b004-3d74693695c4/sist-en-4013-2005>

EN 4013:2004 (E)

1 Scope

This standard specifies the characteristics of self-locking, shank nuts, in NI-PH2601, silver plated, for aerospace applications.

Classification: 1 550 MPa ¹⁾ / 600 °C ²⁾

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5855-2, *Aerospace – MJ threads – Part 2: Limit dimensions for bolts and nuts*

EN 2424, *Aerospace series – Marking of aerospace products*

EN 2786, *Aerospace series – Electrolytic silver plating of fasteners* ³⁾

EN 2952, *Aerospace series – Heat resisting alloy NI-PH2601 – Solution treated and cold worked – Bar for forged fasteners – $D \leq 50$ mm – $1\ 270$ MPa $\leq R_m \leq 1\ 550$ MPa* ³⁾

EN 4047, *Aerospace series – Nuts, self-locking, MJ threads, in heat resisting nickel base alloy NI-PH2601 (Inconel 718), silver plated – Classification: 1 550 MPa (at ambient temperature) / 600 °C – Technical specification*

(standards.iteh.ai)

3 Required characteristics

SIST EN 4013:2005

3.1 Configuration – Dimensions – Tolerances – Masses

<https://standards.iteh.ai/catalog/standards/sist/9f99769-69e1-447d-b004-5d74b9969507/sist-en-4013-2005>

See Figure 1 and Table 1.

Dimensions and tolerances are in millimetres. They apply after silver plating.

3.2 Material

EN 2952

3.3 Surface treatment

EN 2786


Thickness:

- external surfaces: 5 μ m to 15 μ m;
- thread \geq MJ6: 5 μ m min., shall be measured at the pitch diameter;
- thread MJ5: shall show complete coverage, without thickness requirement.

1) Correspond to the minimum tensile stress which the nut is able to withstand at ambient temperature without breaking or cracking when tested with a bolt of a higher strength class.

2) Maximum test temperature of the parts

3) Published as AECMA Prestandard at the date of publication of this standard

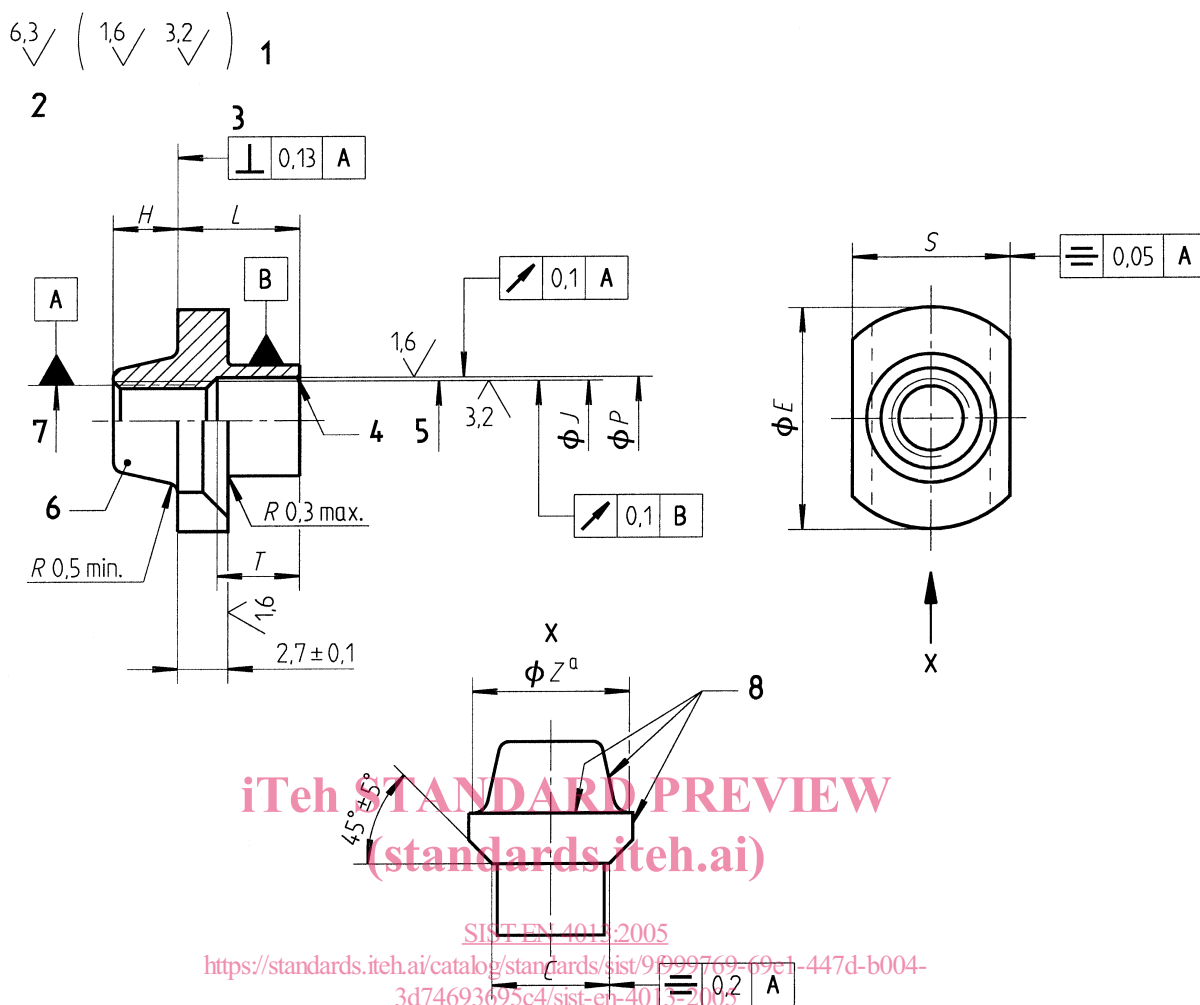**Key**

- 1 values applicable before silver plating. Thread surface will be as achieved by normal methods of manufacture.
- 2 remove sharp edges 0,1 to 0,4
- 3 not convex
- 4 chamfer or radius 0,08 max.
- 5 thread
- 6 form out-of-round in this area to achieve the self-locking requirement (tooling marks permissible)
- 7 pitch diameter
- 8 marking in these areas but not in locking area

Details of form not stated are left to the manufacturer's discretion.

^a Limit of the blend radius

Figure 1**Table 1**


Code	Thread ^a	C ± 0,1	E ± 0,25	H h14	J + 0,1 0	L + 0,2 0	P 0 - 0,1	S ± 0,1	T ± 0,25	Z max.	Mass kg/1 000 parts ≈
	Designation										
050	MJ5×0,8-4H6H	7	13	7	5,2	1,8	6,5	9,5	2,4	8,5	2,78
060	MJ6×1-4H5H	8	14	8	6,2		7,5	10,5		9,5	3,45
070	MJ7×1-4H5H	9	16	9	7,2	2,8	8,5	11,5	3,4	10,5	4,28
080	MJ8×1-4H5H	10	17	10	8,2	3,2	9,5	12,5	3,9	11,5	5,56

^a In accordance with ISO 5855-2. In the self-locking zone, the tolerances apply before forming out-of-round.

EN 4013:2004 (E)

4 Designation

EXAMPLE

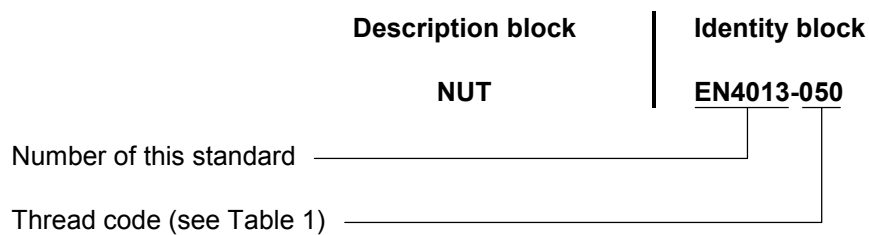

NOTE If necessary, the code I9005 shall be placed between the description block and the identity block.

5 Marking

EN 2424, style A, as indicated on Figure 1.

6 Technical specification

EN 4047

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 4013:2005

<https://standards.iteh.ai/catalog/standards/sist/9f99769-69e1-447d-b004-3d74693695c4/sist-en-4013-2005>