



SLOVENSKI STANDARD

oSIST prEN 50411-3-6:2011

01-februar-2011

Delilniki za optična vlakna in kabelske spojnice za optične komunikacijske sisteme
- Specifikacija izdelka - 3-6. del: Večrodna mehanska optična spojnica

Fibre organisers and closures to be used in optical fibre communication systems -
Product specifications - Part 3-6: Multimode mechanical fibre splice

iTeh Standards
(<https://standards.iteh.ai>)

Ta slovenski standard je istoveten z: prEN 50411-3-6:2010

[SIST EN 50411-3-6:2013](https://standards.iteh.ai/catalog/standards/sist/802e6b68-d561-4278-9e9c-a8979c5940a5/sist-en-50411-3-6-2013)

<https://standards.iteh.ai/catalog/standards/sist/802e6b68-d561-4278-9e9c-a8979c5940a5/sist-en-50411-3-6-2013>

ICS:

33.180.20	Povezovalne naprave za optična vlakna	Fibre optic interconnecting devices
-----------	---------------------------------------	-------------------------------------

oSIST prEN 50411-3-6:2011

en,fr,de

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

DRAFT
prEN 50411-3-6

December 2010

ICS

English version

**Fibre organisers and closures to be used
in optical fibre communication systems -
Product specifications -
Part 3-6: Multimode mechanical fibre splice**

To be completed

To be completed

This draft European Standard is submitted to CENELEC members for CENELEC enquiry.
Deadline for CENELEC: 2011-05-20.

It has been drawn up by CLC/TC 86BXA.

If this draft becomes a European Standard, CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CENELEC in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Management Centre: Avenue Marnix 17, B - 1000 Brussels

1

Foreword

2 This draft European Standard was prepared by the Technical Committee CENELEC TC 86BXA, Fibre optic
3 interconnect, passive and connectorised components. It is submitted to the CENELEC enquiry.

4

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

SIST EN 50411-3-6:2013

<https://standards.iteh.ai/catalog/standards/sist/802e6b68-d561-4278-9e9c-a8979c5940a5/sist-en-50411-3-6-2013>

**Fibre organisers and closures to be used in optical fibre communication systems –
Product specifications**


Part 3-6: Multimode mechanical fibre splice

Description		Performance	
Type:	Fibre splice	Application:	EN 61753-1:2007, Category U with extension of lower temperature to -40 °C
Style:	Mechanical		
Operating wavelength:	850 nm and 1 300 nm	Attenuation grades	≤ 0,25 dB maximum (97 %)
Fibre category	EN 60793-2-10:2007, type A1a.1, A1a.2, A1a.3 and A1b	Return loss grades	≥ 20 dB

Related documents:

EN 60793-2-10:2007	Optical fibres – Part 2-10: Product specifications – Sectional specification for category A1 multimode fibres (IEC 60793-2-10:2007)
EN 60794-2-50	Optical fibre cables – Part 2-50: Indoor cables – Family specification for simplex and duplex cables for use in terminated cable assemblies (IEC 60794-2-50)
EN 61300 series	Fibre optic interconnecting devices and passive components – Basic test and measurement procedures (IEC 61300 series)
EN 61753-1:2007	Fibre optic interconnecting devices and passive components performance standard – Part 1: General and guidance for performance standards (IEC 61753-1:2007)

Outline and maximum dimensions:

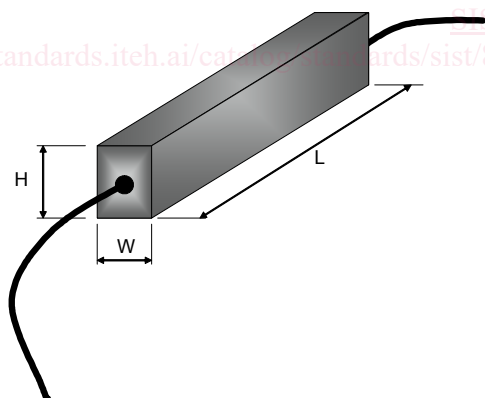

Variant	Dimension W mm	Dimension H mm	Dimension L mm
Type M1	3,8	6,4	38
Type M2	4,0	4,0	36
Type M3	3,2	3,2	45
Type M4	4,2	4,2	44
Type M5	4,0	4,0	40
Type M6	Ø 5,0		65

Contents

5		
6	1 Scope	5
7	1.1 Product definition	5
8	1.2 Interoperability	5
9	1.3 Expected performance	5
10	1.4 Operating environment	5
11	1.5 Reliability	5
12	1.6 Quality assurance	5
13	2 Normative references	6
14	3 Description	7
15	3.1 Mechanical splice	7
16	3.2 Materials	7
17	3.3 Dimensions	7
18	3.4 Colour and marking	7
19	4 Variants	8
20	5 Dimensional requirements	8
21	6 Tests	9
22	6.1 Introduction	9
23	6.2 Test sample preparation	9
24	6.3 Test and measurement methods	9
25	6.4 Pass/fail criteria	9
26	7 Test report	9
27	8 Performance requirements	9
28	8.1 Dimensional and marking requirements	9
29	8.2 Installation yield requirement	10
30	8.3 Optical performance requirements	10
31	Annex A (normative) Fibre type	16
32	Annex B (normative) Sample size and product sourcing requirements	17
33	Bibliography	18
34	Figures	
35	Figure 1 – Outline and maximum dimensions	8
36	Tables	
37	Table 1 – Optical fibre mechanical splice, for category U – variants	8
38	Table 2 – Test details and requirements	10
39	Table A.1 – Fibre type characteristics	16
40	Table B.1 – Sample size per test	17
41		

42 1 Scope

43 1.1 Product definition

44 This standard contains the initial, start of life dimensional, optical, mechanical and environmental
45 performance requirements, which a multimode mechanical splice must meet in order for it to be categorised
46 as an EN standard product.

47 Since different variants and grades of performance are permitted, product marking and identification details
48 are given in 3.5.

49 Although in this document the product is qualified for EN 60793-2-10:2007, type A1a.1, A1a.2, A1a.3 and A1b
50 multimode fibres it may also be suitable for other fibre types.

51 1.2 Interoperability

52 The installed mechanical splice fits into a fibre management system with optical fibre splice cassettes or
53 splice trays. This standard specifies the following two physical interface dimensions:

- 54 • cross sectional profile with width, height or diameter (in millimetres);
- 55 • length (in millimetres).

56 1.3 Expected performance

57 In this document, the performance of a mechanical splice is given with identical fibres only. Losses
58 associated with fibre cladding diameter and mode field mismatch are not taken into account. The measured
59 attenuation is a function of the core concentricity, cladding non-circularity and alignment capability.
60 The optical return loss performance is a function of the index matching gel and the fibre end face preparation.

61 1.4 Operating environment

62 The tests selected combined with the severities and durations are representative of an outdoor enclosed
63 environment defined as category U in EN 61753-1:2007. To ensure that the product can be used in closures,
64 boxes or street cabinet for categories A, G and S (as defined EN 61753-1:2007) the specified lower
65 temperature is extended to -40 °C and requirements for temporary flooding have been added.

66 1.5 Reliability

67 Whilst the anticipated service life expectancy of the product in this environment is 20 years, compliance with
68 this specification does not guarantee the reliability of the product. This should be predicted using a
69 recognised reliability assessment programme.

70 1.6 Quality assurance

71 Compliance with this specification does not guarantee the manufacturing consistency of the product.
72 This should be maintained using a recognised quality assurance programme.

73 2 Normative references

74 The following referenced documents are indispensable for the application of this document. For dated
75 references, only the edition cited applies. For undated references, the latest edition of the referenced
76 document (including any amendments) applies.

EN 60793-2-10:2007	Optical fibres - Part 2-10: Product specifications – Sectional specification for category A1 multimode fibres (IEC 60793-2-10:2007)
EN 61753-1:2007	Fibre optic interconnecting devices and passive components performance standard – Part 1: General and guidance for performance standards (IEC 61753-1:2007)
EN 61300 series	Fibre optic interconnecting devices and passive components – Basic test and measurement procedures (IEC 61300 series)
EN 61300-2-1	Part 2-1: Tests – Vibration (sinusoidal) (IEC 61300-2-1)
EN 61300-2-4	Part 2-4: Tests – Fibre/cable retention (IEC 61300-2-4)
EN 61300-2-5	Part 2-5: Tests – Torsion/twist (IEC 61300-2-5)
EN 61300-2-7	Part 2-7: Tests – Bending moment (IEC 61300-2-7)
EN 61300-2-9	Part 2-9: Tests – Shock (IEC 61300-2-9)
EN 61300-2-17	Part 2-18: Tests – Cold (IEC 61300-2-17)
EN 61300-2-18	Part 2-18: Tests – Dry heat – High temperature endurance (IEC 61300-2-18)
EN 61300-2-22:2007	Part 2-22: Tests – Change of temperature (IEC 61300-2-22:2007)
EN 61300-2-26	Part 2-26: Tests – Salt mist (IEC 61300-2-26)
EN 61300-2-27	Part 2-27: Tests – Dust – Laminar flow (IEC 61300-2-27)
EN 61300-2-33	Part 2-33: Tests – Assembly and disassembly of fibre optic closures (IEC 61300-2-33)
EN 61300-2-45	Part 2-45: Tests – Durability test by water immersion (IEC 61300-2-45)
EN 61300-3-3:2009	Part 3-3: Examinations and measurements – Active monitoring of changes in attenuation and return loss (IEC 61300-3-3:2009)
EN 61300-3-4:2001	Part 3-4: Examinations and measurements – Attenuation (IEC 61300-3-4:2001)
EN 61300-3-6:2009	Part 3-6: Examinations and measurements – Return loss (IEC 61300-3-6:2008)
EN 61300-3-7:2001	Part 3-7: Examinations and measurements – Wavelength dependence of attenuation and return loss (IEC 61300-3-7:2000)
EN 61300-3-28:2002	Part 3-28: Examinations and measurements – Transient loss (IEC 61300-3-28:2002)
EN 61300-3-46 ¹⁾	Part 3-46: Measurement – Bore diameter for guide pin in MT ferrules

1) At draft stage.

77 **3 Description**

78 A multimode mechanical fibre splice is a passive optical interconnection component which provides optical
79 and mechanical continuity between 2 optical fibres or cables. The products described in this specification are
80 based on mechanical alignment of 2 cleaved fibres. The fibres are protected against ingress of dust or water
81 by a sealing material, generally an index matching gel, to both minimise reflections and to improve
82 attenuation at the glass/gel/glass interface.

83 Some splices may have a limited reinstallation capability. In this case the re-installability shall be clearly
84 stated and the re-installation test 9 in 8.3 shall be conducted.

85 **3.1 Mechanical splice**

86 An optical fibre mechanical splice body contains the following pre-assembled elements:

- 87 – an alignment device;
- 88 – a sealing and index matching gel inside;
- 89 – a fibre alignment activation device like a spring, wedge or plunger;
- 90 – a fibre clamping or fixing able to withstand axial fibre loads.

91 Mechanical splices designed for use with cables shall contain strain relief fixing.

92 **3.2 Materials**

93 Materials which are not specified or which are not specifically described are left to the discretion of the
94 manufacturer. However, the following requirements shall be met:

- 95 – all materials that are likely to come in contact with personnel shall meet appropriate health and safety
96 regulations;
- 97 – the sealing and index matching materials shall be compatible with the materials of the fibres and the
98 mechanical splice parts;
- 99 – all components of the splice shall be resistant to solvents and degreasing agents that are typically used
100 to clean and degrease fibres and cables;
- 101 – metallic parts shall be resistant to the corrosive influences they may encounter during the lifetime of the
102 product;
- 103 – exterior polymer materials shall be resistant to mould growth.

104 **3.3 Dimensions**

105 Outline dimensions are specified. All other dimensions are left to the discretion of the manufacturer.

106 **3.4 Colour and marking**

107 Marking of the product or packaging shall be in the following order of precedence:

- 108 a) identification of manufacturer;
- 109 b) manufacturing date code: year/week;
- 110 c) manufacturers part number;
- 111 d) variant identification number.

112 There is no preferred colour specified.

4 Variants


Table 1 – Optical fibre mechanical splice, for category U – variants

EN 50411–3–6 – XX₁ – X₂ – X₃

Variant No. XX ₁	Mechanical splice type (common profile)
M1	Mechanical splice Type 1
M2	Mechanical splice Type 2
M3	Mechanical splice Type 3
M4	Mechanical splice Type 4
M5	Mechanical splice Type 5
M6	Mechanical cable splice Type 6

Variant No. X ₂ and X ₃	Fibre types to be spliced
P	Primary coated 125/250 µm
S	Secondary coated 125/900 µm
A	Any single fibre types P or S
R	Reinforced cable

5 Dimensional requirements

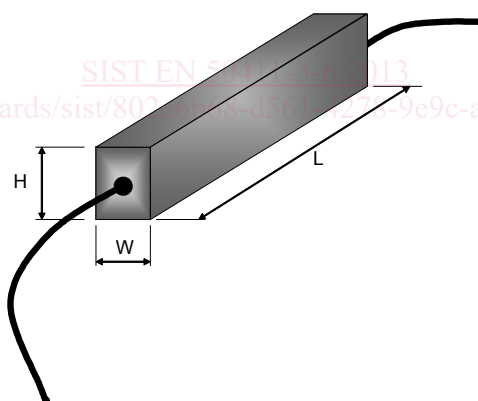

Variant	Description	Dimension W ± 0,1 mm mm	Dimension H ± 0,1 mm mm	Dimension L ± 1 mm mm
Type M1	Mechanical Type M1	3,8	6,4	38
Type M2	Mechanical Type M2	4,0	4,0	36
Type M3	Mechanical Type M3	3,2	3,2	45
Type M4	Mechanical Type M4	4,2	4,2	44
Type M5	Mechanical Type M5	4,0	4,0	40
Type M6	Mechanical Type M6	Ø 5,0		65

Figure 1 – Outline and maximum dimensions