

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Railway applications – Electromagnetic compatibility –
Part 3-1: Rolling stock – Train and complete vehicle**

**Applications ferroviaires – Compatibilité électromagnétique –
Partie 3-1: Matériel roulant – Trains et véhicules complets**

<https://standards.iteh.ai/catalog/standards/sist/c792d6a2-2af4-4587-aeb8-644cb7de37a8/iec-62236-3-1-2018>





THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2018 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms, containing 21 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Catalogue IEC - webstore.iec.ch/catalogue

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

Recherche de publications IEC - webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient 21 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.



INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Railway applications – Electromagnetic compatibility –
Part 3-1: Rolling stock – Train and complete vehicle**

**Applications ferroviaires – Compatibilité électromagnétique –
Partie 3-1: Matériel roulant – Trains et véhicules complets**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.100; 45.060.01

ISBN 978-2-8322-5308-3

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 Terms, definitions and abbreviated terms	7
3.1 Terms and definitions.....	7
3.2 Abbreviated terms.....	7
4 Applicability.....	8
5 Immunity requirements	8
6 Emission tests and limits	8
6.1 General.....	8
6.2 Interference on outside party telecommunication lines	8
6.2.1 Digital telecommunication lines.....	8
6.2.2 Analogue telecommunication lines	9
6.3 Radiated electromagnetic disturbances.....	9
6.3.1 Test site	9
6.3.2 Test conditions	9
6.3.3 Emission limits.....	11
Annex A (informative) Interference on telecommunication lines.....	13
A.1 Harmonics in the traction current	13
A.1.1 General	13
A.1.2 Relationship between currents in railway system and noise on telecommunication lines	13
A.2 Psophometric current definition.....	14
A.3 Limits and test conditions.....	14
A.4 Measurement of the psophometric current	15
A.5 Calculation of the overall psophometric current of a trainset	15
A.5.1 Current of one tractive unit	15
Annex B (normative) Radiated electromagnetic disturbances – Test procedure.....	17
B.1 Purpose	17
B.2 Measuring equipment and test method.....	17
Annex C (informative) Emission values for lower frequency range	18
Bibliography.....	20
Figure 1 – Limits for stationary test (quasi-peak, 10 m).....	11
Figure 2 – Limits for slow moving test (peak, 10 m).....	12
Figure C.1 – Emission values for stationary rolling stock.....	18
Figure C.2 – Emission values for slow moving rolling stock.....	19
Table B.1 – Guideline for test	17

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**RAILWAY APPLICATIONS –
ELECTROMAGNETIC COMPATIBILITY –****Part 3-1: Rolling stock – Train and complete vehicle**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62236-3-1 has been prepared by IEC technical committee 9: Electrical equipment and systems for railways.

This third edition cancels and replaces the second edition published in 2008. It constitutes a technical revision and has been developed on the basis of EN 50121-3-1:2015.

This edition includes the following significant technical changes with respect to the previous edition:

- a) clarification of scope (Clause 1);
- b) clarification of definitions (Clause 3);
- c) clarification of applicability (Clause 4);
- d) clarification of interference on outside party telecommunication lines (6.2), psophometric current (Annex A);

- e) moving emission values for radiated H-field in the frequency range 9 kHz to 150 kHz into new Annex C due to the fact that:
- there are very few outside world victims (e.g. radio services),
 - the radiated emission measured at 10 m is not representative of the compatibility with internal railway apparatus,
 - the EMC with other railway apparatus in this frequency range is covered in other procedures and standards like IEC 62427 series,
 - there is low reproducibility.

This International Standard is to be read in conjunction with IEC 62236-1.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
9/2337/FDIS	9/2367/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62236 series, published under the general title *Railway applications – Electromagnetic compatibility*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

<https://standards.iteh.ai/catalog/standards/sist/e752d8a2-2aa4-4587-aeb8-644cb7de37a8/iec-62236-3-1-2018>

INTRODUCTION

High powered electronic equipment, together with low power microcontrollers and other electronic devices, is being installed on trains in great numbers. Electromagnetic compatibility has therefore become a critical issue for the design of train-related apparatus as well as of the train as a whole.

This Product Standard for rolling stock sets limits for electromagnetic emission and immunity in order to ensure a well functioning system within its intended environment.

Immunity limits are not given for the complete vehicle. Part 3-2 of this series defines requirements for the apparatus installed in the rolling stock, since it is impractical to test the complete unit. An EMC plan includes equipment covered by this document.

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

[IEC 62236-3-1:2018](https://standards.iteh.ai/catalog/standards/sist/e752d8a2-2aa4-4587-aeb8-644cb7de37a8/iec-62236-3-1-2018)

<https://standards.iteh.ai/catalog/standards/sist/e752d8a2-2aa4-4587-aeb8-644cb7de37a8/iec-62236-3-1-2018>

RAILWAY APPLICATIONS – ELECTROMAGNETIC COMPATIBILITY –

Part 3-1: Rolling stock – Train and complete vehicle

1 Scope

This part of IEC 62236 specifies the emission and immunity requirements for all types of rolling stock. It covers traction stock, hauled stock and trainsets including urban vehicles for use in city streets. This document specifies the emission limits of the rolling stock to the outside world.

The scope of this document ends at the interface of the rolling stock with its respective energy inputs and outputs. In the case of traction units, trainsets, trams, etc., this is the current collector (pantograph, shoe gear). In the case of hauled stock, this is the AC or DC auxiliary power connector. However, since the current collector is part of the traction stock, it is not entirely possible to exclude the effects of this interface with the power supply line. The slow moving test has been designed to minimize these effects.

There may be additional compatibility requirements within the railway system identified in the EMC plan (e.g. as specified in IEC 62427).

Electromagnetic emissions of the railway system as a whole are dealt with in IEC 62236-2.

These specific provisions are used in conjunction with the general provisions in IEC 62236-1.

The frequency range considered is from 0 Hz (DC) to 400 GHz. No measurements need to be performed at frequencies where no requirement is specified.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62236-1:2018, *Railway applications – Electromagnetic compatibility – Part 1: General*

IEC 62236-2:2018, *Railway applications – Electromagnetic compatibility – Part 2: Emission of the whole railway system to the outside world*

IEC 62236-3-2:2018, *Railway applications – Electromagnetic compatibility – Part 3-2: Rolling stock – Apparatus*

CISPR 16-1-1:2015, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-1: Radio disturbance and immunity measuring apparatus – Measuring apparatus*

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1.1

traction stock

electric and diesel traction unit, high speed trainset, elementary fixed combination of traction stock and hauled stock, electric and diesel multiple unit (no traction unit, distributed traction equipment), Light Railway Vehicle (LRV), such as tram, trolley bus or any other electrical vehicle for urban mass transit, underground trainset

3.1.2

hauled stock

independent passenger coaches and freight wagons (if they contain electric apparatus such as freezing equipment) which may be hauled in random combinations by different types of traction units

iTeh STANDARD PREVIEW
(standards.iteh.ai)

3.1.3

main line vehicles

vehicles such as high speed trains, suburban trains, freight trains, mainly designed to operate between cities

[IEC 62236-3-1:2018](#)

[https://standards.iteh.ai/catalog/standards/sist/e752d8a2-2aa4-4587-aeb8-](https://standards.iteh.ai/catalog/standards/sist/e752d8a2-2aa4-4587-aeb8-644cb7de37a8/iec-62236-3-1-2018)

[644cb7de37a8/iec-62236-3-1-2018](#)

3.1.4

urban vehicles

vehicles such as underground trainsets, trams, LRV (Light Rail Vehicles), trolleybuses, mainly designed to operate within the boundary of a city

3.2 Abbreviated terms

AC	Alternating current
BW	Band width
DC	Direct current
E	Electric (field)
EMC	Electromagnetic compatibility
EUT	Equipment under test
H	Magnetic (field)
ISDN	Integrated Services Digital Network
ITU-T	International Telecommunication Union – Telecommunication Standardization Sector
LRV	Light rail vehicle
PCM	Pulse – code modulation
QC	Quadrant converters
QP	Quasi-Peak
xDSL	All types of digital subscriber lines

4 Applicability

Generally, it is not possible to test electromagnetic compatibility invoking every function of the stock. The tests shall be made at typical operating modes considered to produce the largest emission.

The typical operating mode shall require all systems to be energised which are normally in continuous operation during service. It is not necessary during the test to exercise systems which operate transiently such as for example operation of internal doors, although they should be energised. It is not necessary to test degraded modes of operation.

The configuration and mode of operation shall be specified in the test plan and the actual conditions during the tests shall be precisely noted in the test report.

5 Immunity requirements

No tests are applied to the complete vehicle. It is expected that the assembly of the apparatus into a complete vehicle will give adequate immunity, provided that an EMC plan has been prepared and implemented, taking into account the requirements in IEC 62236-3-2.

In exceptional cases, where apparatus meets another EMC Standard, but full compliance with IEC 62236-3-2 is not demonstrated, EMC shall be ensured by adequate integration measures of the apparatus into the vehicle system and/or by an appropriate EMC analysis and test which justifies deviating from IEC 62236-3-2.

(standards.iteh.ai)

6 Emission tests and limits

[IEC 62236-3-1:2018](https://standards.iteh.ai/catalog/standards/sist/e752d8a2-2aa4-4587-aeb8-644cb7de37a8/iec-62236-3-1-2018)

6.1 General <https://standards.iteh.ai/catalog/standards/sist/e752d8a2-2aa4-4587-aeb8-644cb7de37a8/iec-62236-3-1-2018>

The emission tests and limits for rolling stock in this document should ensure as far as possible that the rolling stock does not interfere with typical installations in the vicinity of the railway system.

Measurements shall be performed in well-defined and reproducible conditions. It is not possible to totally separate the effects of the railway system and the stock under test. For radiated emissions, the test conditions are defined in 6.3.1 and 6.3.2.

NOTE 1 Signalling and communication, train radio and other railway systems (axle counters, track circuits, train control systems, etc.) are different in every country in terms of operating frequencies and waveforms. Therefore, compatibility requirements are specified according to the type of signalling and communication systems used.

NOTE 2 There can be cases in which radio or other railway external services with working frequencies below 150 kHz are in operation close to the railway. The EMC plan covers these cases and an adequate level of emission from railway on these working frequencies may be found in the values given in informative Annex C, hence no guarantee can be given for an undisturbed operation.

6.2 Interference on outside party telecommunication lines

6.2.1 Digital telecommunication lines

Interference with digital systems such as PCM, ISDN, xDSL is not covered in this document.

It should be noted that these systems operate in a higher frequency range using multiple carriers and various automatic error correction protocols.

It is considered unlikely that rolling stock can produce sufficient interference in this frequency range.

6.2.2 Analogue telecommunication lines

No harmonized limits apply.

Information about interference on telecommunication lines can be found in Annex A.

6.3 Radiated electromagnetic disturbances

6.3.1 Test site

It can be assumed that measurements will not take place in laboratory conditions. Trees, walls, bridges, tunnels or other conductive objects in the vicinity of the measurement antenna could have an impact on the measurement. Other railway vehicles operating in the same feeding section or nearby the measuring point may affect the measurement result. Overhead/third rail discontinuities as well as substations, power lines, buried lines, transformers, neutral sections, section insulators, etc., close to the measuring point may cause additional variations.

These influences shall be reduced as far as practical but in any case no obstacles above rail level which may influence the measurements shall be located between antenna and EUT.

The overhead/third rail should be a continuous line as far as practical on both sides of the measurement point (typically at least 200 m).

Since it is impossible to avoid the support masts of the overhead, the measurement point shall be at the midpoint between masts, on the opposite side of the track (in case of a double track, on the side of the track which is being used). If the railway system is powered by a third rail, the antenna shall be on the same side of the track (worst case).

Since resonances may occur in the overhead line at radio-frequencies, it may be necessary to change the test site. The exact location of the test site and features of both the site and the overhead system layout shall be noted.

The contribution of the substation may be considered when assessing the emissions from the vehicle. Note that the contribution of a DC substation depends on its load current and will not be measured properly in a no-load condition.

At the beginning and at the end of the test series the ambient noise shall be recorded. This measurement shall be done without any influence of the vehicle.

If at specific frequencies or in specific frequency ranges the ambient noise is higher than the limit values less 6 dB (ambient noise > (limit – 6 dB)), the measurements at these frequencies need not be considered. These frequencies shall be noted in the test report.

NOTE It is helpful to perform this ambient noise measurement also with the vehicle completely powered down in front of the antenna.

6.3.2 Test conditions

The tests shall cover the operation of all systems onboard the rolling stock which may produce radiated emissions.

Hauled stock (a representative version) shall be tested while stationary in an energised mode (auxiliary converters, battery chargers, etc., in operation). The antenna should be sited opposite the equipment expected to produce the greatest emissions at the frequencies under measurement.

Tests for identical coaches or wagons are performed only once.

Traction stock shall be tested while stationary and at slow moving speed. During the stationary test, the auxiliary converters shall operate (it is not inevitably under maximum load conditions that the maximum emission level is produced) and the traction converters shall be under voltage but not operating. The antenna shall be in front of the middle of each vehicle unless an alternative location is expected to produce higher emission levels.

For the slow moving test, the speed shall be low enough to avoid arcing at or bouncing of the sliding contact and high enough to allow for electric braking. The recommended speed range is (20 ± 5) km/h for urban vehicles and (50 ± 10) km/h for main line vehicles. When passing the antenna, the vehicle shall accelerate or decelerate with approximately 1/3 of its maximum tractive effort within the given speed range.

The slow moving test may be replaced by a stationary test with the vehicle operating at 1/3 of its maximum tractive effort against the mechanical brakes, if the following conditions are fulfilled:

- the traction equipment can be operated while the vehicle is stationary;
- tests of electric braking are not required, if no different circuits are used in braking.

If the slow moving test is replaced by a stationary test with tractive effort, then the slow moving limits apply.

Any vehicles using onboard energy storage for traction shall use the test procedure and limits for slow moving test for the charging process.

NOTE Slow moving test procedure and limits are used for charging process (for traction energy storing devices) because it has a short duration with high energy transfer.

6.3.3 Emission limits

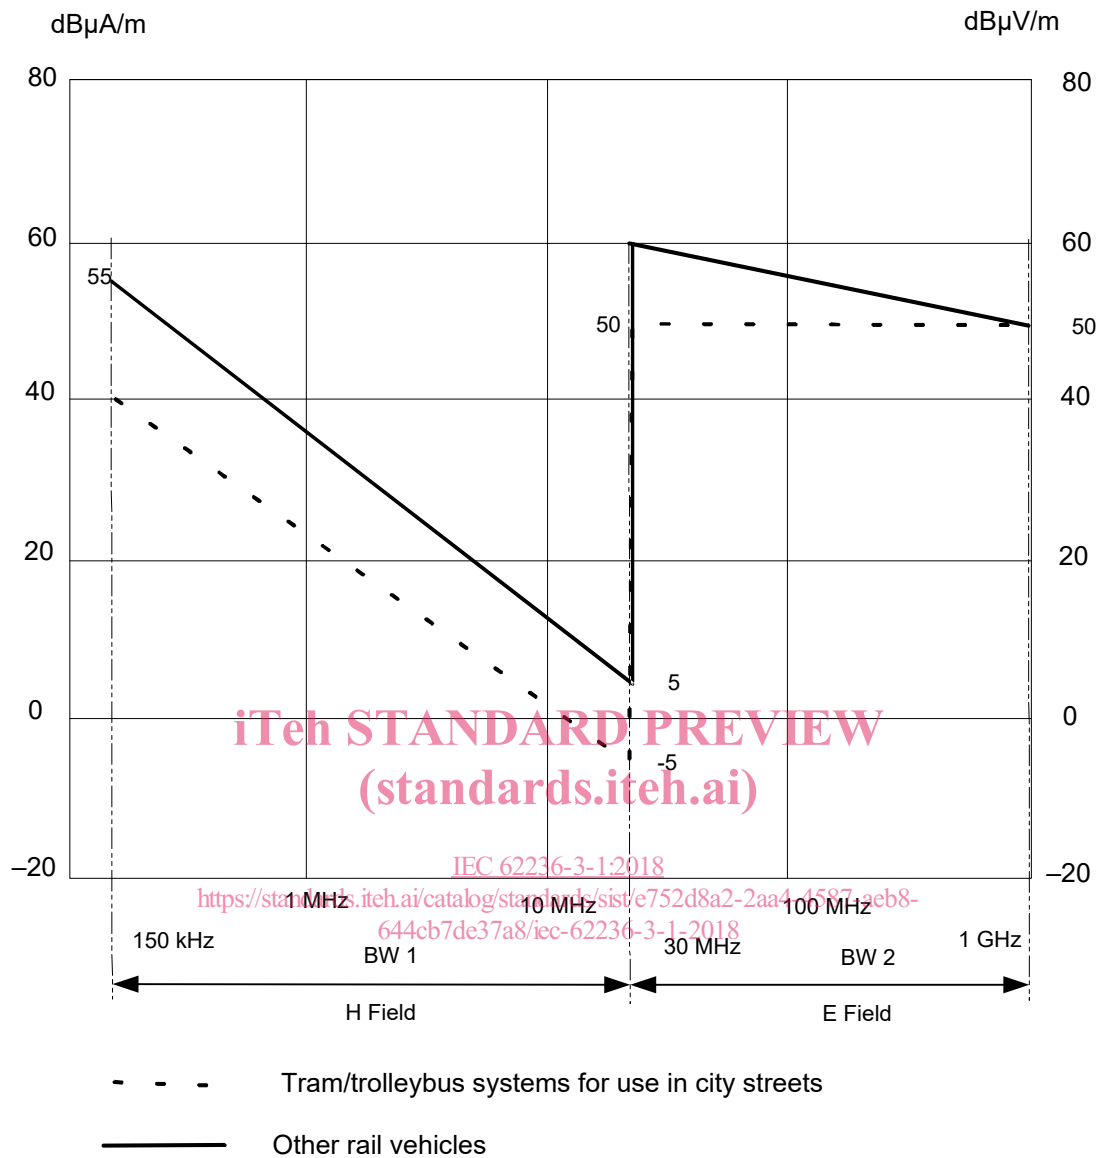


Figure 1 – Limits for stationary test (quasi-peak, 10 m)

The limits are defined as quasi-peak values and the bandwidths are those used in CISPR 16-1-1:

	Bandwidth
Frequencies from 150 kHz to 30 MHz	9 kHz (BW 1)
Frequencies from 30 MHz to 1 GHz	120 kHz (BW 2)

All values are measured at a distance of 10 m from the centre of the track.

The emission limits are specified up to 1 GHz due to the fact that there are no significant sources of interference above 1 GHz and that emissions from microprocessor controlled equipment which may give rise to emissions at frequencies greater than 1 GHz are addressed by compliance with IEC 62236-3-2.