

Edition 1.0 2018-05

INTERNATIONAL **STANDARD**

NORME INTERNATIONALE



Optical fibre cables Feh STANDARD PREVIEW

Part 1-31: Generic specification – Optical cable elements – Optical fibre ribbon (standards.iteh.ai)

Câbles à fibres optiques -

Partie 1-31: Spécification générique — Eléments de câbles optiques — Rubans de

fibres optiques 966ec25bf7ef/jec-60794-1-31-2018





THIS PUBLICATION IS COPYRIGHT PROTECTED Copyright © 2018 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office Tel.: +41 22 919 02 11

3, rue de Varembé info@iec.ch CH-1211 Geneva 20 www.iec.ch

Switzerland About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and 4 | 67 | 000 | electrotechnical terminology entries in English and once a month by email. https://standards.iteh.ai/catalog/standar

IEC Customer Service Centre - webstore.iec.ch/csc/f/ec/ec-6 If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online. 21

IEC Glossary - std.iec.ch/glossary

French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.



Edition 1.0 2018-05

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Optical fibre cables - eh STANDARD PREVIEW

Part 1-31: Generic specification – Optical cable elements – Optical fibre ribbon

Câbles à fibres optiques - IEC 60794-1-31:2018

Partie 1-31: Spécification générique à Éléments de câbles optiques – Rubans de fibres optiques 966ec25bf7ef/iec-60794-1-31-2018

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMISSION ELECTROTECHNIQUE INTERNATIONALE

ICS 33.180.10; 33.180.99 ISBN 978-2-8322-6564-2

Warning! Make sure that you obtained this publication from an authorized distributor.

Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

FO	REWO	RD	3		
1	Scop	e	5		
2	Norm	ative references	5		
3	Term	s, definitions, symbols and abbreviated terms	5		
4	Requirements				
	4.1	General	6		
	4.2	Construction	6		
4.2.1		Ribbon structure	6		
	4.2.2	Optical fibres	7		
	4.3	Dimensions	7		
	4.4	Mechanical requirements			
	4.4.1	General			
	4.4.2	Separability of individual fibres from a ribbon			
	4.4.3	Ribbon stripping			
	4.4.4	Torsion			
	4.5	Identification of ribbon			
	4.5.1	General Identification by positional identification REVIEW	10		
	4.5.2				
	4.5.3	Identification by ribbon coding and fibre colouring	11		
Fig	ure 1 –	Cross-section of a typical edge-bonded ribbon (thinner ribbon)	6		
Fig	ure 2 -	Cross-section of a typical encapsulated ribbon (thicker fibbon)?	7		
Fig	ure 3 –	Overview of a typical partially-bonded ribbon	7		
Fig (4-	ure 4 – fibre rik	Example of cross-sectional drawing illustrating fibre ribbon geometry	9		
Fig	ure 5 –	Example of identification by means of colour coding and positioning	11		
Tal	ole 1 –	Maximum dimensions of optical fibre ribbons for a typical 250 μm coating fibre	8		

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL FIBRE CABLES -

Part 1-31: Generic specification – Optical cable elements – Optical fibre ribbon

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications
- 4) In order to promote international uniformity, IEC National Committee's undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.

 https://standards.itch.ai/catalog/standards/sist/b610bfcf-1c6e-45b3-8739-
- 5) IEC itself does not provide any attestation of conformity and pendent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60794-1-31 has been prepared by subcommittee SC86A: Fibres and cables, of IEC technical committee 86: Fibre optics.

This bilingual version (2019-02) corresponds to the monolingual English version, published in 2018-05.

The text of this International Standard is based on the following documents:

CDV	Report on voting
86A/1806/CDV	86A/1840/RVC

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 60794 series, published under the general title *Optical fibre cables*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>IEC 60794-1-31:2018</u> https://standards.iteh.ai/catalog/standards/sist/b610bfcf-1c6e-45b3-8739-966ec25bf7ef/iec-60794-1-31-2018

OPTICAL FIBRE CABLES -

Part 1-31: Generic specification – Optical cable elements – Optical fibre ribbon

1 Scope

This part of IEC 60794, which is a generic specification, covers optical fibre ribbons. Requirements which are described in this part apply to optical fibre ribbon cables for use with telecommunication equipment and devices employing similar techniques, in particular optical fibre cables in IEC 60794-2 for indoor use and in IEC 60794-3 for outdoor use. Detailed specifications for each application are given in IEC 60794-2 and IEC 60794-3.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

iTeh STANDARD PREVIEW
IEC 60304, Standard colours for insulation for low-frequency cables and wires

(standards.iteh.ai)

IEC 60793-2-10, Optical fibres – Part 2-10: Product specifications – Sectional specification for category A1 multimode fibres IEC 60794-1-31:2018

https://standards.iteh.ai/catalog/standards/sist/b610bfcf-1c6e-45b3-8739-

IEC 60793-2-50, Optical fibres – **Part 2-50: Recoduct specifications** – Sectional specification for class B single-mode fibres

IEC 60794-1-1, Optical fibre cables – Part 1-1: Generic specification – General

IEC 60794-1-23, Optical fibre cables – Part 1-23: Generic specification – Basic optical cable test procedures – Cable element test methods

IEC 60794-2, Optical fibre cables – Part 2: Indoor cables – Sectional specification

IEC 60794-3, Optical fibre cables – Part 3: Outdoor cables – Sectional specification

3 Terms, definitions, symbols and abbreviated terms

For the purposes of this document, the terms, definitions, symbols and abbreviated terms given in IEC 60794-1-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

4 Requirements

4.1 General

Optical fibre ribbons are optical fibres which can be assembled in a composite linear array.

Fibres shall be arranged in parallel and formed into ribbons of typically four, six, eight, twelve, sixteen, twenty-four or thirty-six fibres each according to user requirements, and shall be capable of mass splicing.

Some parameters shall be measured in the ribbon since the corresponding tests on the primary coated fibre or finished cable are not sufficient for complete characterization. These parameters are identified below.

4.2 Construction

4.2.1 Ribbon structure

Ribbon structures are typically designated as edge-bonded, encapsulated or partially-bonded. Edge-bonded and encapsulated structures are differentiated by the amount of buffering afforded to the fibres by the bonding agent. The partially-bonded ribbon may be of either structure but with the buffer applied periodically.

Figure 1 illustrates the edge-bonded structure in which the bonding agent is applied predominantly between the fibres. Figure 2 illustrates the encapsulated structure in which the bonding agent extends well beyond the extreme surface of any fibre. Figure 3 illustrates the partially-bonded structure in which neighbouring fibres are fixed together periodically in the longitudinal direction.

IEC 60794-1-31:2018

The edge-bonded hand/stencapsulated ribbons dare predominantly rigid in the transverse direction. The partially-bonded structure enables the optical fibre ribbon to be rolled up easily and accommodated very tightly in cables.




Figure 1 – Cross-section of a typical edge-bonded ribbon (thinner ribbon)





Figure 2 – Cross-section of a typical encapsulated ribbon (thicker ribbon)

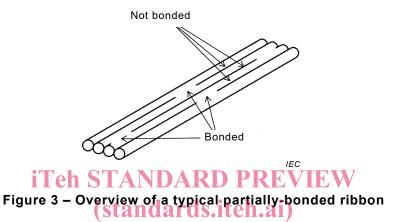

4.2.2 Optical fibres

IEC 60794-1-31:2018

Category A1 multimode/fibres/which/meet/the/requirements/of/IEC 60793-2-10 or Category B single-mode optical fibres which/meet/the/requirements/of IEC 60793-2-50 shall be used. Diameter over the fibre coating is typically 250 μ m. Other fibres may be used to construct ribbons meeting the intent of this specification.

NOTE Dimensions for ribbons with fibre coatings other than the typical 250 μ m can be established between the customer and supplier. There exist alternative coating diameters (such as 200 μ m) which can be used and require additional considerations with respect to connectivity and tools.

4.3 Dimensions

Unless otherwise specified in the detail specification, the maximum dimensions and the structural geometry of optical fibre ribbons shall be as shown in Table 1. The definitions of each dimension are defined in IEC 60794-1-23 and illustrated in Figure 4.

Table 1 – Maximum dimensions of optical fibre ribbons for a typical 250 µm coating fibre


Number	Width	Height		
of fibres ^a			Extreme fibres	Planarity
	w	h	b	p
	μm	μm	μm	μ m
4	1 220	360	786	50
6	1 648	360	1 310	50
8	2 300°	380	1 834	50
12	3 400	380	2 882	75
16	4 400	380	Per 8-fibre unit ^b	Per 8-fibre unit ^b
24	6 500	380	Per 12-fibre unit ^b	Per 12-fibre unit ^b
32 ^d	4 400	ffs ^e	Per 8-fibre unit ^b	Per 8-fibre unit ^b
36	9 800	380	Per 12-fibre unit ^b	Per 12-fibre unit ^b

If the ribbon has flexibility, for example in the case of having a partially-bonded configuration, the dimensions of the ribbon should be measured under the condition of which tested ribbon is aligned to be a coplanar. The example of a typical partially-bonded ribbon is illustrated in Figure 3.

- Dimensions for other ribbons with fibre counts not listed above should be established between the customer and supplier.
- b Per unit values are measured with the ribbon separated into the intended/sub-units/.
- ^c Maximum width shall be 2 300 in case the 8-fibre ribbon can be separated into two four-fibre sub-units.
- d A thirty-two-fibre ribbon consists of two layers of sixteen-fibre ribbons.
- e ffs= for further specification.

IEC 60794-1-31:2018

https://standards.iteh.ai/catalog/standards/sist/b610bfcf-1c6e-45b3-8739-966ec25bf7ef/iec-60794-1-31-2018

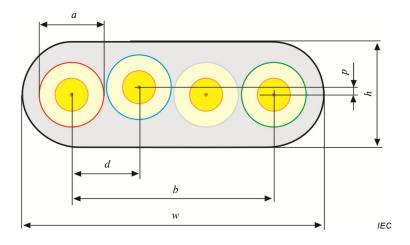

Key

- a diameter of a coloured fibre
- w width of that area
- h height of that area
- d distance between adjacent fibres
- b distance between the extreme fibres
- p planarity of the ribbon which is defined as the sum of the absolute values of the maximum positive and maximum negative vertical separation from the basis line property.

Considering the precision of fibre geometric attributes and the relatively larger precision of ribbon geometry requirements, it is acceptable for glass core/glass cladding fibres to use the edge of the cladding for the measurements according to Table 1, and as illustrated in Figure 4, in lieu of the fibre centres. In this case, the measurements shall be made on the same side of all fibres (e.g. top or bottom, left or right side). This is consistent with IEC 60794-1-23, method G2.

NOTE The maximum dimensions and the structural geometry of optical fibre ribbons for a typical 200 μ m coating fibre are currently under study.

Figure 4 – Example of cross-sectional drawing illustrating fibre ribbon geometry (4-fibre ribbon)

More stringent requirements may be agreed between the customer and supplier, as needed, depending on the splice or the connector technique employed.

The dimensions and structural geometry can be verified with a type test, described as the visual measurement method (IEC 60794-1-23, method G2), to establish and assure proper control of the ribbon manufacturing process. Once the process is established, and in order to ensure functional performance, the width and height of the ribbons may be controlled and verified, for final inspection purposes, with an aperture gauge (IEC 60794-1-23, method G3) or by the visual measurement method.

4.4 Mechanical requirements

4.4.1 General

Detailed specifications of an optical fibre ribbon shall be verified by application, such as indoor and outdoor use, which are described in the sectional specifications documents for optical cables. Optical fibre ribbon shall satisfy specifications and be tested as indicated below.

4.4.2 Separability of individual fibres from a ribbon

Fibre breakout capability at some level is generally required. Some ribbons of any type may be intended to be separated into predefined units. Specific requirements for breakout and separability shall be as specified in the detail specifications.