

INTERNATIONAL
STANDARDIZED
PROFILE

ISO/IEC
ISP
10612-3

First edition
1995-06-15

**Information technology — International
Standardized Profile RD — Relaying the
MAC service using transparent bridging —
Part 3:
(Token Ring LANs)**

media-dependent requirements

[ISO/IEC ISP 10612-3:1995](https://standards.iso.org/iso-iec-isp-10612-3:1995)

<https://standards.iteh.ai/catalog/standards/sist/905d51b6-ed63-4d85-8cdb-b65e0a2cad21/iso-iec-isp-10612-3-1995>

*Technologies de l'information — Profil normalisé international RD —
Transmission du service MAC utilisant un pontage transparent —*

*Partie 3: Prescriptions dépendantes du sous-réseau du RLE en anneau à
jeton, dépendantes des supports*



Reference number
ISO/IEC ISP 10612-3:1995(E)

ISO/IEC ISP 10612-3:1995(E)

Contents	Page
Foreword	iii
Introduction	v
1 Scope	1
2 Normative references	1
3 Definitions	2
4 Abbreviations	2
5 Requirements	2
5.1 General requirements	2
5.2 Requirements for MAC address mapping	2
Annex A: ISPICS requirements list (normative)	5
A.1 Introduction	5
A.2 Notation and conventions	5
A.3 IPRL for ISO/IEC 10038	5
A.4 IPRL for ISO/IEC 8802-5	6
Annex B: Additional references (informative)	7
B.1 Introduction	7
B.2 Informative references	7

© ISO/IEC 1995

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office · Case postale 56 · CH-1211 Genève · Switzerland

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. In addition to developing International Standards, ISO/IEC JTC 1 has created a Special Group on Functional Standardization for the processing of International Standardized Profiles.

An International Standardized Profile is an internationally agreed, harmonized document which identifies a standard or group of standards, together with options and parameters, necessary to accomplish a function or a set of functions.

Draft International Standardized Profiles are circulated to national bodies for voting. Publication as an International Standardized Profile requires approval by at least 75 % of the national bodies casting a vote.

<https://standards.iteh.ai/catalog/standards/sist/905d51b6-ed63-4d85-8cdb->

International Standardized Profile ISO/IEC ISP 10612-3 was prepared with the collaboration of

- Asia-Oceania Workshop (AOW);
- European Workshop for Open Systems (EWOS);
- Open Systems Environment Implementors' Workshop (OIW).

ISO/IEC ISP 10612 consists of several parts, under the general title *Information technology - International Standardized Profile RD - Relaying the MAC service using transparent bridging*:

- *Part 1: Subnetwork-independent requirements*
- *Part 2: CSMA/CD LAN subnetwork-dependent, media-dependent requirements*
- *Part 3: Token Ring LAN subnetwork-dependent, media-dependent requirements*
- *Part 4: Profile RD51.51 (CSMA/CD LAN - CSMA/CD LAN)*

- *Part 5: Profile RD51.54 (CSMA/CD LAN - FDDI LAN)*
- *Part 6: Profile RD54.54 (FDDI LAN - FDDI LAN)*
- *Part 7: Profile RD51.53 (CSMA/CD LAN - Token Ring LAN)*
- *Part 8: Profile RD53.53 (Token Ring LAN - Token Ring LAN)*
- *Part 9: Profile RD53.54 (Token Ring LAN - FDDI LAN)*

Annex A forms an integral part of this part of ISO/IEC ISP 10612. Annex B is for information only.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/IEC ISP 10612-3:1995

<https://standards.iteh.ai/catalog/standards/sist/905d51b6-ed63-4d85-8cdb-b65e0a2cad21/iso-iec-isp-10612-3-1995>

Introduction

ISO/IEC ISP 10612 is defined in accordance with the principles specified by ISO/IEC TR 10000. The context of Functional Standardization is one area in the overall field of Information Technology (IT) standardization activities, covering base standards, profiles, and registration mechanisms. A profile defines a combination of base standards that collectively perform a specific well-defined IT function. Profiles standardize the use of options and other variations in the base standards, and provide a basis for the development of uniform, internationally recognized system tests.

ISPs are produced not simply to 'legitimize' a particular choice of base standards and options, but to promote real system interoperability. One of the most important roles for an ISP is to serve as the basis for the development (by organizations other than ISO and IEC) of internationally recognized test methods. The development and widespread acceptance of tests based on this and other ISPs is crucial to the successful realization of this goal.

ISO/IEC ISP 10612 consists of several parts, of which this is part 3. ISO/IEC ISP 10612-1 specifies the profile requirements which are independent of the subnetwork and media. There are further parts which specify subnetwork-dependent and media-dependent requirements. In addition, for each individual profile, there is a part of ISO/IEC ISP 10612 which identifies the specific requirements of that profile, making reference to appropriate material from part 1 and from the subnetwork-dependent parts.

<https://standards.iteh.ai/catalog/standards/sist/905d51b6-ed63-4d85-8cdb-b65e0a2cad21/iso-iec-isp-10612-3-1995>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

This page is intentionally left blank

<https://standards.iteh.ai/catalog/standards/sist/905d51b6-ed63-4d85-8cdb-b65e0a2cad21/iso-iec-isp-10612-3-1995>

Information technology — International Standardized Profile RD — Relaying the MAC service using transparent bridging —

Part 3:

Token Ring LAN subnetwork-dependent, media-dependent requirements

1 Scope

ISO/IEC ISP 10612 is applicable to interworking units concerned with operating in the Open Systems Interconnection (OSI) Local Area Network environment. It specifies a combination of OSI standards that collectively provide a MAC relay function.

This part of ISO/IEC ISP 10612 specifies requirements that are dependent on the type of subnetwork. It is applicable to an interworking unit which is attached to an ISO/IEC 8802-5 Token Ring LAN subnetwork and is relaying to another LAN subnetwork, not necessarily of the same type.

[ISO/IEC ISP 10612-3:1995](https://standards.iteh.ai/catalog/standards/sist/905d51b6-ed63-4d85-8cdb-b65e0a2cad21/iso-iec-isp-10612-3-1995)

<https://standards.iteh.ai/catalog/standards/sist/905d51b6-ed63-4d85-8cdb-b65e0a2cad21/iso-iec-isp-10612-3-1995>

2 Normative references

The following documents contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC ISP 10612. At the time of publication, the editions indicated were valid. All documents are subject to revision and parties to agreements based on this part of ISO/IEC ISP 10612 are warned against automatically applying any more recent editions of the documents listed below, since the nature of references made by ISPs to such documents is that they may be specific to a particular edition. Members of IEC and ISO maintain registers of currently valid International Standards and ISPs, and ITU-T maintains published editions of its current Recommendations.

ISO/IEC 8802-5:1992, *Information technology - Local and metropolitan area networks - Part 5: Token ring access method and physical layer specifications.*

ISO/IEC TR 10000-1:1992, *Information technology - Framework and taxonomy of International Standardized Profiles - Part 1: Framework.*

ISO/IEC TR 10000-2:1994, *Information technology - Framework and taxonomy of International Standardized Profiles - Part 2: Principles and Taxonomy for OSI Profiles.*

ISO/IEC 10038:1993, *Information technology - Telecommunications and information exchange between systems - Local area networks - Media access control (MAC) bridges.*

ISO/IEC ISP 10608-13:1994, *Information technology - International Standardized Profile TAnnnn - Connection-mode Transport Service over Connectionless-mode Network Service - Part 13: MAC sublayer and physical layer dependent requirements for a Token Ring LAN subnetwork.*

ISO/IEC ISP 10612-1:1995, *Information technology - International Standardized Profile RD - Relaying the MAC service using transparent bridging - Part 1: Subnetwork-independent requirements.*

ISO/IEC TR 10735:1993, *Information technology - Telecommunications and information exchange between systems - Standard Group MAC Addresses.*

3 Definitions

All the terms used in this part of ISO/IEC ISP 10612 are defined in the documents that are referenced in clause 2.

4 Abbreviations

Abbreviations, including acronyms, are used in this part of ISO/IEC ISP 10612 as defined in the documents that are referenced in clause 2. In addition, the following abbreviations are used:

FA: Token Ring LAN Functional Address

GA: Group MAC Address

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC ISP 10612-3:1995](https://standards.iteh.ai/catalog/standards/sist/905d51b6-ed63-4d85-8cdb-b65e0a2cad21/iso-iec-isp-10612-3-1995)

<https://standards.iteh.ai/catalog/standards/sist/905d51b6-ed63-4d85-8cdb-b65e0a2cad21/iso-iec-isp-10612-3-1995>

5 Requirements


5.1 General requirements

An implementation conforming to this part of ISO/IEC ISP 10612 shall meet all static and dynamic requirements for Token Ring LAN subnetworks which are specified in ISO/IEC ISP 10608-13.

The destination MAC address to be used for BPDUs shall be as defined in ISO/IEC 10038, table 3-5.

5.2 Requirements for MAC address mapping

In addition to the general requirements that are stated in 5.1 above, an implementation conforming to this part of ISO/IEC ISP 10612 shall contain a GA-FA address mapping function as illustrated architecturally by figure 1.

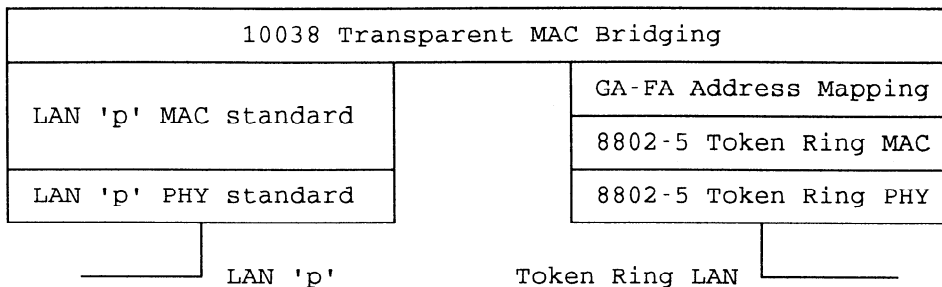

Note - LAN 'p' denotes an CSMA/CD, Token Bus, Token Ring, or FDDI LAN

Figure 1 - Model of multicast MAC address mapping in an RD5p.53 MAC bridge

The GA-FA address mapping function shall convert between Functional Addresses (FAs) used as multicast MAC destination addresses on Token Ring LANs and the corresponding Group MAC Addresses (GAs) defined in ISO/IEC TR 10735. The GA-FA address mapping shall be applied only for the MAC addresses shown in table 1 and only in conjunction with the LLC DSAP value shown in table 1. All other destination MAC addresses are passed unchanged. Also, the MAC addresses below shall be passed unchanged when they appear in conjunction with DSAP values other than those listed in the table.

(standards.iteh.ai)

Table 1 - GA-FA address mapping

<https://standards.iteh.ai/catalog/standards/sist/905d51b6-ed63-4d85-8cdb-b65e0a2cad21/iso-iec-isp-10612-3-1995>

Group MAC Address (GA)	Functional Address (FA)	DSAP	Use
09-00-2B-00-00-04	03-00-00-00-02-00	FE	ISO 9542 All ESs
09-00-2B-00-00-05	03-00-00-00-01-00	FE	ISO 9542 All ISs
01-80-C2-00-00-11	03-00-00-00-40-00	02	ISO/IEC 15802-4 Load Server
01-80-C2-00-00-12	03-00-00-00-20-00	02	ISO/IEC 15802-4 Loadable Device
01-80-C2-00-00-16	03-00-00-00-10-00	FE	ISO/IEC 10030 All CONS ES
01-80-C2-00-00-17	03-00-00-00-08-00	FE	ISO/IEC 10030 All CONS SNAREs
01-80-C2-00-00-18	03-00-00-00-04-00	02	ISO/IEC 15802-2 Manager Stations
01-80-C2-00-00-1A	03-00-00-40-00-00	02	ISO/IEC 15802-2 Agent Stations

When a frame is received by the MAC relay from a Token Ring LAN, and the destination MAC address and DSAP value is one of above FA-DSAP pairs, the GA-FA mapping function shall change the FA to the corresponding GA before the frame is passed to the bridge function. The DSAP value shall not be changed.

When a frame is passed from the bridge function to the Token Ring port, and the destination MAC address and DSAP value is one of above GA-DSAP pairs, the GA-FA mapping function shall change the GA to the corresponding FA before the frame is forwarded on the Token Ring LAN. The DSAP value shall not be changed.