INTERNATIONAL STANDARD

ISO 12466-2

First edition 1999-10-15

Plywood — Bonding quality —

Part 2: **Requirements**

Contreplaqué — Qualité de collage —

iTeh S^{Partie 2: Exigences}D PREVIEW (standards.iteh.ai)



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 12466-2:1999 https://standards.iteh.ai/catalog/standards/sist/ac472741-7bdb-4c55-89e8d93b47e15444/iso-12466-2-1999

© ISO 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 734 10 79
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 12466 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 12466-2 was prepared by Technical Committee ISO/TC 89, *Wood-based panels*, Subcommittee SC 3, *Plywood*.

ISO 12466 consists of the following parts, under the general title Plywood — Bonding quality:

— Part 1: Test methods

(standards.iteh.ai)

— Part 2: Requirements

ISO 12466-2:1999 https://standards.iteh.ai/catalog/standards/sist/ac472741-7bdb-4c55-89e8d93b47e15444/iso-12466-2-1999

© ISO 1999 – All rights reserved

iTeh STANDARD PREVIEW (standards.iteh.ai)

Plywood — Bonding quality —

Part 2:

Requirements

1 Scope

This part of ISO 12466 specifies requirements for determination of bonding classes of veneer plywood according to their intended end uses.

The appropriate test methods are specified in ISO 12466-1.

2 Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this part of ISO 12466. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 12466 are encouraged to investigate the possibility of applying the most recent edition of the normative document indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

https://standards.iteh.ai/catalog/standards/sist/ac472741-7bdb-4c55-89e8-

ISO 12466-1, Plywood — Bonding quality 1931 Part 17:4 Test methods. 1999

3 Bonding classes

Bonding quality is categorized into three classes, in accordance with ISO 12465-1, ISO 12465-2 and ISO 12465-3, based upon moisture resistance as follows.

a) Class 1: dry conditions

This bonding class is appropriate for veneer plywood intended for use in normal interior climates.

b) Class 2: humid conditions

This bonding class is appropriate for veneer plywood intended for protected external applications (e.g behind cladding or under roof coverings), but capable of resisting weather exposure for short periods (e.g. when exposed during construction). It is also suitable for interior situations where the service moisture condition is higher than the class 1 level.

c) Class 3: exterior conditions

This bonding class is designed for veneer plywood intended for exposure to weather over sustained periods.

NOTE The durability of plywood depends not only upon the level of bonding performance, but also upon other factors.

© ISO 1999 – All rights reserved

4 Requirements

For each pretreatment, both the mean shear strength and the average apparent cohesive wood failure, determined in accordance with ISO 12466-1 for a minimum of ten test pieces per glueline, shall satisfy the criteria given in Table 2 for all three bonding classes.

The pretreatments chosen are related to the bonding class of the plywood veneer, as given in Table 1.

Each pretreatment shall be carried out on a separate set of ten pieces for each glueline.

Table 1 — Pretreatments for the three plywood bonding classes

Bonding class	Pretreatments (in accordance with ISO 12466-1, subclause)			
	5.1 a)	5.1 b)	5.1 c) *	5.1 d)
Class 1: dry conditions	х			
Class 2: humid conditions	x	x		
Class 3: exterior conditions	х		x	x

^{*} When full phenolic glues are used, pretreatment 5.1 c) can be used provided pretreatment 5.1 d) is occasionally used as a test of confirmation.

iTeh STANDARD PREVIEW

For all three bonding classes, each glueline shall satisfy two criteria: the mean shear strength and the average apparent cohesive wood failure, as combined in Table 21 0 s.11eh.a1

Table 2 — Glueline requirements

https://standards.iteh.ai/catalog/standards/sist/ac472741-7bdb-4c55-89e8-			
Mean shear strength: $f_{\rm V}$	4/isAverage apparent cohesive wood failure		
N/mm ²	%		
$0.2 \leqslant f_{V} < 0.4$	≥ 80		
$0.4 \le f_{V} < 0.6$	≥ 60		
$0.6 \leqslant f_{V} < 1.0$	≥ 40		
$1.0 \leqslant f_{V}$	no requirement		

The relationship between the average percentage of apparent cohesive wood failure and the mean shear strength given in Table 2 is illustrated in Figure 1.

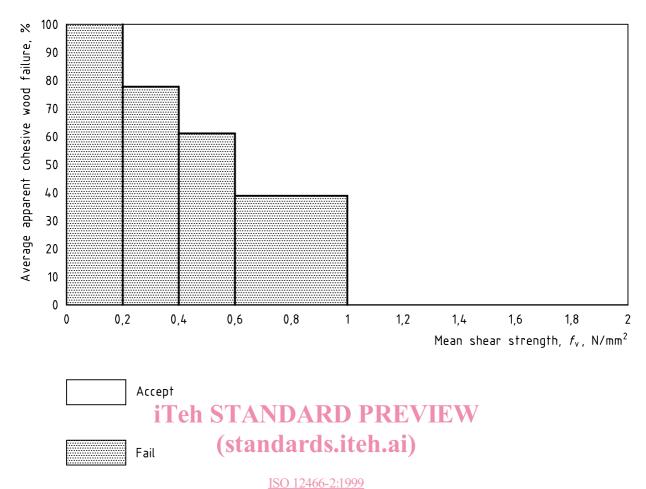


Figure 1 — Relation between average percentage of apparent cohesive wood failure and d93b4mean/shear strength99

5 Determination of bonding class

The comparison of results obtained in accordance with ISO 12466-1 with the requirements defined in this part of ISO 12466 allows determination of the bonding class to which the tested panel belongs.

© ISO 1999 – All rights reserved

Bibliography

- [1] ISO 1096, Plywood Classification.
- [2] ISO 2074, Plywood Vocabulary.
- [3] ISO 12465-1, Plywood Specifications Part 1: Requirements for plywood for use in dry conditions.
- [4] ISO 12465-2, Plywood Specifications Part 2: Requirements for plywood for use in humid conditions.
- [5] ISO 12465-3, Plywood Specifications Part 3: Requirements for plywood for use in exterior conditions.

iTeh STANDARD PREVIEW (standards.iteh.ai)

iTeh STANDARD PREVIEW (standards.iteh.ai)