
**Small craft — Steering gear — Geared link
systems**

Petits navires — Appareils à gouverner — Transmissions à engrenages

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 13929:2001

[https://standards.iteh.ai/catalog/standards/sist/f3286047-ca41-435d-8e0f-
ce323b179f68/iso-13929-2001](https://standards.iteh.ai/catalog/standards/sist/f3286047-ca41-435d-8e0f-ce323b179f68/iso-13929-2001)



Reference number
ISO 13929:2001(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 13929:2001

<https://standards.iteh.ai/catalog/standards/sist/f3286047-ca41-435d-8e0f-ce323b179f68/iso-13929-2001>

© ISO 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 13929 was prepared by Technical Committee ISO/TC 188, *Small craft*.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 13929:2001

<https://standards.iteh.ai/catalog/standards/sist/f3286047-ca41-435d-8e0f-ce323b179f68/iso-13929-2001>

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

ISO 13929:2001

<https://standards.iteh.ai/catalog/standards/sist/f3286047-ca41-435d-8e0f-ce323b179f68/iso-13929-2001>

Small craft — Steering gear — Geared link systems

1 Scope

This International Standard specifies the minimum level of requirements for construction, operation and installation of geared link steering systems on all types of small craft of hull length up to 24 m.

It excludes steering systems covered by ISO 8848 and ISO 9775.

2 Terms and definitions

For the purposes of this International Standard, the following terms and definitions apply.

2.1

geared link system

system in which rotation of the steering wheel positions the rudder blade by means of gearboxes, which converts the rotary motion to a push/pull force on the rudder operating lever, via a draglink assembly

2.2

draglink

component linking the rack operating lever to the rudder operating lever, which transmits the push and pull forces and allows rotational and angular misalignment

2.3

rudder operating lever

component fixed to the rudder, transmitting the torque to the rudder shaft from the steering system

2.4

rack operating lever

component fixed to the shaft of a steering system which rotates in relationship to movement of the steering wheel and achieves a corresponding movement of the rudder operating lever via the draglink

2.5

maximum output force

force that the system can supply upon application of a 450 N force tangentially to the wheel

3 Illustration of a geared link steering system

Figure 1 shows a geared link system and remotely mounted direct link system.

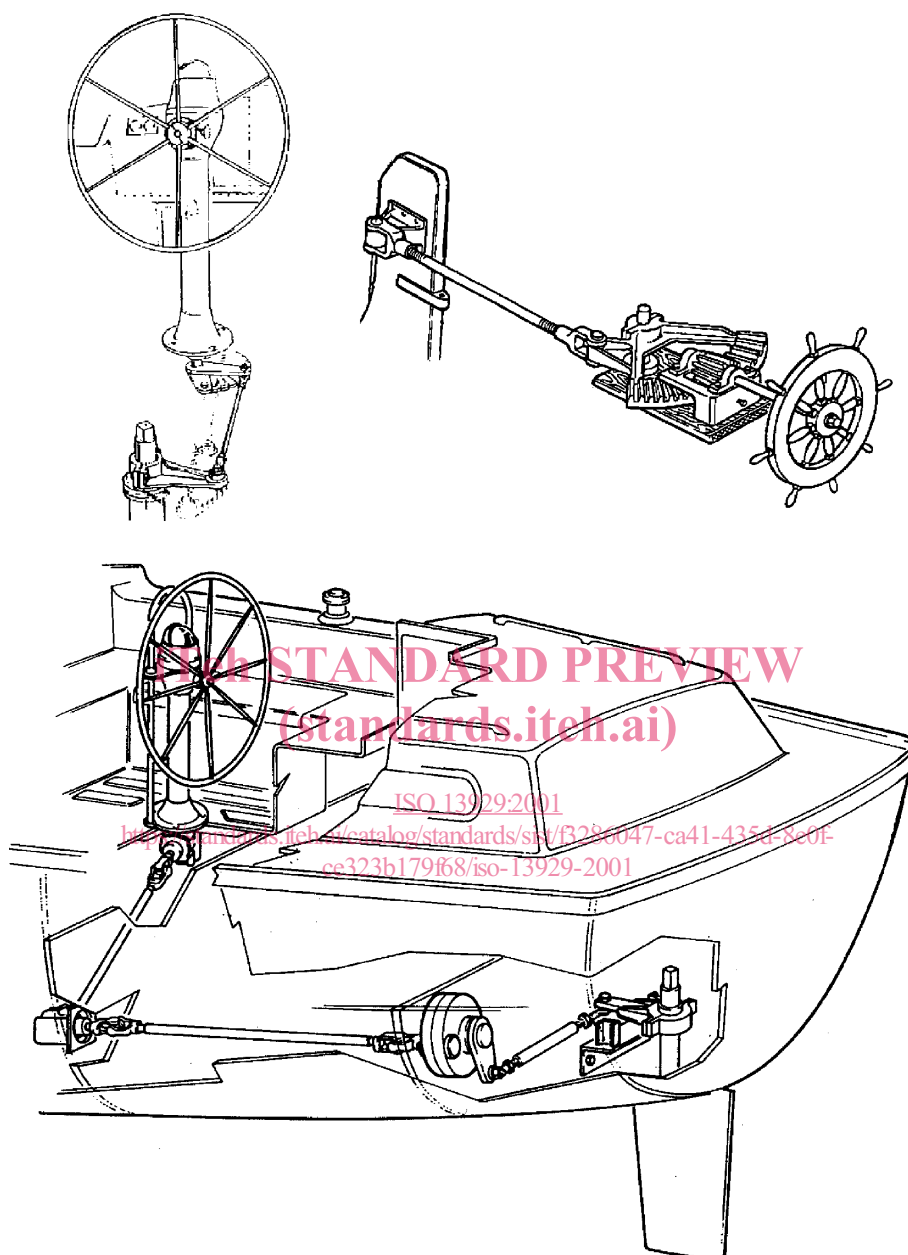


Figure 1 — Geared link system and remotely mounted direct link system

4 Constructional requirements

4.1 General

4.1.1 Steering rating

The steering system type shall be rated according to both its maximum permissible output torque and the corresponding rudder torques produced both at rudder midships and full lock. The manufacturer's specification for the maximum permissible output torque shall be used to determine the tangential torque tests as specified in 6.3.

4.1.2 Fasteners

All threaded fasteners whose integrity affects safe operation of the steering system shall be provided with a means for locking.

4.1.3 Materials

The choice and combination of materials shall be such as to minimize the risk of corrosion and galvanic action.

4.2 Specific

4.2.1 Rudder angle

The steering system manufacturer shall specify the maximum rudder angle.


4.2.2 Compass interference

Materials used in the various components of the steering system as supplied shall not affect the accuracy and reliability of a compass mounted on the pedestal if used, whatever the steering angle may be.

4.2.3 Draglink

The construction of the draglink shall be such that it will allow ± 20 mm of length adjustment and a minimum of 15° angular misalignment. Means shall be provided to secure the draglink after adjustments (see Figure 2).

Where the rudder lever and the operating lever are in the same plane and there is no angular misalignment, a clevis fitting is permissible.

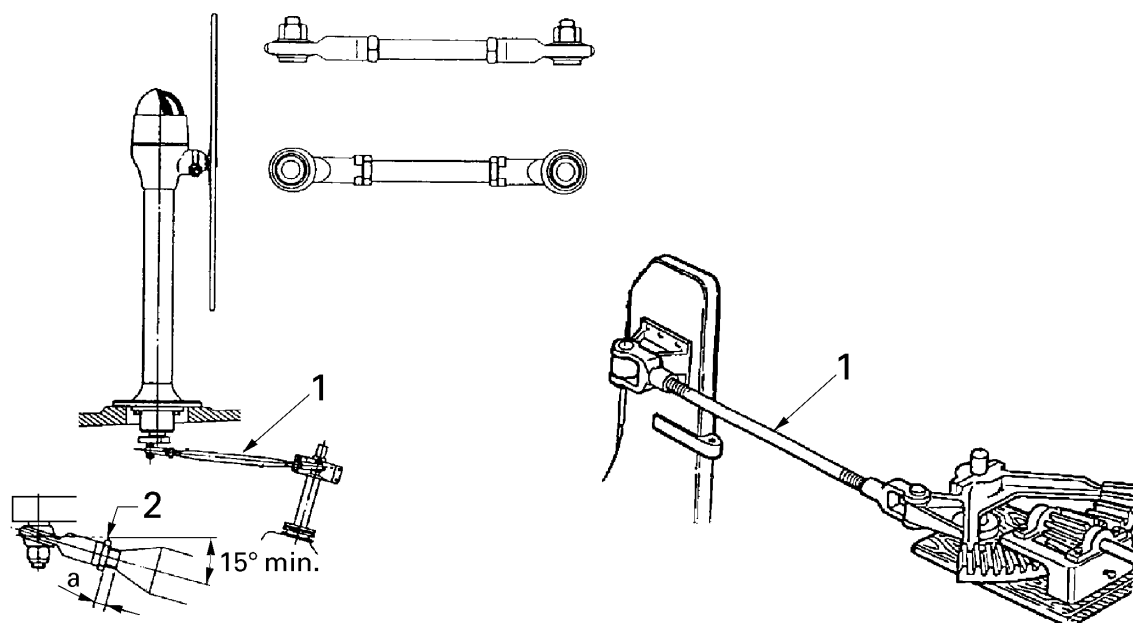

Key

1 Draglink

2 Locknut

a ± 20 mm adjustment


iTeh STANDARD PREVIEW
(standards.iTeh.ai)

4.2.4 Rudder/rack operating levers

ISO 13929:2001

The ratio of the operating lengths of the rudder and rack operating levers shall be arranged to ensure that the rack operating lever travels 65°, as a maximum, from neutral in either direction to achieve full rudder travel (see Figure 3).

The method of attaching the rudder operating lever shall withstand 150 % of the torque.

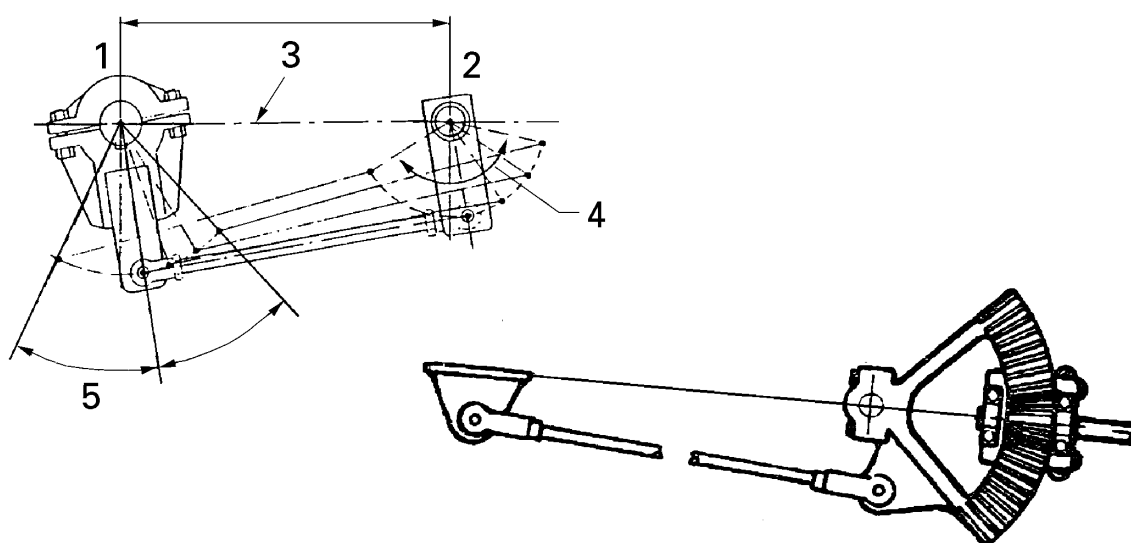

Key

1 Rudder operating lever

2 Rack operating lever

3 Centreline of yacht

4 Maximum permissible operating angle 130°

5 Full rudder travel

Figure 3 — Rudder/rack operating lever

4.2.5 Fastening

The system components shall be designed to allow for secure fastening to the boat structure.

5 Installation requirements

5.1 Fastening

To ensure the proper operation of a steering system, all components shall be securely fastened to the structure of the craft, which should be reinforced as necessary.

Threaded fasteners which may be expected to be disturbed by installation or adjustment procedures, whose integrity affects operation of the system such that separation or loss of the fasteners would cause sudden loss of steering without warning shall

- a) be referenced by instructions for correct assembly, and
- b) be locked by a device whose presence is determined by visual inspection or by feel following the assembly, or incorporate integral locking means, provided the fastener cannot be omitted, or substituted for, without making the system inoperable.

NOTE Self-locking nuts with plastic inserts which create mechanical plastic interference meet the requirements of this subclause.

5.2 Rudder stops


iTeh STANDARD PREVIEW
(standards.iteh.ai)

Stops shall be fitted to ensure that the maximum rudder angle specified by the steering system manufacturer is not exceeded.

ISO 13929:2001

NOTE The rudder stops may operate on the rudder operating lever, an independent lever attached to the rudder stock, or the rack operating lever or the rudder itself.

The strength of the rudder stops shall be adequate to withstand 150 % of the specified maximum output force at full lock of the steering type as specified in 4.1.1 (see Figure 4).

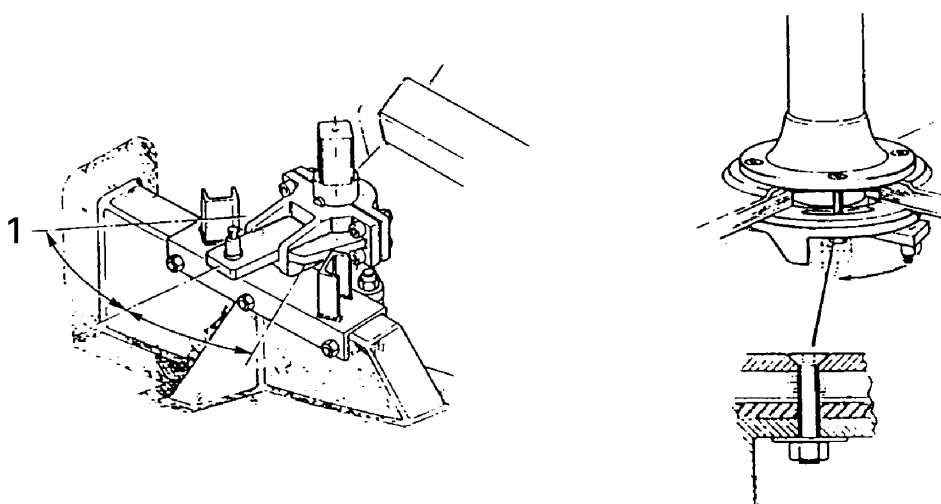

Key

- 1 Full rudder travel

Figure 4 — Rudder stops