

---

---

**Road vehicles — High-tension connectors  
for ignition coils and distributors —**

**Part 2:  
Plug-types**

*Véhicules routiers — Connecteurs à haute tension pour bobines et  
distributeurs d'allumage*

*Partie 2: Type mâle*

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

ISO 3553-2:1997

<https://standards.iteh.ai/catalog/standards/sist/96aebb3c-57a1-4c13-875a-8bd261cdfb28/iso-3553-2-1997>



## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 3553-2 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 1, *Ignition equipment*.

This second edition cancels and replaces the first edition (ISO 3553-2:1987), which has been technically revised.

ISO 3553 consists of the following parts, under the general title *Road vehicles — High-tension connectors for ignition coils and distributors*:

- *Part 1: Socket-type*
- *Part 2: Plug-types*

Annex A forms an integral part of this part of ISO 3553.

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case postale 56 • CH-1211 Genève 20 • Switzerland  
Internet central@iso.ch  
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

# Road vehicles — High-tension connectors for ignition coils and distributors —

## Part 2: Plug-types

### 1 Scope

This part of ISO 3553 specifies the essential dimensions of plug-type high-tension connectors for ignition coils and distributors, used for spark-ignited engines.

### 2 Requirements

iTeh STANDARD PREVIEW

(standards.iteh.ai)


Connectors of type C shall meet the dimensions shown in figure 1.

Connectors of types D, E and F shall meet the dimensions shown in figure 2.

In special circumstances the design given in annex A may be used when agreed between the supplier and the engine manufacturer.

Details not specified in this part of ISO 3553 are left to the manufacturer's choice.


Dimensions in millimetres

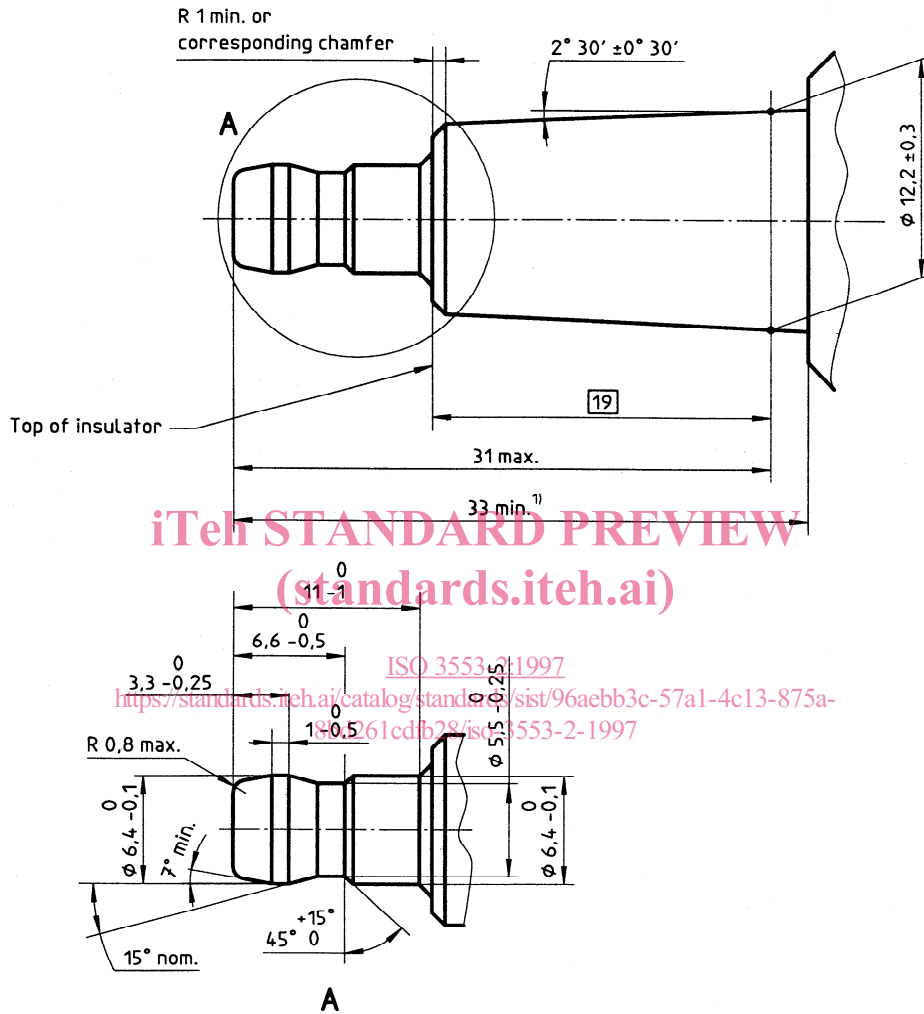

1) This dimension shall be 34 mm min. for new designs.

Figure 1 — Type C connectors

Dimensions in millimetres

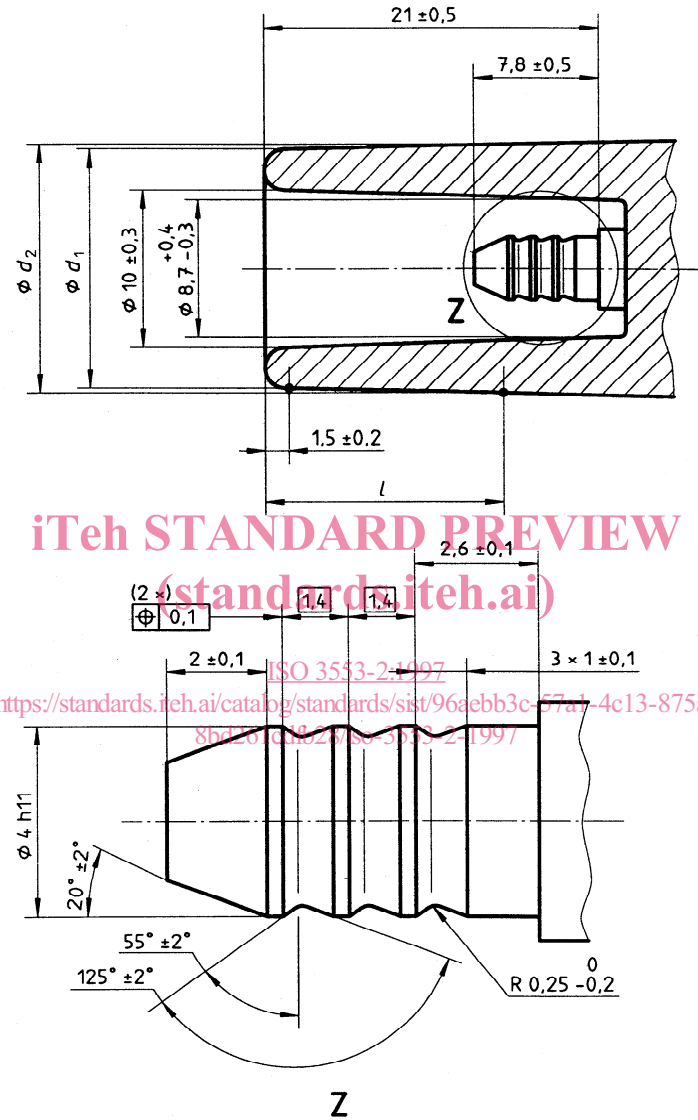

iTeh STANDARD PREVIEW  
 (standards.iteh.ai)  
 ISO 3553-2:1997  
<https://standards.iteh.ai/catalog/standards/sist/96aebb3c-57a7-4c13-875a-8bd261ca8224/iso-3553-2-1997>

Type of connector	$d_1$ $+0,5$ $0$	$d_2$ $\pm 0,25$	$l$ $\pm 0,5$
D	15	16	15
E	17,75	19,1	25
F	14	14,2	24

Figure 2 — Connectors of types D, E and F

**Annex A**  
(normative)


**Connectors of types D, E, F — Design options**

The design of the connector shown in figure A.1 is only to be used in special circumstances when agreed between the supplier and the engine manufacturer.

The most important differences between the detail Z shown in figure A.1 and the detail Z shown in figure 2 is that the angle  $\alpha$  replaces the angle of  $55^\circ$  specified in figure 2. This angle is not specified in order to allow a variation in the withdrawal force by varying the value of this angle.

Depending upon the female part of the connection that is used and the required withdrawal force, the angle  $\alpha$  shall be agreed between the supplier and the engine manufacturer. However, the angle  $\alpha$  should be greater than  $45^\circ$  and less than  $70^\circ$ .

Dimensions in millimetres

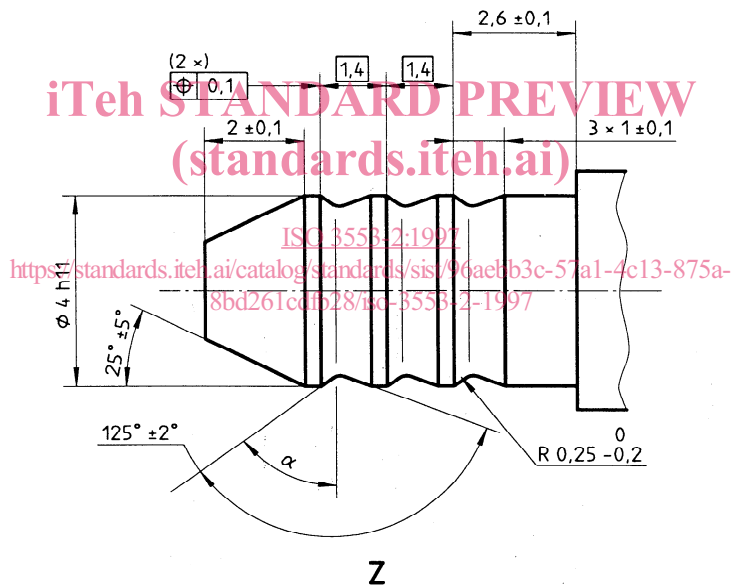

**Figure A.1 — Alternative detail Z**

**iTeh STANDARD PREVIEW**  
This page intentionally left blank  
**(standards.iteh.ai)**

ISO 3553-2:1997

<https://standards.iteh.ai/catalog/standards/sist/96aebb3c-57a1-4c13-875a-8bd261cdfb28/iso-3553-2-1997>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 3553-2:1997

<https://standards.iteh.ai/catalog/standards/sist/96aebb3c-57a1-4c13-875a-8bd261cdfb28/iso-3553-2-1997>

---

---

**ICS 43.060.50**

**Descriptors:** road vehicles, controlled ignition engines, ignition systems, electrical equipment, high voltage switchgear, ignition coils, ignition distributors, electric connectors, plug connectors, dimensions.

Price based on 4 pages

---

---