



SLOVENSKI STANDARD
SIST ES 204 915-4-4 V1.1.1:2008

01-september-2008

CXdfh]Xcglcd`Xc`glcf]hj YfCG5 L!'5 d`] UW'g_]dfc[fUa g_]j a Ygb]`f5 D=L!'("XY.
?fa]`Yb`Y_]WU!'("dcXXY.`@lglbcghglcf]hj YbY`na cÿbcgh]fG7 : L'df]`_fa]`Yb`
j Y dfYXghUj bcglb] \ `_]Wj `fDUf`Um* L

Open Service Access (OSA) - Application Programming Interface (API) - Part 4: Call Control - Sub-part 4: Multi-Media Call Control SCF (Parlay 6)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ES 204 915-4-4 V1.1.1:2008
https://standards.iteh.ai/catalog/standards/sist/98a92955-be02-4c98-b93e-589866ed5349/sist-es-204-915-4-4-v1-1-1-2008](https://standards.iteh.ai/catalog/standards/sist/98a92955-be02-4c98-b93e-589866ed5349/sist-es-204-915-4-4-v1-1-1-2008)

Ta slovenski standard je istoveten z: ES 204 915-4-4 Version 1.1.1

ICS:

35.100.01 Medsebojno povezovanje Open systems
odprtih sistemov na splošno interconnection in general

SIST ES 204 915-4-4 V1.1.1:2008 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ES 204 915-4-4 V1.1.1:2008

<https://standards.iteh.ai/catalog/standards/sist/98a92955-be02-4c98-b93e-589866ed5349/sist-es-204-915-4-4-v1-1-1-2008>

ETSI ES 204 915-4-4 V1.1.1 (2008-05)

ETSI Standard

**Open Service Access (OSA);
Application Programming Interface (API);
Part 4: Call Control;
Sub-part 4: Multi-Media Call Control SCF
(Parlay 6)**



**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST ES 204 915-4-4 V1.1.1:2008](https://standards.iteh.ai/catalog/standards/sist/98a92955-be02-4c98-b93e-589866ed5349/sist-es-204-915-4-4-v1-1-1-2008)

<https://standards.iteh.ai/catalog/standards/sist/98a92955-be02-4c98-b93e-589866ed5349/sist-es-204-915-4-4-v1-1-1-2008>



Reference

DES/TISPAN-01032-4-04-OSA

Keywords

API, IDL, OSA, UML

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ES 204 915-4-4 V1.1.1:2008

<https://standards.iteh.ai/catalog/standards/sist/98a92955-be02-4c98-b93e-589866ed5342/sist-204-915-4-v1-1-1-2008>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2008.

© The Parlay Group 2008.

All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	6
Foreword.....	6
1 Scope	8
2 References	8
3 Definitions and abbreviations.....	8
3.1 Definitions	8
3.2 Abbreviations	8
4 MultiMedia Call Control Service Sequence Diagrams	9
4.1 Barring for media combined with call routing, alternative 1	9
4.2 Barring for media combined with call routing, alternative 2.....	10
4.3 Barring for media, simple.....	12
4.4 Call Volume charging supervision	13
5 Class Diagrams.....	15
6 MultiMedia Call Control Service Interface Classes.....	16
6.1 Interface Class IpMultiMediaCallControlManager.....	17
6.1.1 Method createMediaNotification()	17
6.1.2 Method destroyMediaNotification()	18
6.1.3 Method changeMediaNotification()	18
6.1.4 Method getMediaNotification()	19
6.2 Interface Class IpAppMultiMediaCallControlManager.....	19
6.2.1 Method reportMediaNotification()	19
6.3 Interface Class IpMultiMediaCall	20
6.3.1 Method superviseVolumeReq()	20
6.4 Interface Class IpAppMultiMediaCall	21
6.4.1 Method superviseVolumeRes()	21
6.4.2 Method superviseVolumeErr()	22
6.5 Interface Class IpMultiMediaCallLeg	22
6.5.1 Method mediaStreamAllow()	22
6.5.2 Method mediaStreamMonitorReq().....	23
6.5.3 Method getMediaStreams()	23
6.6 Interface Class IpAppMultiMediaCallLeg	23
6.6.1 Method mediaStreamMonitorRes()	24
6.7 Interface Class IpMultiMediaStream.....	24
6.7.1 Method subtract().....	24
7 MultiMedia Call Control Service State Transition Diagrams	25
8 Multi-Media Call Control Data Definitions	25
8.1 Event Notification Data Definitions	25
8.1.1 TpMediaStreamRequestSet	25
8.1.2 TpMediaStreamRequest.....	25
8.1.3 TpMediaStreamDirection	25
8.1.4 TpMediaStreamDataTypeRequest	26
8.1.5 TpMediaStreamDataTypeRequestType	26
8.1.6 TpAudioCapabilitiesType.....	26
8.1.7 TpVideoCapabilitiesType	27
8.1.8 TpDataCapabilities	27
8.1.9 TpMediaStreamEventType	27
8.1.10 TpMediaStreamSet	27
8.1.11 TpMediaStream	27
8.1.12 TpMediaStreamDataType.....	27
8.2 Multi-Media Call Control Data Definitions	27
8.2.1 IpMultiMediaCall	27

8.2.2	IpMultiMediaCallRef.....	28
8.2.3	IpAppMultiMediaCall	28
8.2.4	IpAppMultiMediaCallRef.....	28
8.2.5	IpMultiMediaCallLeg	28
8.2.6	IpMultiMediaCallLegRef	28
8.2.7	IpAppMultiMediaCallLeg	28
8.2.8	IpAppMultiMediaCallLegRef.....	28
8.2.9	TpAppMultiMediaCallLegRefSet	28
8.2.10	TpMultiMediaCallIdentifier	28
8.2.11	TpMultiMediaCallIdentifierSet	28
8.2.12	TpMultiMediaCallLegIdentifier	28
8.2.13	TpMultiMediaCallLegIdentifierSet	29
8.2.14	IpAppMultiMediaCallControlManager	29
8.2.15	IpAppMultiMediaCallControlManagerRef	29
8.2.16	TpAppMultiMediaCallBack	29
8.2.17	TpAppMultiMediaCallBackRefType	29
8.2.18	TpAppMultiMediaCallLegCallBack	29
8.2.19	TpCallSuperviseVolume.....	30
8.2.20	TpNotificationMediaRequest.....	30
8.2.21	TpMediaNotificationRequested.....	30
8.2.22	TpMediaNotificationsRequestedSet	30
Annex A (normative):		
	OMG IDL Description of Multi-Media Call Control SCF.....	31
Annex B (informative):		
	W3C WSDL Description of Multi-Media Call Control SCF	32
Annex C (informative):		
	Java API Description of the Call Control SCFs.....	33
Annex D (informative):		
	Contents of 3GPP OSA Rel-7 Call Control	34
Annex E (informative):		
	Description of Call Control Sub-part 4: Multimedia call control SCF for 3GPP2 cdma2000 networks	35
E.1	General Exceptions.....	35
E.2	Specific Exceptions	35
E.2.1	Clause 1: Scope	35
E.2.2	Clause 2: References	35
E.2.3	Clause 3: Definitions and abbreviations	35
E.2.4	Clause 4: MultiMedia Call Control Service Sequence Diagrams.....	35
E.2.5	Clause 5: Class Diagrams.....	35
E.2.6	Clause 6: MultiMedia Call Control Service Interface Classes	35
E.2.7	Clause 7: MultiMedia Call Control Service State Transition Diagrams.....	36
E.2.8	Clause 8: Multi-Media Call Control Data Definitions.....	36
E.2.9	Annex A (normative): OMG IDL Description of Multi-Media Call Control SCF.....	36
E.2.10	Annex B (informative): W3C WSDL Description of Multi-Media Call Control SCF.....	36
E.2.11	Annex C (informative): Java™ API Description of the Call Control SCF	36
Annex F (informative):		
	Record of changes	37
F.1	Interfaces	37
F.1.1	New	37
F.1.2	Deprecated.....	37
F.1.3	Removed.....	37
F.2	Methods.....	37
F.2.1	New	37
F.2.2	Deprecated.....	37
F.2.3	Modified	38
F.2.4	Removed.....	38
F.3	Data Definitions	38
F.3.1	New	38
F.3.2	Modified.....	38

F.3.3	Removed.....	38
F.4	Service Properties.....	38
F.4.1	New	38
F.4.2	Deprecated.....	38
F.4.3	Modified	39
F.4.4	Removed.....	39
F.5	Exceptions	39
F.5.1	New	39
F.5.2	Modified.....	39
F.5.3	Removed.....	39
F.6	Others	39
History	40

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ES 204 915-4-4 V1.1.1:2008](https://standards.iteh.ai/catalog/standards/sist/98a92955-be02-4c98-b93e-589866ed5349/sist-es-204-915-4-4-v1-1-1-2008)

<https://standards.iteh.ai/catalog/standards/sist/98a92955-be02-4c98-b93e-589866ed5349/sist-es-204-915-4-4-v1-1-1-2008>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This ETSI Standard (ES) has been produced by ETSI Technical Committee Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN).

The present document is part 4, sub-part 4 of a multi-part deliverable covering Open Service Access (OSA); Application Programming Interface (API), as identified below. The API specification (ES 204 915) is structured in the following parts:

Part 1: "Overview";

Part 2: "Common Data Definitions";

Part 3: "Framework";

Part 4: "Call Control";

Sub-part 1: "Call Control Common Definitions";

Sub-part 2: "Generic Call Control SCF";

Sub-part 3: "Multi-Party Call Control SCF";

Sub-part 4: "Multi-Media Call Control SCF";

Sub-part 5: "Conference Call Control SCF";

Part 5: "User Interaction SCF";

Part 6: "Mobility SCF";

Part 7: "Terminal Capabilities SCF";

Part 8: "Data Session Control SCF";

Part 9: "Generic Messaging SCF";

Part 10: "Connectivity Manager SCF";

Part 11: "Account Management SCF";

Part 12: "Charging SCF";

Part 13: "Policy Management SCF";

Part 14: "Presence and Availability Management SCF";

Part 15: "Multi-Media Messaging SCF"

Part 16: "Service Broker SCF".

ITih STANDARD PREVIEW
(standards.iteh.ai)

SIST ES 204 915-4-4 V1.1.1:2008

<https://standards.iteh.ai/catalog/standards/sist/98a92955-be02-4c98-b93e-18c866edf5cf/sist-es-204-915-4-4-v1-1-1-2008>

The present document has been defined jointly between ETSI, The Parlay Group (<http://www.parlay.org>) and the 3GPP, in co-operation with a number of JAIN™ Community (<http://www.java.sun.com/products/jain>) member companies.

The present document forms part of the Parlay 6.0 set of specifications.

The present document is equivalent to 3GPP TS 29.198-4-4 V7.0.0 (Release 7).

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ES 204 915-4-4 V1.1.1:2008

<https://standards.iteh.ai/catalog/standards/sist/98a92955-be02-4c98-b93e-589866ed5349/sist-es-204-915-4-4-v1-1-1-2008>

1 Scope

The present document is part 4, sub-part 4 of the Stage 3 specification for an Application Programming Interface (API) for Open Service Access (OSA).

The OSA specifications define an architecture that enables application developers to make use of network functionality through an open standardised interface, i.e. the OSA APIs.

The present document specifies the Multi-Media Call Control Service Capability Feature (SCF) aspects of the interface. All aspects of the Multi-Media Call Control SCF are defined here, these being:

- Sequence Diagrams.
- Class Diagrams.
- Interface specification plus detailed method descriptions.
- State Transition diagrams.
- Data Definitions.
- IDL Description of the interfaces.
- WSDL Description of the interfaces.
- Reference to the Java™ API description of the interfaces.

The process by which this task is accomplished is through the use of object modelling techniques described by the Unified Modelling Language (UML).

ITeH STANDARD PREVIEW
(standards.iteh.ai)

2 References

[SIST ES 204 915-4-4 V1.1.1:2008](https://standards.iteh.ai/catalog/standards/sist/98a92955-be02-4c98-b93e-589866ed5349/sist-es-204-915-4-4-v1-1-1-2008)

standards.iteh.ai/catalog/standards/sist/98a92955-be02-4c98-b93e-589866ed5349/sist-es-204-915-4-4-v1-1-1-2008

The references listed in clause 2 of ES 204 915-1 contain provisions which, through reference in this text, constitute provisions of the present document.

ETSI ES 204 915-1: "Open Service Access (OSA); Application Programming Interface (API); Part 1: Overview (Parlay 6)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ES 204 915-1 apply.

3.2 Abbreviations


For the purposes of the present document, the abbreviations given in ES 204 915-1 apply.

4 MultiMedia Call Control Service Sequence Diagrams

4.1 Barring for media combined with call routing, alternative 1

This sequence illustrates how one application can influence both the call routing and the media stream establishment of one call.

In this sequence there is one application handling both the media barring and the routing of the call.

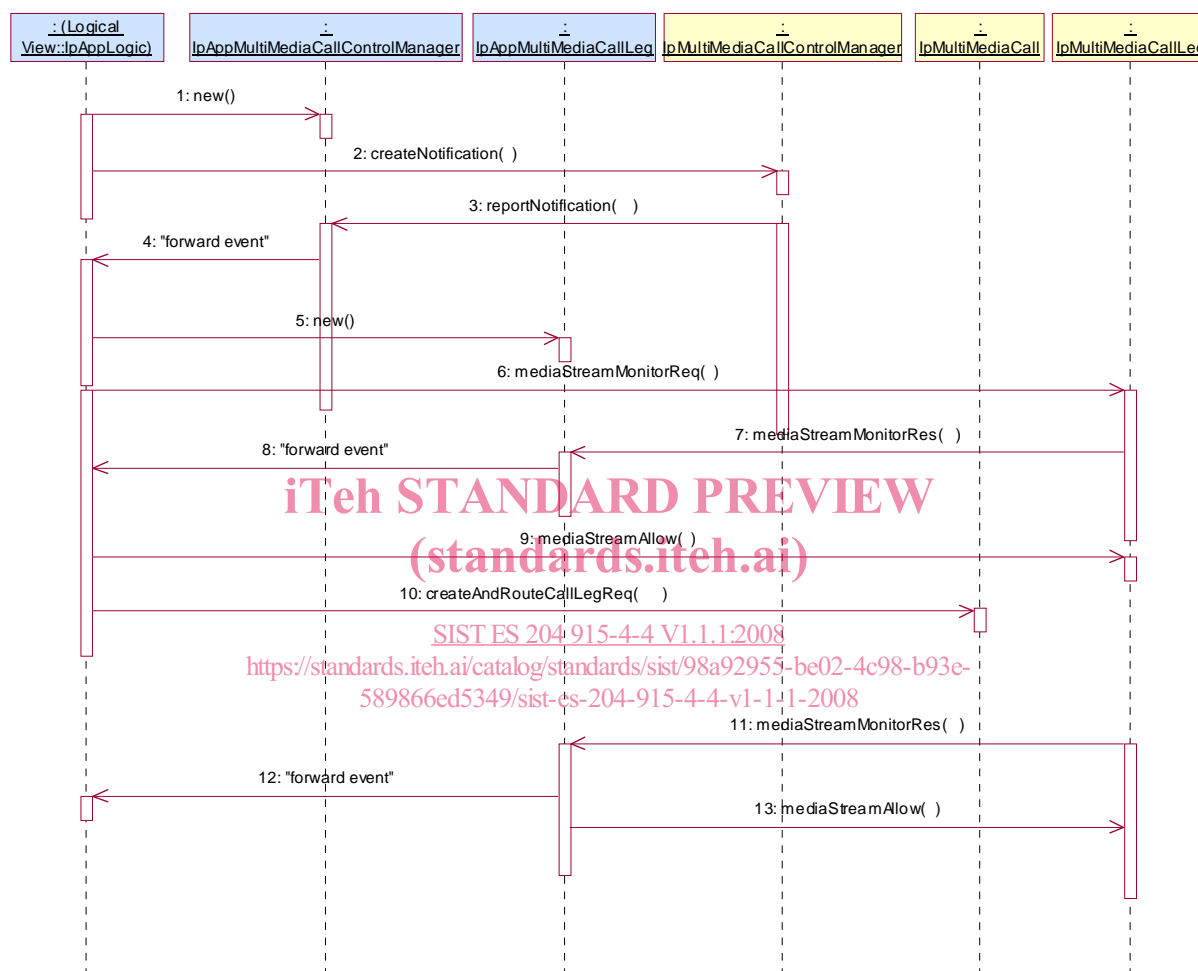

- 1: The application creates an `AppMultiMediaCallControlManager` interface in order to handle callback methods.
- 2: The application expresses interest in all calls from subscriber A. Since `createNotification` is used and not `createMediaNotification` all calls are reported regardless of the media used.
- 3: A makes a call with the SIP INVITE with SDP media stream indicating video. The application is notified.
- 4: The event is forwarded to the application.
- 5: The application creates a new `AppMultiMediaCallLeg` interface to receive callbacks.
- 6: The application sets a monitor on video media streams to be established (added) for the indicated leg.
- 7: Since the video media stream was included in the SIP invite, the media streams monitored will be returned in the monitor result.
- 8: The event is forwarded to the application.

- 9: The application denies the video media stream, i.e. it is not included in the allowed media streams. This corresponds to removing the media stream from the setup.
- 10: The application requests to reroute the call to a different destination (or the same one).
- 11: Later in the call the A party tries to establish a lower bandwidth video media stream. This is again reported with `MediaStreamMonitorRes`.
- 12: The event is forwarded.
- 13: This time the application allows the establishment of the media stream by including the media stream in the allowed list.


4.2 Barring for media combined with call routing, alternative 2

This sequence illustrates how one application can influence both the call routing and the media establishment of one call.

Media establishment and call establishment are regarded separately by the application.

From the gateway point of view it can actually be regarded as two separately triggered applications, one for media control and one for routing. This is also the way that it is shown here, for clarity.

However, an implementation of the application could combine the media logic and call logic in one object.

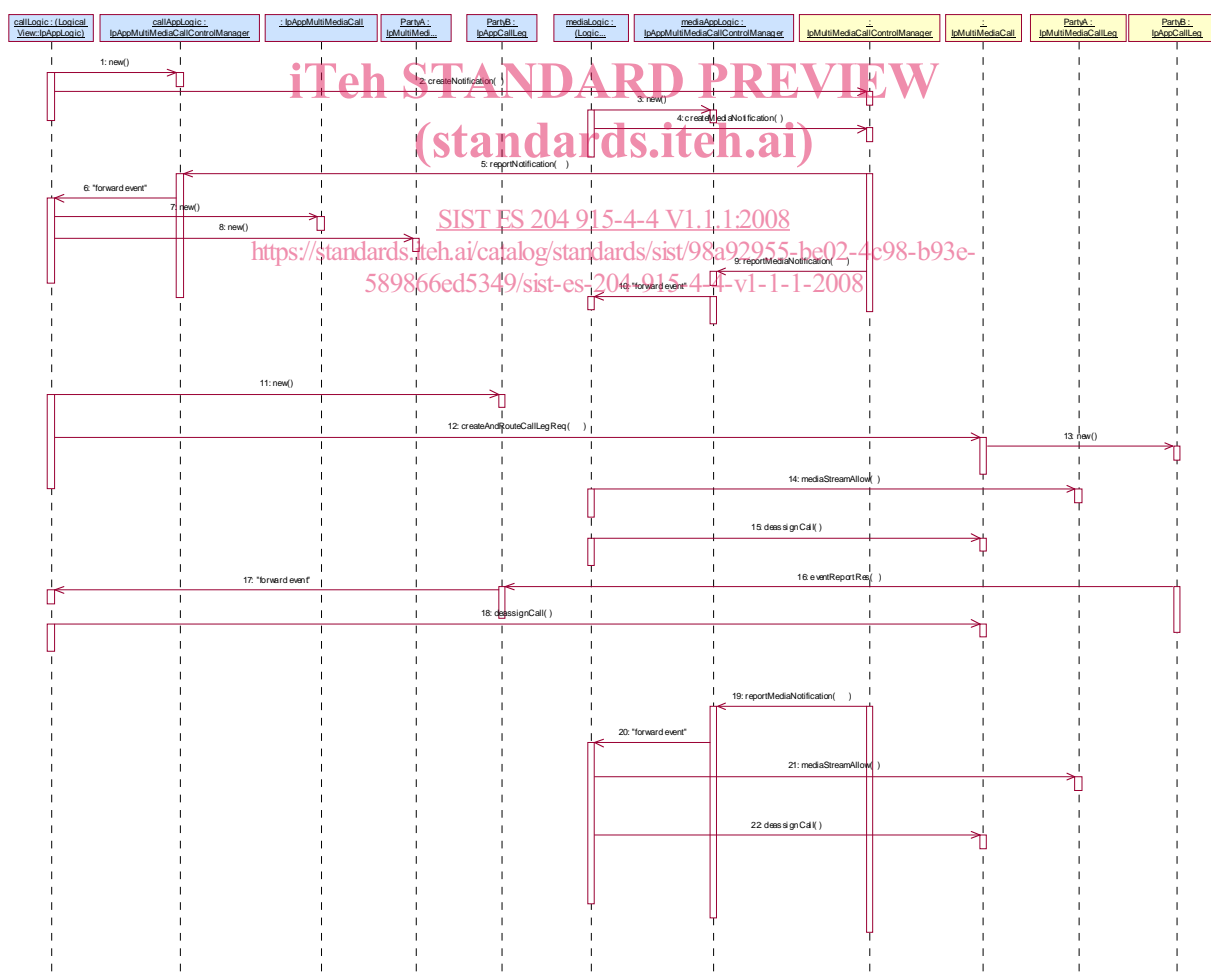

- 1: The application creates a new `AppMultiMediaCallControlManager` interface.
- 2: The application expresses interest in all calls from subscriber A for rerouting purposes.

- 3: The application creates a new AppMultiMediaCallControlManager interface. This is to be used for the media control only.
- 4: Separately the application expresses interest in some media streams for calls from and to A. The request indicates interrupt mode.
- 5: Subscriber A makes a call with the SIP INVITE with SDP media stream indicating video. Since the media establishment is combined with the SIP INVITE message, both applications are triggered (not necessarily in the order shown). Here the call application is notified about the call setup.
- 6: The event is forwarded to the call control application.
- 7: The call control application creates a new AppMultiMediaCall interface.
- 8: The call control application creates a new AppMultiMediaCallLeg interface.
- 9: The media application is notified about the call setup. All media streams from the setup will be indicated.
- 10: The event is forwarded to the media application.
- 11: The call control application creates a new AppMultiMediaCallLeg interface.
- 12: The call application decides to reroute the call to another address. Included in the request are monitors on answer and call end. However, since the media was also triggered in mode interrupt the call will not proceed until the media streams are confirmed or rejected.
- 14: The application allows the audio media stream, but refuses the high bandwidth video, by excluding it from the allowed list. Since both call processing and media handling is now acknowledged, the call routing can continue (with a changed SDP parameter reflecting the manipulated media).
- 15: The Media application is no longer interested in the call.
- 16: When the B subscriber answers the call application is notified.
- 17: The event is forwarded to the call application.
- 19: When later in the call A tries to establish a lower bandwidth video stream the media application is triggered.
- 20: The triggering is forwarded to the media application.
- 21: The application now allows the establishment of the media stream by including the media stream in the mediaStreamAllow list.
- 22: The media application is no longer interested in the call.