

ETSI ES 204 915-6 V1.1.1 (2008-05)

ETSI Standard

Open Service Access (OSA); Application Programming Interface (API); Part 6: Mobility SCF (Parlay 6)



iTeh STANDARD PREVIEW
(standards.iteh.ai)

Full standard:
<https://standards.iteh.ai/catalog/standards/sist/9ada98c0-5343-4b4b-a9b3-5b4566d0352c/etsi-es-204-915-6-v1.1.1-2008-05>



Reference

DES/TISPAN-01032-6-OSA

Keywords

API, IDL, OSA, UML

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2008.

© The Parlay Group 2008.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™**, **TIPHON™**, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	8
Foreword.....	8
1 Scope	9
2 References	9
3 Definitions and abbreviations.....	9
3.1 Definitions	9
3.2 Abbreviations	9
4 Mobility SCF.....	10
4.1 General requirements on support of methods.....	10
5 Sequence Diagrams	11
5.1 User Location Sequence Diagrams.....	11
5.1.1 User Location Interrogation - Triggered Request	11
5.1.2 User Location Interrogation - Periodic Request.....	12
5.1.3 User Location Interrogation - Interactive Request.....	13
5.2 User Location Camel Sequence Diagrams	14
5.2.1 User Location Camel Interrogation - Triggered Request.....	14
5.2.2 User Location Camel Interrogation - Periodic Request	15
5.2.3 User Location Camel Interrogation - Interactive Request	16
5.3 User Location Emergency Sequence Diagrams	16
5.3.1 Subscription and Network Induced Location Reports	16
5.3.2 Network Induced Location Reports	18
5.3.3 Interactive Location Request	18
5.4 User Status Sequence Diagrams	19
5.4.1 Triggered Reporting	19
5.4.2 Interactive Request	20
5.5 User Binding Sequence Diagrams.....	21
5.5.1 Subscription and Binding Request Notifications	21
6 Class Diagrams.....	22
6.1 User Location Class Diagrams	22
6.2 User Location Camel Class Diagrams.....	23
6.3 User Location Emergency Class Diagrams	23
6.4 User Status Class Diagrams.....	24
6.5 User Binding Class Diagrams	25
7 The Service Interface Specifications	25
7.1 Interface Specification Format	25
7.1.1 Interface Class	25
7.1.2 Method descriptions.....	25
7.1.3 Parameter descriptions	25
7.1.4 State Model	26
7.2 Base Interface	26
7.2.1 Interface Class IpInterface	26
7.3 Service Interfaces	26
7.3.1 Overview	26
7.4 Generic Service Interface	26
7.4.1 Interface Class IpService	26
7.4.1.1 Method setCallback()	27
7.4.1.2 Method setCallbackWithSessionID().....	27
8 Mobility Interface Classes.....	27
8.1 User Location Interface Classes	27
8.1.1 Interface Class IpUserLocation.....	28
8.1.1.1 Method locationReportReq().....	28

8.1.1.2	Method extendedLocationReportReq()	29
8.1.1.3	Method periodicLocationReportingStartReq()	29
8.1.1.4	Method periodicLocationReportingStop()	30
8.1.1.5	Method getNextPeriodicLocationRequest()	30
8.1.2	Interface Class IpAppUserLocation	30
8.1.2.1	Method locationReportRes()	31
8.1.2.2	Method locationReportErr()	31
8.1.2.3	Method extendedLocationReportRes()	32
8.1.2.4	Method extendedLocationReportErr()	32
8.1.2.5	Method periodicLocationReport()	32
8.1.2.6	Method periodicLocationReportErr()	32
8.1.3	Interface Class IpTriggeredUserLocation	33
8.1.3.1	Method triggeredLocationReportingStartReq()	33
8.1.3.2	Method triggeredLocationReportingStop()	34
8.1.3.3	Method getNextTriggeredLocationRequest()	34
8.1.4	Interface Class IpAppTriggeredUserLocation	34
8.1.4.1	Method triggeredLocationReport()	35
8.1.4.2	Method triggeredLocationReportErr()	35
8.1.4.3	Method triggeredReportingEnded()	35
8.2	User Location Camel Interface Classes	36
8.2.1	Interface Class IpUserLocationCamel	36
8.2.1.1	Method locationReportReq()	36
8.2.1.2	Method periodicLocationReportingStartReq()	37
8.2.1.3	Method periodicLocationReportingStop()	37
8.2.1.4	Method triggeredLocationReportingStartReq()	38
8.2.1.5	Method triggeredLocationReportingStop()	38
8.2.1.6	Method getNextPeriodicLocationRequest()	38
8.2.1.7	Method getNextTriggeredLocationRequest()	39
8.2.2	Interface Class IpAppUserLocationCamel	40
8.2.2.1	Method locationReportRes()	40
8.2.2.2	Method locationReportErr()	40
8.2.2.3	Method periodicLocationReport()	41
8.2.2.4	Method periodicLocationReportErr()	41
8.2.2.5	Method triggeredLocationReport()	41
8.2.2.6	Method triggeredLocationReportErr()	42
8.2.2.7	Method triggeredReportingEnded()	42
8.3	User Location Emergency Interface Classes	42
8.3.1	Interface Class IpUserLocationEmergency	42
8.3.1.1	Method emergencyLocationReportReq()	43
8.3.1.2	Method subscribeEmergencyLocationReports()	43
8.3.1.3	Method unsubscribeEmergencyLocationReports()	44
8.3.2	Interface Class IpAppUserLocationEmergency	44
8.3.2.1	Method emergencyLocationReport()	44
8.3.2.2	Method emergencyLocationReportErr()	45
8.4	User Status Interface Classes	45
8.4.1	Interface Class IpAppUserStatus	45
8.4.1.1	Method statusReportRes()	46
8.4.1.2	Method statusReportErr()	46
8.4.1.3	Method triggeredStatusReport()	47
8.4.1.4	Method triggeredStatusReportErr()	47
8.4.1.5	Method extendedStatusReportRes()	47
8.4.1.6	Method extendedStatusReportErr()	47
8.4.1.7	Method extTriggeredStatusReport()	48
8.4.1.8	Method extTriggeredStatusReportErr()	48
8.4.1.9	Method triggeredReportingEnded()	48
8.4.2	Interface Class IpUserStatus	48
8.4.2.1	Method statusReportReq()	49
8.4.2.2	Method triggeredStatusReportingStartReq()	49
8.4.2.3	Method triggeredStatusReportingStop()	50
8.4.2.4	Method getNextTriggeredStatusRequest()	50
8.4.2.5	Method extendedStatusReportReq()	51
8.4.2.6	Method extTriggeredStatusReportingStartReq()	51

8.4.2.7	Method extTriggeredStatusReportingStop()	52
8.5	User Binding Interface Classes	52
8.5.1	Interface Class IpUserBinding	52
8.5.1.1	Method triggeredBindingRequestNotificationStartReq().....	52
8.5.1.2	Method triggeredBindingRequestNotificationStop()	53
8.5.2	Interface Class IpAppUserBinding	53
8.5.2.1	Method triggeredBindingRequestNotification()	53
8.5.2.2	Method triggeredBindingRequestNotificationStartErr().....	54
9	State Transition Diagrams	54
9.1	User Location	54
9.2	User Location Camel.....	54
9.2.1	State Transition Diagrams for IpUserLocationCamel.....	54
9.2.1.1	Active State	55
9.3	User Location Emergency	55
9.4	User Status.....	55
9.4.1	State Transition Diagrams for IpUserStatus	55
9.4.1.1	Active State	55
9.5	User Binding	55
10	Service Properties.....	56
10.1	Mobility Properties.....	56
10.1.1	Emergency Application Subtypes.....	56
10.1.2	Value Added Application Subtypes.....	56
10.1.3	PLMN Operator Application Subtypes.....	56
10.1.4	Lawful Intercept Application Subtypes	57
10.1.5	Altitude Obtainable.....	57
10.1.6	Location Methods	57
10.1.7	Priorities.....	57
10.1.8	Max Interactive Requests.....	57
10.1.9	Max Triggered Users	57
10.1.10	Max Periodic Users.....	57
10.1.11	Min Periodic Interval Duration.....	58
10.1.12	Initial Report.....	58
10.1.13	Max Life Time	58
10.2	User Location Service Properties	58
10.3	User Location Camel Service Properties.....	59
10.4	User Location Emergency Service Properties	59
10.5	User Status Service Properties.....	60
11	Data Definitions	60
11.1	Common Mobility Data Definitions.....	60
11.1.1	TpGeographicalPosition	60
11.1.2	TpLocationPriority.....	61
11.1.3	TpLocationRequest	61
11.1.4	TpLocationResponseIndicator	62
11.1.5	TpLocationResponseTime	62
11.1.6	TpLocationType	62
11.1.7	TpLocationUncertaintyShape	62
11.1.8	TpMobilityDiagnostic.....	63
11.1.9	TpMobilityError	63
11.1.10	TpMobilityStopAssignmentData	64
11.1.11	TpMobilityStopScope.....	64
11.1.12	TpTerminalType	64
11.2	User Location Data Definitions.....	64
11.2.1	IpUserLocation	64
11.2.2	IpUserLocationRef.....	64
11.2.3	IpAppUserLocation	64
11.2.4	IpAppUserLocationRef.....	64
11.2.5	IpTriggeredUserLocation.....	64
11.2.6	IpTriggeredUserLocationRef.....	65
11.2.7	IpAppTriggeredUserLocation.....	65
11.2.8	IpAppTriggeredUserLocationRef.....	65

11.2.9	TpUIExtendedData	65
11.2.10	TpUIExtendedDataSet	65
11.2.11	TpUserLocationExtended	65
11.2.12	TpUserLocationExtendedSet	65
11.2.13	TpLocationTrigger	66
11.2.14	TpLocationTriggerSet	66
11.2.15	TpLocationTriggerCriteria	66
11.2.16	TpUserLocation	66
11.2.17	TpUserLocationSet	66
11.2.18	TpTriggeredLocationRequestSetEntry	67
11.2.19	TpTriggeredLocationRequestSet	67
11.2.20	TpTriggeredLocationRequest	67
11.2.21	TpPeriodicLocationRequestSetEntry	67
11.2.22	TpPeriodicLocationRequestSet	67
11.2.23	TpPeriodicLocationRequest	67
11.3	User Location Camel Data Definitions	67
11.3.1	IpUserLocationCamel	67
11.3.2	IpUserLocationCamelRef	68
11.3.3	IpAppUserLocationCamel	68
11.3.4	IpAppUserLocationCamelRef	68
11.3.5	TpLocationCellIDOrLAI	68
11.3.6	TpLocationTriggerCamel	68
11.3.7	TpUserLocationCamel	69
11.3.8	TpUserLocationCamelSet	69
11.4	User Location Emergency Data Definitions	69
11.4.1	IpUserLocationEmergency	69
11.4.2	IpUserLocationEmergencyRef	69
11.4.3	IpAppUserLocationEmergency	69
11.4.4	IpAppUserLocationEmergencyRef	69
11.4.5	TpIMEI	69
11.4.6	TpNaESRD	69
11.4.7	TpNaESRK	70
11.4.8	TpUserLocationEmergencyRequest	70
11.4.9	TpUserLocationEmergency	71
11.4.10	TpUserLocationEmergencyTrigger	71
11.5	User Status Data Definitions	71
11.5.1	IpUserStatus	71
11.5.2	IpUserStatusRef	71
11.5.3	IpAppUserStatus	71
11.5.4	IpAppUserStatusRef	71
11.5.5	TpUserStatus	72
11.5.6	TpUserStatusSet	72
11.5.7	TpUserStatusIndicator	72
11.5.8	TpTriggeredStatusRequestSetEntry	72
11.5.9	TpTriggeredStatusRequestSet	72
11.5.10	TpTriggeredStatusRequest	72
11.5.11	TpUserStatusExtended	73
11.5.12	TpUserStatusExtendedSet	73
11.5.13	TpUserStatusIndicatorExtended	73
11.5.14	TpAuthStatusIndicator	73
11.5.15	TpUserInfo	74
11.5.16	TpNetworkStatusIndicator	74
11.5.17	TpAccessTechnology	74
11.5.18	TpRoamingStatus	74
11.6	User Binding Data Definitions	74
11.6.1	TpBindingSet	74
11.6.2	TpBindingEntrySet	74
11.6.3	TpBindingEntry	75
11.6.4	TpBindingEntryType	75
11.6.5	TpBindingNotificationCriteriaSet	75
11.6.6	TpBindingNotificationCriteria	75
11.6.7	TpBindingNotificationCriteriaType	75

11.7	Units and Validations of Parameters	75
12	Exception Classes	76
Annex A (normative):	OMG IDL Description of Mobility SCF	77
Annex B (informative):	W3C WSDL Description of Mobility SCF.....	78
Annex C (informative):	Java API Description of the Mobility SCFs	79
Annex D (informative):	Contents of 3GPP OSA R7 Mobility	80
Annex E (informative):	Description of Mobility SCF for 3GPP2 cdma2000 networks	81
E.1	General Exceptions.....	81
E.2	Specific Exceptions	81
E.2.1	Clause 1: Scope	81
E.2.2	Clause 2: References	81
E.2.3	Clause 3: Definitions and abbreviations	81
E.2.4	Clause 4: Mobility SCF	81
E.2.5	Clause 5: Sequence Diagrams	81
E.2.6	Clause 6 Class Diagrams.....	81
E.2.7	Clause 7: The Service Interface Specifications	81
E.2.8	Clause 8: Mobility Interface Classes	82
E.2.9	Clause 9: State Transition Diagrams	82
E.2.10	Clause 10: Service Properties.....	82
E.2.11	Clause 11: Data Definitions.....	82
E.2.12	Clause 12: Exception Classes.....	82
E.2.13	Annex A (normative): OMG IDL Description of Mobility SCF.....	82
E.2.14	Annex B (informative): W3C WSDL Description of Mobility SCF.....	82
E.2.15	Annex C (informative): Java™ API Description of Mobility SCF	82
Annex F (informative):	Record of changes.....	83
F.1	Interfaces	83
F.1.1	New	83
F.1.2	Deprecated.....	83
F.1.3	Removed.....	83
F.2	Methods.....	83
F.2.1	New	83
F.2.2	Deprecated.....	83
F.2.3	Modified.....	84
F.2.4	Removed.....	84
F.3	Data Definitions	84
F.3.1	New	84
F.3.2	Modified.....	84
F.3.3	Removed.....	84
F.4	Service Properties.....	84
F.4.1	New	84
F.4.2	Deprecated.....	84
F.4.3	Modified.....	85
F.4.4	Removed.....	85
F.5	Exceptions	85
F.5.1	New	85
F.5.2	Modified.....	85
F.5.3	Removed.....	85
F.6	Others	85
History	86

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This ETSI Standard (ES) has been produced by ETSI Technical Committee Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN).

The present document is part 6 of a multi-part deliverable covering Open Service Access (OSA); Application Programming Interface (API), as identified below. The API specification (ES 204 915) is structured in the following parts:

- Part 1: "Overview";
- Part 2: "Common Data Definitions";
- Part 3: "Framework";
- Part 4: "Call Control";
- Part 5: "User Interaction SCF";
- Part 6: "Mobility SCF";**
- Part 7: "Terminal Capabilities SCF";
- Part 8: "Data Session Control SCF";
- Part 9: "Generic Messaging SCF";
- Part 10: "Connectivity Manager SCF";
- Part 11: "Account Management SCF";
- Part 12: "Charging SCF";
- Part 13: "Policy Management SCF";
- Part 14: "Presence and Availability Management SCF";
- Part 15: "Multi-Media Messaging SCF";
- Part 16: "Service Broker SCF".

The present document has been defined jointly between ETSI, The Parlay Group (<http://www.parlay.org>) and the 3GPP, in co-operation with a number of JAIN™ Community (<http://www.java.sun.com/products/jain>) member companies.

The present document forms part of the Parlay 6.0 set of specifications.

A subset of the present document is in 3GPP TS 29.198-6 V7.0.0 (Release 7).

1 Scope

The present document is part 6 of the Stage 3 specification for an Application Programming Interface (API) for Open Service Access (OSA).

The OSA specifications define an architecture that enables application developers to make use of network functionality through an open standardised interface, i.e. the OSA APIs.

The present document specifies the Mobility Service Capability Feature (SCF) aspects of the interface. All aspects of the Mobility SCF are defined here, these being:

- Sequence Diagrams.
- Class Diagrams.
- Interface specification plus detailed method descriptions.
- State Transition diagrams.
- Data Definitions.
- IDL Description of the interfaces.
- WSDL Description of the interfaces
- Reference to the Java™ API description of the interfaces.

The process by which this task is accomplished is through the use of object modelling techniques described by the Unified Modelling Language (UML).

2 References

The references listed in clause 2 of ES 204 915-1 contain provisions which, through reference in this text, constitute provisions of the present document.

ETSI ES 204 915-1: "Open Service Access (OSA); Application Programming Interface (API); Part 1: Overview (Parlay 6)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ES 204 915-1 apply.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in ES 204 915-1 apply.

4 Mobility SCF

The following clauses describe each aspect of the Mobility Service Capability Feature (SCF).

The order is as follows:

- The Sequence diagrams give the reader a practical idea of how each of the SCFs is implemented.
- The Class relationships clause shows how each of the interfaces applicable to the SCF, relate to one another.
- The Interface specification clause describes in detail each of the interfaces shown within the Class diagram part.
- The State Transition Diagrams (STD) show the transition between states in the SCF. The states and transitions are well-defined; either methods specified in the Interface specification or events occurring in the underlying networks cause state transitions.
- The Data Definitions clause shows a detailed expansion of each of the data types associated with the methods within the classes. Note that some data types are used in other methods and classes and are therefore defined within the Common Data types part ES 204 915-2.

4.1 General requirements on support of methods

An implementation of this API which supports or implements a method described in the present document, shall support or implement the functionality described for that method, for at least one valid set of values for the parameters of that method.

Where a method is not supported by an implementation of a Service interface, the exception P_METHOD_NOT_SUPPORTED shall be returned to any call of that method.


Where a method is not supported by an implementation of an Application interface, a call to that method shall be possible, and no exception shall be returned.

5 Sequence Diagrams

5.1 User Location Sequence Diagrams

5.1.1 User Location Interrogation - Triggered Request


The following sequence diagram shows how an application requests triggered location reports from the User Location service. When users location changes, the service reports this to the application.

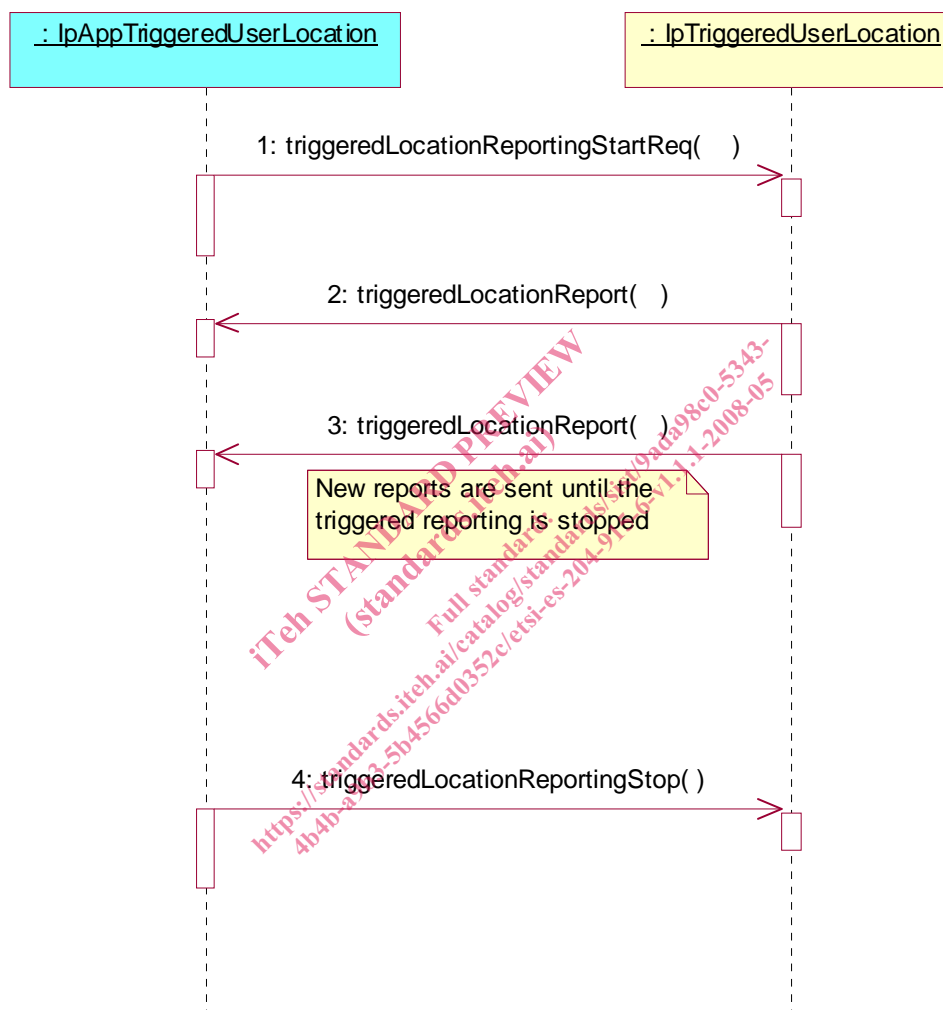

- 1: This message is used to start triggered location reporting for one or several users.
- 2: When the trigger condition is fulfilled then this message passes the location of the affected user to its callback object.
- 3: This is repeated until the application stops triggered location reporting (see next message).
- 4: This message is used to stop triggered location reporting.

5.1.2 User Location Interrogation - Periodic Request


The following sequence diagram shows how an application requests periodic location reports from the User Location service.

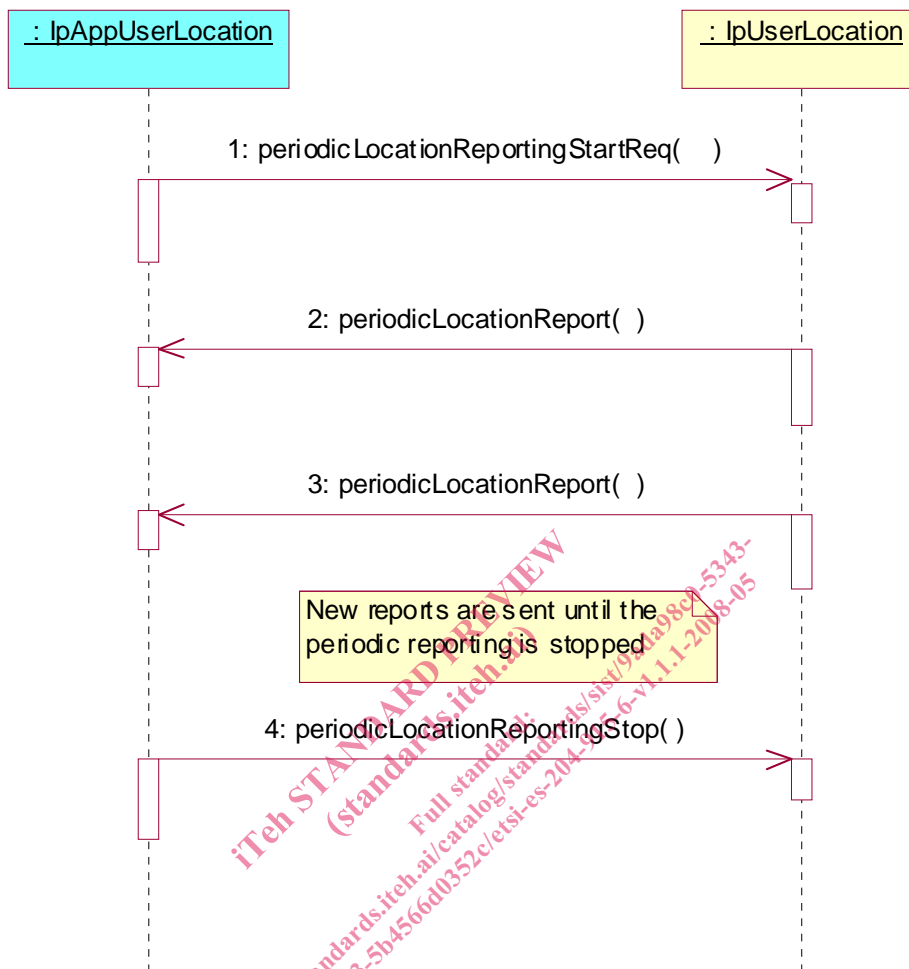

- 1: This message is used to start periodic location reporting for one or several users.
- 2: This message passes the location of one or several users to its callback object.
- 3: This message passes the location of one or several users to its callback object.
This is repeated at regular intervals until the application stops periodic location reporting (see next message).
- 4: This message is used to stop periodic location reporting.

5.1.3 User Location Interrogation - Interactive Request

The following sequence diagram shows how an application requests a location report from the User Location service.

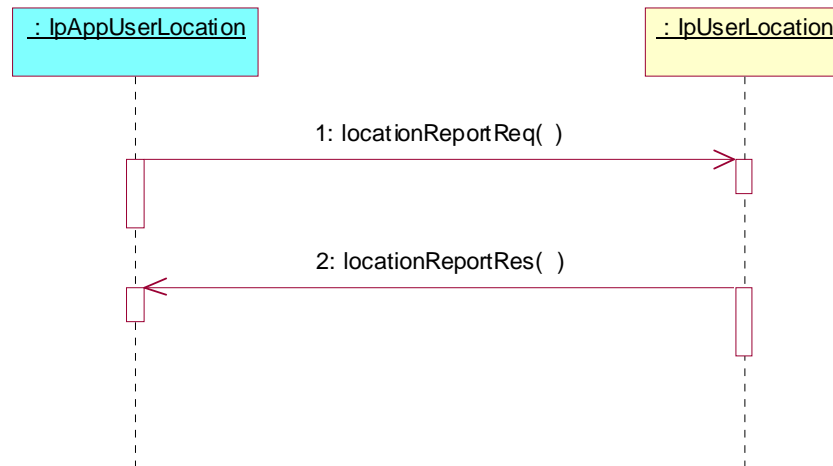

- 1: This message is used to request the location of one or several users.
- 2: This message passes the result of the location request for one or several users to its callback object.

ITeH STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/9ada98c0-5348-4b4b-a9b3-5b4566d0352c/etsi-es-204-915-6-v1.1.1-2008-05>