



SLOVENSKI STANDARD
SIST ISO/TR 10064-4:2002
01-julij-2002

JU'Ughj'ncVb]_]'Ga Yfb]W'nU'a Yf]hj Y'!'("XY.'Df]dcfc]UnU_cblfc`c`hY_gli fY
Vc_cj `ncV`b`g`_YbcyYb'U

Code of inspection practice -- Part 4: Recommendations relative to surface texture and tooth contact pattern checking

iTeh STANDARD PREVIEW

Code pratique de réception -- (Partie 4: Recommendations relatives à la rugosité de surface et au contrôle de la marque de portée

[SIST ISO/TR 10064-4:2002](https://standards.iteh.ai/catalog/standards/sist/5700e681-acaf-46ee-834a-0b005dd57b9/sist-iso-tr-10064-4-2002)

Ta slovenski standard je istoveten z: **ISO/TR 10064-4:1998**

ICS:

21.200 Gonila Gears

SIST ISO/TR 10064-4:2002 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO/TR 10064-4:2002](https://standards.iteh.ai/catalog/standards/sist/5700e681-acaf-46ee-834a-0b6b03dd57b9/sist-iso-tr-10064-4-2002)

<https://standards.iteh.ai/catalog/standards/sist/5700e681-acaf-46ee-834a-0b6b03dd57b9/sist-iso-tr-10064-4-2002>

TECHNICAL REPORT

ISO/TR 10064-4

First edition
1998-10-15

Cylindrical gears — Code of inspection practice

Part 4:

Recommendations relative to surface texture
and tooth contact pattern checking

iTeh STANDARD PREVIEW

(standards.iteh.ai)

Engrenages cylindriques — Code pratique de réception —

*Partie 4: Recommandations relatives à la rugosité de surface et au contrôle
de la marque de portée*

<https://standards.iteh.ai/en/standards/ISO/TR/10064-4:1998/5700e681-acaf-46ee-834a-0b6b03dd57b9/sist-iso-tr-10064-4-2002>



Reference number
ISO/TR 10064-4:1998(E)

ISO/TR 10064-4:1998(E)

Contents

	Page
Introduction.....	iv
1 Scope	1
2 References	1
3 Symbols and definitions	2
4 Surface texture	6
5 Functional considerations	7
6 Data given in drawings.....	8
7 Measuring instruments.....	8
8 Measurement of the surface roughness of gear tooth flanks.....	10
9 Inspection of tooth contact pattern.....	17
Annex A Controlling gear tooth alignment with contact patterns	21
Bibliography.....	25

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO/TR 10064-4:2002](https://standards.iteh.ai/catalog/standards/sist/5700e681-acaf-46ee-834a-0b6b03dd57b9/sist-iso-tr-10064-4-2002)

<https://standards.iteh.ai/catalog/standards/sist/5700e681-acaf-46ee-834a-0b6b03dd57b9/sist-iso-tr-10064-4-2002>

© ISO 1998

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet iso@iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The main task of technical committees is to prepare International Standards, but in exceptional circumstances a technical committee may propose the publication of a Technical Report of one of the following types:

- type 1, when the required support cannot be obtained for the publication of an International Standard, despite repeated efforts;
- type 2, when the subject is still under technical development or where for any other reason there is a future but not immediate possibility of an agreement on an International Standard;
- type 3, when a technical committee has collected data of a different kind from that which is normally published as an International Standard ("state of the art", for example).

Technical Reports of types 1 and 2 are subject to review within three years of publication to decide whether they can be transformed into International Standards. Technical Reports of type 3 do not necessarily have to be reviewed until the data they provide are considered to be no longer valid or useful.

ISO/TR 10064-4, which is a Technical Report of type 3, was prepared by Technical Committee ISO/TC 60, *Gears*.

ISO 10064 consists of the following parts, under the general title *Cylindrical gears — Code of inspection practice*:

- *Part 1: Inspection of corresponding flanks of gear teeth*
- *Part 2: Inspection related to radial composite deviations, runout, tooth thickness and backlash*
- *Part 3: Recommendations relative to gear blanks, shaft centre distance and parallelism of axes*
- *Part 4: Recommendations relative to surface texture and tooth contact pattern checking*

Introduction

In the course of revising ISO 1328:1975, it was decided that descriptions and numerical values relative to surface texture and tooth contact pattern checking should be published under separate cover as a Technical Report, type 3. For the general replacement of ISO 1328:1975, a system of documents as listed in clause 2 (References), together with this Technical Report, has been established.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ISO/TR 10064-4:2002](https://standards.iteh.ai/catalog/standards/sist/5700e681-acaf-46ee-834a-0b6b03dd57b9/sist-iso-tr-10064-4-2002)

<https://standards.iteh.ai/catalog/standards/sist/5700e681-acaf-46ee-834a-0b6b03dd57b9/sist-iso-tr-10064-4-2002>

Cylindrical gears — Code of inspection practice

Part 4:

Recommendations relative to surface texture and tooth contact pattern checking

1 Scope

This part of ISO/TR 10064 provides recommendations on measurement considerations for surface roughness and tooth contact pattern checking of gear flanks.

Numerical values given in this document are not to be regarded as strict ISO accuracy criteria, but may serve as a guide for mutual agreements, for steel or iron components.

(standards.iteh.ai)

2 References

[SIST ISO/TR 10064-4:2002](https://standards.iteh.ai/catalog/standards/sist/10064-4-2002)

ISO 53:1998, *Cylindrical gears for general and heavy engineering — Standard basic rack tooth profile.*

ISO 1302:1992, *Technical drawings — Methods of indicating surface texture.*

ISO 1328-1:1995, *Cylindrical gears — ISO System of accuracy — Part 1: Definitions and allowable values of deviations relevant to corresponding flanks of gear teeth.*

ISO 1328-2:1996, *Cylindrical gears — ISO System of accuracy — Part 2: Definitions and allowable values of deviations relevant to radial composite deviations and runout.*

ISO 3274:1996, *Geometrical Product Specifications (GPS) — Surface texture: Profile method — Nominal characteristics of contact (stylus) instruments.*

ISO 4287:1997, *Geometrical Product Specifications (GPS) — Surface texture: Profile method — Terms, definitions and surface texture parameters.*

ISO 4288:1996, *Geometrical Product Specifications (GPS) — Surface texture: Profile method — Rules and procedures for the assessment of surface texture.*

ISO 11562:1996, *Geometrical Product Specifications (GPS) — Surface texture: Profile method — Metrological characteristics of phase correct filters.*

ISO 13565-1:1996, *Geometrical Product Specifications (GPS) — Surface texture: Profile method; Surfaces having stratified functional properties — Part 1: Filtering and general measurement conditions.*

ISO 13565-2:1996, *Geometrical Product Specifications (GPS) — Surface texture: Profile method; Surfaces having stratified functional properties — Part 2: Height characterization using the linear material ratio curve.*

3 Symbols and definitions

3.1 Symbols

Symbols used for deviations of individual element measurements are composed of lower case letters, such as “*f*”, with subscripts, whereas symbols used for “total” deviations, which may represent combinations of several individual element deviations, are composed of capital letters, such as “*F*”, also with subscripts. Only symbols for quantities used in this part of ISO/TR 10064 are given in Table 1.

Table 1 — Symbols used within ISO/TR 10064-4

Symbol	Term	Units
$f_{w\beta}$	amplitude of undulation	μm
b_{c1}	larger length of contact pattern	%
b_{c2}	smaller length of contact pattern	%
h_{c1}	larger height of contact pattern	%
h_{c2}	smaller height of contact pattern	%
l_r	sampling length for roughness profile	mm
l_n	evaluation length (Default is normally $l_n = 5 \times l_r$ — see ISO 4287:1997, table C.2 and ISO 4288:1996, 4.4.)	mm
M_r	material length	mm
M_{r1} & M_{r2}	material portion	%
R_a	arithmetical mean deviation of the roughness profile	μm
R_k	core roughness depth	μm
R_{pk}	reduced peak height	—
R_{vk}	reduced valley depth	—
R_z	maximum height of the roughness profile (see ISO 4287)	μm
$Z(x)$	ordinate value	μm
λ	wavelength	mm
λ_c	wavelength cutoff (and short wave cut-off for waviness)	mm
λ_s	short wavelength cutoff for roughness	mm

3.2 Terms and definitions

3.2.1 General terms

3.2.1.1

surface lay

The direction of the predominant surface pattern (see Figure 1a).

NOTE Surface lay is ordinarily determined by the production method used.

3.2.1.2

roughness

The irregularities of the roughness profile (see 3.2.2.1). It is the component of surface texture inherent in the production process but excluding waviness and deviation of form.

3.2.1.3

waviness

The irregularities of the waviness profile (see 3.2.2.2). That component of surface texture upon which roughness is superimposed (see Figures 1a, 1b, 1c). In general, for machined gear tooth surfaces the waviness spacing is significantly greater than the roughness spacing.

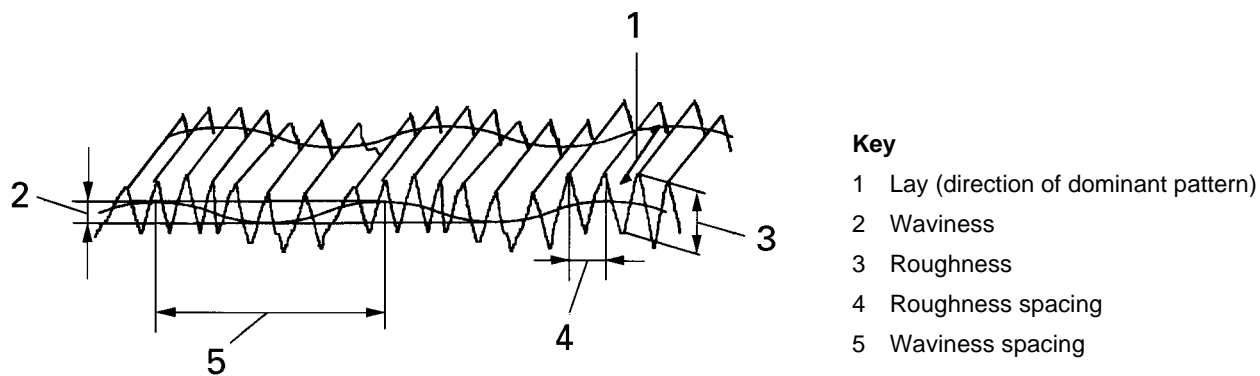


Figure 1a — Surface characteristics and terms

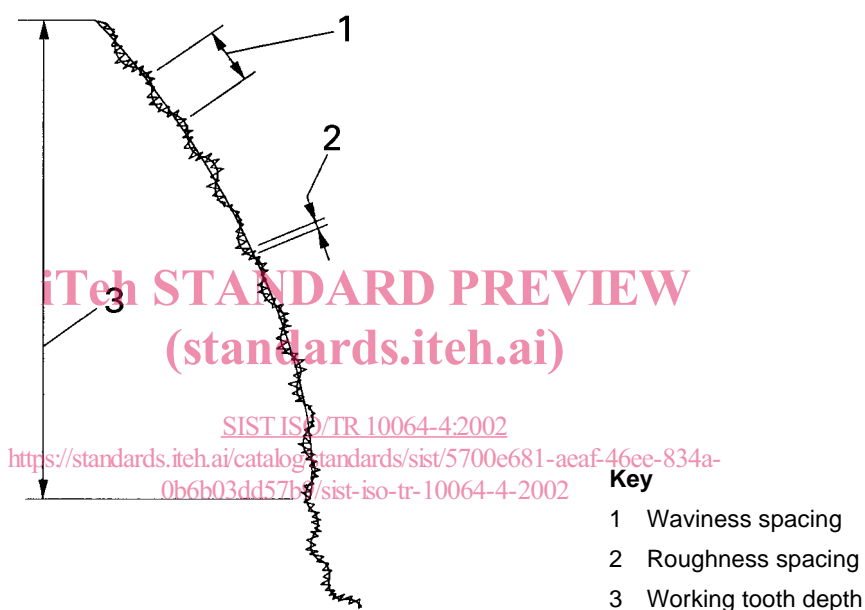


Figure 1b — Enlarged example of the surface texture profile of an involute tooth

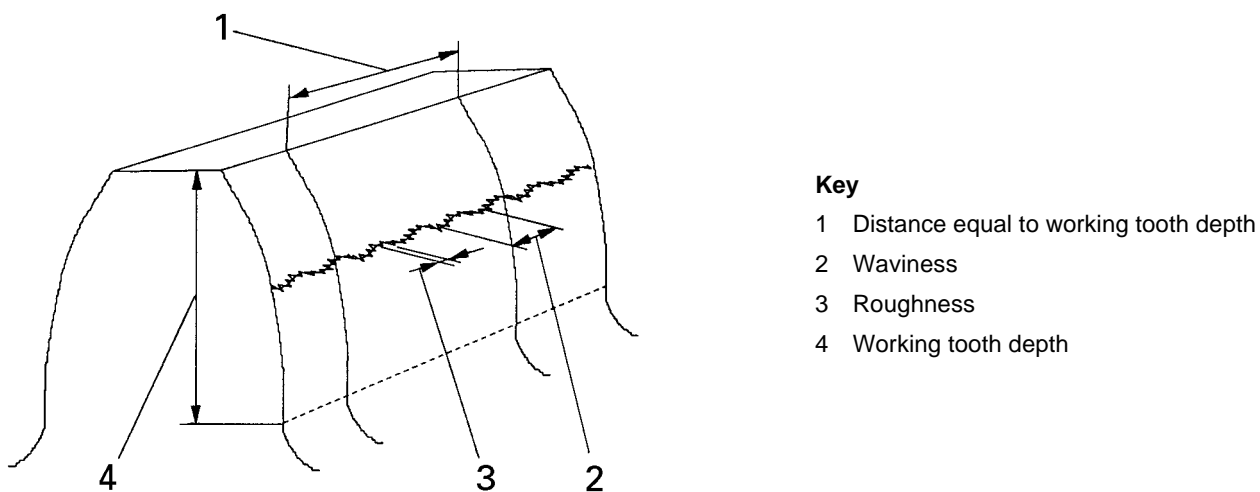


Figure 1c — Enlarged example of the surface texture profile along a tooth

3.2.2 Terms associated with the assessment of surface profile

3.2.2.1 roughness profile

The transmission band for roughness profiles is defined by the λ_c and λ_s profile filters (see ISO 11562:1996, clause 3), see Figure 1.

NOTE 1 The roughness profile is the basis for evaluation on the roughness profile parameters.

NOTE 2 The default relationship between λ_c and λ_s is given in ISO 11562:1996, clause 3.2.

3.2.2.2 waviness profile

The periodic part of the long wave component after the use of the profile filter λ_c .

3.2.2.3 mean line for the roughness profile

The mean line is the long wave profile component suppressed by the profile filter λ_c (see ISO 11562:1996, 3.2.1).

NOTE The mean line for the roughness profile is the reference line from which the profile ordinate $Z(x)$ is measured, see Figure 2.

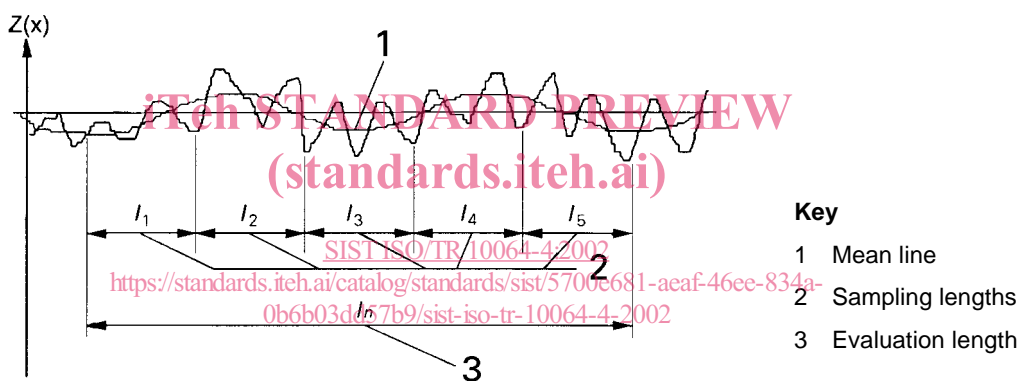


Figure 2 — Measurement lengths

3.2.2.4 ordinate value

The height of the assessed profile at any position x .

3.2.2.5 sampling length, l_r , for roughness

The length in the direction of the x -axis used for identifying the irregularities characterizing the profile under evaluation. The sampling length for roughness l_r is numerically equal to the characteristic wavelength of the profile filter λ_c (see ISO 4287).

3.2.2.6 evaluation length, l_n

The length in the direction of the x -axis used for assessing the profile under evaluation. The evaluation length may contain one or more sampling lengths (see ISO 4287).

3.2.2.7 cut-off wavelength, λ_c , of profile filters (phase, correct, gaussian)

The wave length of a sinusoidal profile of which 50% of the amplitude is transmitted by the profile filter (see ISO 11562).

3.2.2.8

cut-off ratio

The ratio of the long wave length characteristic cut-off to the short wave length characteristic cut-off of a given transmission band (see ISO 11562).

3.2.3 Terms related to surface roughness parameters

3.2.3.1

maximum heights of roughness profile, R_z

The sum of the height of the largest profile peak height, Z_p , and the largest profile valley depth, Z_v , within a sampling length (see ISO 4287:1997, 4.1.3 and Figure 9).

NOTE Usually this parameter is measured as a mean value of five adjacent sampling lengths. The evaluation length then consists of five sampling lengths (see Figure 3).

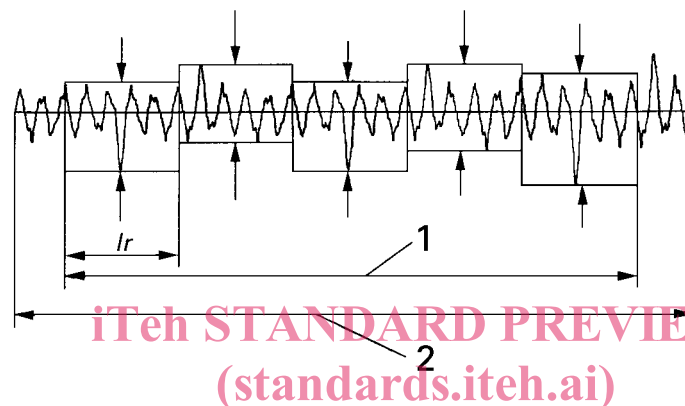


Figure 3 — Maximum height of roughness profile

SIST ISO/TR 10064-4:2002

<https://standards.iteh.ai/catalog/standards/sist/5700e681-acaf-46ce-834a-019103415700/sist/5700e681-acaf-46ce-834a-019103415700-10064-4-2002>

3.2.3.2

arithmetical mean deviations of the roughness profile, R_a

The arithmetical mean of the absolute ordinate values $Z(x)$ within a sampling length (see ISO 4287:1997, 4.2.1).

$$R_a = \frac{1}{l_r} \int_0^{l_r} |z(x)| dx \quad (1)$$

where

l_r is the sampling length for R_a ;

$Z(x)$, Z_i are the ordinate values.

NOTE The arithmetical mean deviation, R_a , is determined by an evaluation length of five adjacent sampling lengths (see Figure 4 and ISO 4288).

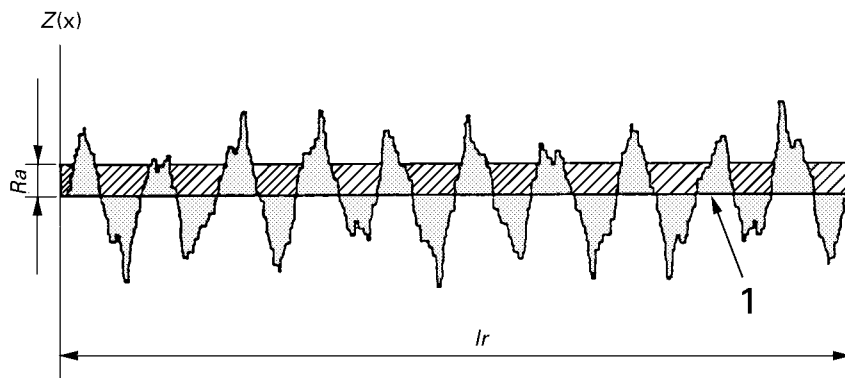


Figure 4 — Arithmetic mean deviation of the roughness profile, R_a

3.2.4

gear tooth undulations

Undulations are periodic waviness in a tooth surface. A special form of undulations meets the following criteria:

- the lay is approximately parallel to the lines of contact (with the mating gear);
- the number of waves projected on a pitch circle (in a plane of rotation) is an integer, see Figure 5;
- they are a likely cause of noise.

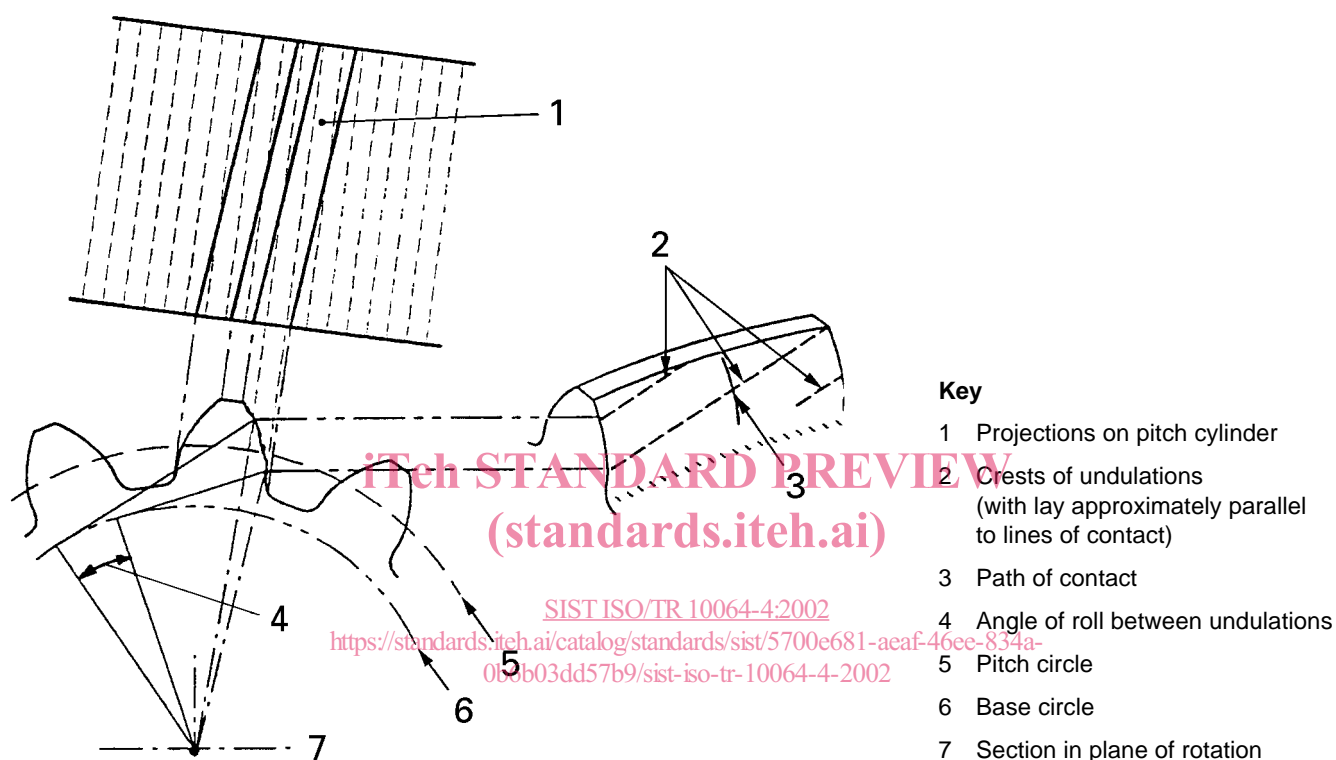


Figure 5 — Undulations in a helical gear

4 Surface texture

Experimental investigations and service experience indicate that a relationship exists between grades of surface texture and aspects of gear load capacity. The influence of surface roughness on the pitting resistance and bending strength of gear teeth is addressed in ISO 6336, Parts 2 and 3 respectively; its influence on scuffing is discussed in ISO/TR 13989.

As well as roughness, waviness and other features of surface texture can influence the surface fatigue resistance of materials. Because of this, it is prudent to make an unfiltered profile recording of the surface texture of the teeth of gears when high standards of performance and reliability are demanded.

In this Technical Report no recommendations are made concerning the grades of surface roughness, waviness and form or type of lay suitable for specific purposes, nor are causes of such irregularities identified.

CAUTION It is strongly recommended that before prescribing limits for features of the surface texture of gear teeth, designers of gears and gear engineers should familiarize themselves with ISO standards and other literature on the subject. See references in clause 2.