

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Secondary cells and batteries containing alkaline or other non-acid electrolytes
– Sealed nickel-metal hydride cells and batteries for use in industrial
applications –
Part 1: Performance**

IEC 63115-1:2020

**Accumulateurs alcalins et autres accumulateurs à électrolyte non acide –
Accumulateurs étanches au nickel-métal hydrure destinés à l'utilisation dans les
applications industrielles –
Partie 1: Performances**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2022 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC - webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 300 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 19 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.



IEC 63115-1

Edition 1.1 2022-11
CONSOLIDATED VERSION

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Secondary cells and batteries containing alkaline or other non-acid electrolytes
– Sealed nickel-metal hydride cells and batteries for use in industrial
applications –
Part 1: Performance**

IEC 63115-1:2020

**Accumulateurs alcalins et autres accumulateurs à électrolyte non acide –
Accumulateurs étanches au nickel-métal hydrure destinés à l'utilisation dans
les applications industrielles –
Partie 1: Performances**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 29.220.30

ISBN 978-2-8322-6046-3

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

REDLINE VERSION

VERSION REDLINE



**Secondary cells and batteries containing alkaline or other non-acid electrolytes
– Sealed nickel-metal hydride cells and batteries for use in industrial
applications –
Part 1: Performance**

IEC 63115-1:2020

**Accumulateurs alcalins et autres accumulateurs à électrolyte non acide –
Accumulateurs étanches au nickel-métal hydrure destinés à l'utilisation dans les
applications industrielles –
Partie 1: Performances**

CONTENTS

FOREWORD	4
1 Scope	6
2 Normative references	6
3 Terms and definitions	7
4 Parameter measurement tolerances	8
5 Marking and designation	9
5.1 Marking	9
5.2 Cell and monobloc designation	9
5.3 Module, battery pack and battery system designation	10
6 Dimensions	11
6.1 Cylindrical cell	11
6.2 Prismatic cell and monobloc	11
6.3 Module, battery pack and battery system	12
7 Electrical tests	12
7.1 General	12
7.2 Charging procedure for test purposes	13
7.3 Discharge performance	13
7.3.1 Discharge performance at 20 °C	13
7.3.2 Discharge performance at 5 °C	14
7.3.3 Discharge performance at –18 °C	15
7.4 Charge (capacity) retention and recovery	15
7.4.1 General	15
7.4.2 Test method	15
7.4.3 Acceptance criterion	16
7.5 Endurance in cycles	16
7.5.1 General	16
7.5.2 Test method	16
7.5.3 Acceptance criterion	17
7.6 Internal resistance	17
7.6.1 General	17
7.6.2 Measurement of the internal AC resistance	18
7.6.3 Measurement of the internal DC resistance	18
7.7 Storage	19
8 Type test conditions	19
8.1 General	19
8.2 Sample size	19
8.3 Conditions for type approval	22
8.3.1 Dimensions	22
8.3.2 Electrical tests	22
Annex A (informative) Battery structure information	23
A.1 Example 1	23
A.2 Example 2	23
A.3 Example 3	23
A.4 Example 4	24
A.5 Example 5	24

A.6	Example 6.....	25
A.7	Example 7.....	25
A.8	Example 8.....	26
A.9	Example 9.....	27
	Bibliography.....	28
	Figure 1 – Examples of maximum dimensions of a cylindrical cell.....	11
	Figure 2 – Examples of maximum dimensions of a prismatic cell and monobloc.....	12
	Figure 3 – Test sequence	21
	Figure A.1 – Structure 3S	23
	Figure A.2 – Structure 2P	23
	Figure A.3 – Structure 3S2P	23
	Figure A.4 – Structure 2P4S	24
	Figure A.5 – Structure 2P4S3P	24
	Figure A.6 – Structure (2P4S)3P.....	25
	Figure A.7 – Structure (3S2P)3P.....	25
	Figure A.8 – Structure (5S)4S.....	26
	Figure A.9 – Structure ((3S2P)3P)2S.....	27
	Table 1 – Marking per item type.....	9
	Table 2 – Discharge performance at 20 °C ± 5 °C.....	14
	Table 3 – Discharge performance at 5 °C ± 5 °C.....	14
	Table 4 – Discharge performance at -18 °C ± 5 °C.....	15
	Table 5 – Endurance test in cycles	17
	Table 6 – Discharge current applied during the measurement of the internal DC resistance.....	18
	Table 7 – Sample size for type tests	20

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**SECONDARY CELLS AND BATTERIES CONTAINING
ALKALINE OR OTHER NON-ACID ELECTROLYTES –
SEALED NICKEL-METAL HYDRIDE CELLS AND
BATTERIES FOR USE IN INDUSTRIAL APPLICATIONS –****Part 1: Performance****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 63115-1 edition 1.1 contains the first edition (2020-01) [documents 21A/716/FDIS and 21A/720/RVD] and its amendment 1 (2022-11) [documents 21A/811/FDIS and 21A/820/RVD].

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.

International Standard IEC 63115-1 has been prepared by subcommittee 21A: Secondary cells and batteries containing alkaline or other non-acid electrolytes, of IEC technical committee 21: Secondary cells and batteries.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 63115, published under the general title *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Sealed nickel-metal hydride cells and batteries for use in industrial applications*, can be found on the IEC website.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under webstore.iec.ch in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

(standards.iteh.ai)

[IEC 63115-1:2020](https://standards.iteh.ai/catalog/standards/sist/6a18962e-48b4-438e-8efd-b5d759246654/iec-63115-1-2020)

<https://standards.iteh.ai/catalog/standards/sist/6a18962e-48b4-438e-8efd-b5d759246654/iec-63115-1-2020>

SECONDARY CELLS AND BATTERIES CONTAINING ALKALINE OR OTHER NON-ACID ELECTROLYTES – SEALED NICKEL-METAL HYDRIDE CELLS AND BATTERIES FOR USE IN INDUSTRIAL APPLICATIONS –

Part 1: Performance

1 Scope

This document specifies the marking, designation, tests and requirements for sealed nickel-metal hydride cells and batteries used in industrial applications, including stationary applications.

When an IEC International Standard specifying test conditions and requirements for cells used in special applications is in conflict with this document, the former takes precedence (e.g. IEC 62675).

The following are some examples of applications that utilize the cells and batteries falling under the scope of this document.

- Stationary applications: telecom, uninterruptible power supplies (UPS), electrical energy storage system, utility switching, emergency power and similar applications.
- Motive applications: fork-lift truck, golf cart, AGV (Automatic Guided Vehicle), railway, and marine, excluding road vehicles.

Since this document covers batteries for various industrial applications, it includes those requirements that are common and minimum to the various applications.

This document applies to cells and batteries. If the battery is divided into smaller units, the smaller unit can be tested as representative of the battery. The manufacturer clearly declares the tested unit. The manufacturer can add functions to the tested unit that are present in the final battery.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-482:2004, *International Electrotechnical Vocabulary (IEV) – Part 482: Primary and Secondary cells and batteries*

IEC 61434:1996, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Guide to the designation of current in alkaline secondary cell and battery standards*

IEC 62675:2014, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Sealed nickel-metal hydride prismatic rechargeable single cells*

ISO/IEC Guide 51, *Safety aspects – Guidelines for their inclusion in standards*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-482, ISO/IEC Guide 51, and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

cell

sealed nickel metal hydride cell

cell containing a nickel hydroxide compound for the positive electrode, a hydrogen absorbing alloy for the negative electrode, and potassium hydroxide or other alkaline solution as electrolyte, and not releasing either gas or liquid when operated within the limits specified by the manufacturer

Note 1 to entry: A sealed cell may be equipped with a safety device to prevent a dangerously high internal pressure and is designed to operate during its life in its original sealed state. See IEC 60050-482:2004, 482-05-17.

3.2

monobloc

battery with multiple separate but electrically connected cell compartments each of which is designed to house an assembly of electrodes, electrolyte, terminals or interconnections and possible separators

[SOURCE: IEC 60050-482:2004, 482-02-17, modified – "battery" has been omitted from the term and the note to entry deleted.]

3.3

module ,<for cells>

group of cells connected together either in series and/or parallel configuration with or without protective devices (e.g. fuse or PTC) and monitoring circuitry

3.4

battery pack

energy storage device comprised of one or more cells, monoblocs or modules electrically connected

Note 1 to entry: A battery pack may have a monitoring circuitry which provides information (e.g. cell voltage) to a battery system.

3.5

battery system

battery

system which comprises one or more cells, cell blocks, monoblocs, modules or battery packs

Note 1 to entry: The battery system has a battery management system to cut off current in case of overcharge, overcurrent, overdischarge, or overheating.

Note 2 to entry: Overdischarge cut off is not mandatory if there is an agreement on this between the cell manufacturer and the customer.

Note 3 to entry: The battery system may have cooling or heating units.

Note 4 to entry: The battery system may be enclosed in a battery box.

3.6 battery management system BMS

electronic system associated with a battery which has functions to cut off in case of overcharge, overcurrent, overdischarge, or overheating

Note 1 to entry: The BMS monitors and/or manages its state, calculates secondary data, reports that data and/or controls its environment to influence the battery's safety, performance and/or service life.

Note 2 to entry: The BMS is sometimes also referred to as a BMU (battery management unit).

Note 3 to entry: This note applies to the French language only.

3.7 final voltage

specified voltage of a battery at which the battery discharge is terminated

[SOURCE: IEC 60050-482:2004, 482-03-30, modified – The synonyms "end-of-discharge voltage", "cut-off voltage" and "end-point voltage" have been omitted.]

3.8 nominal voltage

suitable approximate value of the voltage used to designate or identify the voltage of a cell or battery

Note 1 to entry: The nominal voltage of a sealed nickel-metal hydride single cell is 1,2 V.

Note 2 to entry: The nominal voltage of a battery of n series connected cells is equal to n times the nominal voltage of a single cell.

[SOURCE: IEC 60050-482:2004, 482-03-31, modified – The words "the voltage of" have been added; the notes to entry have been added and the reference to electrochemical systems has been omitted.]

3.9 rated capacity

capacity value of a cell or battery determined under specified conditions and declared by the manufacturer

Note 1 to entry: The rated capacity is the quantity of electricity C_5 Ah (ampere-hours) declared by the manufacturer which a cell or battery can deliver during a 5 h period when charging, storing and discharging under the conditions specified in 7.3.1.

[SOURCE: IEC 60050-482:2004, 482-03-15, modified – "cell" has been added to the definition, along with a note to entry.]

4 Parameter measurement tolerances

The overall accuracy of controlled or measured values, relative to the specified or actual values, shall be within the following tolerances:

- a) $\pm 1 \%$ for voltage;
- b) $\pm 1 \%$ for current;
- c) $\pm 1 \%$ for capacity;
- d) $\pm 2 \text{ }^\circ\text{C}$ for temperature;
- e) $\pm 0,1 \%$ for time.

These tolerances comprise the combined accuracy of the measuring instruments, the measurement techniques used and all other sources of error in the test procedure.

The details of the instrumentation used shall be provided in each report of results.

5 Marking and designation

5.1 Marking

The marking information per item is shown in Table 1. Each part that is installed or maintained shall carry clear and durable markings giving the specified information.

If there are designations on a battery system, battery pack or module and if full traceability of all parts can be ensured by the battery system manufacturer, designations are not necessary on inner parts. This applies only to battery systems maintained at the battery system manufacturer's location.

However, for a transportable unit (i.e. a unit that is being shipped), it is necessary to provide the marking information on the main transportable unit. Furthermore, if there is an arrangement between the purchaser and the manufacturer as regards marking, the unit shall comply with that arrangement.

Table 1 – Marking per item type

Marking information	Cell or monobloc	Module or battery pack	Battery system
Secondary sealed nickel-metal hydride battery or Ni-MH	R	R	R
Polarity	R	R	R
Date of manufacture (which may be in code)	R	R	R
Name or identification of manufacturer or supplier	R	R	R
Rated capacity	R	R	R
Nominal voltage	R	R	R
Appropriate warning statement (including disposal instruction)	R	R	R
Cell designation as specified in 5.2	R	--	--
Battery structure as specified in 5.3	--	R	R
NOTE "R" = required; "--" = unnecessary or not applicable			

5.2 Cell and monobloc designation

Sealed nickel-metal hydride cells and monoblocs shall be designated with following form:

$$HA_1N_1S_1A_2$$

where

A_1 designates the shape of the cell or monobloc in which:

- R is cylindrical;
- P is prismatic.

A_2 designates the rate capability of the cell in which:

- L is a low rate of discharge type;
- M is a medium rate of discharge type;
- H is a high rate of discharge type;
- X is a very high rate of discharge type.

NOTE These cells are typically but not exclusively used for the following discharge rates:

- L up to 0,5 $I_t A$,
- M up to 3,5 $I_t A$,
- H up to 7,0 $I_t A$,
- X over 7,0 $I_t A$.

N_1 is the group of figures indicative of the rated capacity of the cell, regardless whether a cell or monobloc is being marked per Table 1 – Marking per item type.

S_1 is the monobloc structure formulation (in the case of a cell, S_1 is not shown):

- a) it describes the number of cells in the minimum constitutive entity and on the right side of the number, it describes their connection mode in series (S) or in parallel (P).

See Clause A.1 and Clause A.2 in Annex A.

- b) in the event that the minimum constitutive entities are connected in series or in parallel, it describes the number of minimum constitutive entities, and on the right side of the number, it describes their connection mode in series (S) or in parallel (P).

See Clause A.3 and Clause A.4 in Annex A.

EXAMPLE 1 "HR75H" would designate a cylindrical sealed nickel-metal hydride cell. Its rated capacity is 75 Ah. It is designed for high discharge rate.

EXAMPLE 2 "HP95M" would designate a prismatic sealed nickel-metal hydride cell. Its rated capacity is 95 Ah. It is designed for medium discharge rate.

EXAMPLE 3 "HP34[2P5S]H" would designate a monobloc composed of 5S connected prismatic sealed nickel-metal hydride 2P cells. Its rated capacity is 68 Ah. It is designed for high discharge rate.

EXAMPLE 4 "HP100[10S]L" would designate a battery composed of 10S connected prismatic sealed nickel-metal hydride monobloc. Its rated capacity is 100 Ah. It is designed for low discharge rate.

5.3 Module, battery pack and battery system designation

Sealed nickel-metal hydride modules, battery packs and battery systems shall be designated with the following form:

$$HA_1 T_1 N_1 S_2 A_2$$

where

T_1 designates the item type of Table 1 in which:

- O is module, in this case N_1 is cell capacity;
- Q is battery pack, in this case N_1 is battery pack capacity;
- Y is battery system, in this case N_1 is battery system capacity.

S_2 is the battery structure formulation.

The battery designation should include the breakdown structure of the battery. The descriptive path followed to formulate the battery is from the smallest entity to the largest one:

- a) refer to 5.2;

~~b) refer to 5.3;~~

e) b) in the case of larger constitutive entities, the battery designation describes the symbols on the right side of the number in the same way as mentioned ~~above~~ in 5.2 a) and 5.2 b).

~~When some constitutive entities can be separated for ease of handling or transportation, these entities can be distinguished from other entities by bracketing.~~

Some examples are shown in Clause A.6 to Clause A.9 of Annex A.

EXAMPLE 1 "HRO75H" would designate a cylindrical sealed nickel-metal hydride module. Its rated capacity is 75 Ah. It is designed for a high discharge rate.


EXAMPLE 2 "HPY34[(10S)68S]H" would designate a prismatic sealed nickel-metal hydride battery system. Its rated capacity is 34 Ah. It is designed for a high discharge rate.

EXAMPLE 3 "HRO540[6P4S]L" would designate a module composed of 4S connected cylindrical sealed nickel-metal hydride 6P cells. Its rated capacity is 540 Ah as it comprises a 6P, 90 Ah capacity cell. It is designed for a low discharge rate.

6 Dimensions

6.1 Cylindrical cell

There are no monoblocs with a cylindrical cell. See Figure 1 for examples of maximum dimensions.

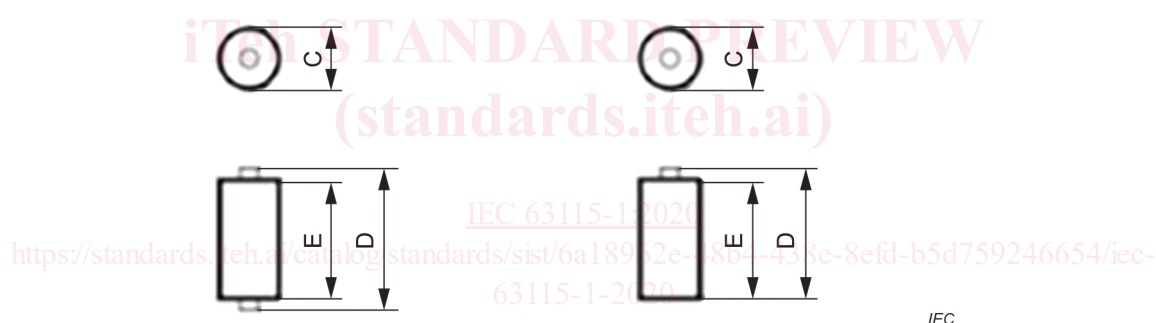

Key

- A total width
- B total thickness
- C diameter
- D total length (including terminals)
- E total length (excluding terminals)

Figure 1 – Examples of maximum dimensions of a cylindrical cell

6.2 Prismatic cell and monobloc

Refer to IEC 62675:2014, Clause 6. See Figure 2 for examples of maximum dimensions.