



SLOVENSKI STANDARD
SIST EN 12323:2005

01-september-2005

BUXca Yý U
SIST EN 12323:2003

Tehnologije AIDC – Simbološke specifikacije – "Kod 16K"

AIDC technologies - Symbology specifications - Code 16K

AutoID-Technologien - Symbologiespezifikationen - Code 16K

(standards.iteh.ai)

Code a barres - Spécifications des symbologies - Code 16K

[SIST EN 12323:2005](#)

<https://standards.iteh.ai/catalog/standards/sist/09eecd8c-2c63-4ec0-91b1-78a/sist-en-12323-2005>

Ta slovenski standard je istoveten z: EN 12323:2005

ICS:

35.040

Nabori znakov in kodiranje
informacij

Character sets and
information coding

SIST EN 12323:2005

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 12323:2005](https://standards.iteh.ai/catalog/standards/sist/09eecd8c-2c63-4ec0-91b1-c6fb02b4378a/sist-en-12323-2005)

<https://standards.iteh.ai/catalog/standards/sist/09eecd8c-2c63-4ec0-91b1-c6fb02b4378a/sist-en-12323-2005>

EUROPEAN STANDARD

EN 12323

NORME EUROPÉENNE

EUROPÄISCHE NORM

May 2005

ICS 35.040

Supersedes EN 12323:1998

English version

AIDC technologies - Symbology specifications - Code 16KCode à barres - Spécifications des symbologies - Code
16KAutoID-Technologien - Symbologiespezifikationen - Code
16K

This European Standard was approved by CEN on 21 March 2005.

CEN members are bound to comply with the CEN/GENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

ITIH STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 12323:2005
<https://standards.iteh.ai/catalog/standards/sist/09eecd8c-2c63-4ec0-91b1-c6fb02b4378a/sist-en-12323-2005>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

	Page
Foreword	3
Introduction	4
1 Scope	5
2 Normative references	5
3 Terms and definitions	5
4 Requirements	6
4.1 Symbology characteristics.....	6
4.2 Symbol structure.....	7
4.3 Character assignments.....	8
4.3.1 Symbol character encodation.....	8
4.3.2 Data character encodation	8
4.3.3 Code sets.....	9
4.3.4 Special characters	11
4.3.5 Start and stop characters	12
4.3.6 Check characters.....	13
4.3.7 Separator bars	14
4.4 Transmitted data.....	14
4.5 Dimensions.....	14
4.6 Reference decode algorithm	14
4.6.1 Introduction.....	14
4.6.2 Start and stop characters	15
4.6.3 Symbol characters.....	15
4.6.4 Symbol decode.....	16
4.6.5 Message decode	16
4.6.6 Additional checks.....	16
4.7 User-defined application parameters	17
4.7.1 Introduction.....	17
4.7.2 Symbology and dimensional characteristics	17
4.7.3 Optical specifications.....	17
4.7.4 Test specifications	17
Annex A (normative) Symbol check characters	19
Annex B (normative) Special considerations relating to the use of Function Code 1 (FNC1)	21
Annex C (normative) Using two or more "Code 16K" symbols to distribute longer data messages	22
Annex D (normative) Transmitted data	25
Annex E (normative) Symbology identifiers	26
Annex F (informative) Use of mode, code and shift characters to minimize symbol size	27
Annex G (informative) Relationship of symbol character value to ASCII Value	28
Annex H (informative) Guidelines for the use of "Code 16K"	29
Bibliography	30

Foreword

This document (EN 12323:2005) has been prepared by Technical Committee CEN/TC 225 "AIDC Technologies", the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2005, and conflicting national standards shall be withdrawn at the latest by November 2005.

This document supersedes EN 12323:1998.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 12323:2005](#)

<https://standards.iteh.ai/catalog/standards/sist/09eecd8c-2c63-4ec0-91b1-c6fb02b4378a/sist-en-12323-2005>

EN 12323:2005 (E)**Introduction**

The technology of bar coding is based on the recognition of patterns encoded in bars and spaces of defined dimensions. There are a number of methods of encoding information in bar code form, known as symbologies, and the rules defining the translation of characters into bar and space patterns and other essential features are known as the symbology specifications. "Code 16K" is one such symbology.

Previously, symbology specifications have been developed and published by a number of different private organisations, resulting in certain instances in conflicting requirements for certain symbologies.

Manufacturers of bar code equipment and users of bar code technology require publicly available standard symbology specifications to which they can refer when developing equipment and application standards.

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST EN 12323:2005](https://standards.iteh.ai/catalog/standards/sist/09eecd8c-2c63-4ec0-91b1-c6fb02b4378a/sist-en-12323-2005)

<https://standards.iteh.ai/catalog/standards/sist/09eecd8c-2c63-4ec0-91b1-c6fb02b4378a/sist-en-12323-2005>

1 Scope

This document:

- specifies the requirements for the multi row bar code symbology known as "Code 16K";
- specifies "Code 16K" symbology characteristics, data character encodation, dimensions, tolerances, decoding algorithms and user-defined application parameters;
- describes a subset of "Code 16K" assigned to EAN International.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 1556:1998, *Bar coding — Terminology*

EN ISO/IEC 15416, *Information technology — Automatic identification and data capture techniques — Bar code print quality test specification — Linear symbols (ISO/IEC 15416:2000)*

ISO/IEC 646:1991, *Information technology — ISO 7-bit coded character set for information interchange*

ISO/IEC 8859-1:1998, *Information technology — 8-bit single-byte coded graphic character sets — Part 1: Latin alphabet No. 1*

ISO/IEC 15424, *Information technology — Automatic identification and data capture techniques — Data Carrier Identifiers (including Symbology Identifiers)*

EAN•UCC *General Specifications (EAN International, Brussels)*

3 Terms and definitions

For the purposes of this European Standard, the terms and definitions given in EN 1556:1998 and the following apply.

3.1

guard bar

additional bar used to separate the trailing space of a start character from the leading space of the first symbol character in a row

3.2

mode character

symbol character in the first position after the start character in the first row of a symbol, used to define the initial code set and any implied special characters

3.3

separator bar

horizontal bar separating two rows of a symbol or abutting the top or bottom of the first or last row respectively

EN 12323:2005 (E)**4 Requirements****4.1 Symbology characteristics**

The characteristics of "Code 16K" are:

a) encodable character set:

- 1) all 128 ASCII characters, i.e. ASCII characters 0 to 127 inclusive, in accordance with ISO/IEC 646:1991;
- 2) characters with ASCII values 128 to 255 in accordance with ISO 8859-1:1998 may also be encoded. See 4.3.4.4 d);
- 3) 4 non data function characters;
- 4) 3 code set selection characters;
- 5) 7 shift characters;
- 6) 8 start characters;
- 7) 8 stop characters;
- 8) 1 pad character;

iTeh STANDARD PREVIEW
(standards.iteh.ai)

b) code type: continuous, multi row;

c) elements per symbol character: 6, comprising 3 spaces and 3 bars, each of 1, 2, 3 or 4 modules in width;

d) character self-checking: yes;

e) row self-checking: yes;

f) symbol width: 81X inclusive of minimum quiet zones;

g) symbol height: variable (2 to 16 rows);

h) bidirectional decoding: yes;

i) number of symbol check characters: 2, mandatory (see Annex A);

j) symbol character density: 11 modules per symbol character representing data (equivalent to 5,5 modules per data character in code set C);

k) representative data capacity: 2 row symbol: 7 ASCII characters, 14 numeric characters;

l) maximum data capacity 16 row symbol: 77 ASCII characters, 154 numeric characters;

m) non-data overhead:

per row: 15 modules;

per symbol: 33 modules minimum, 81 modules maximum.

4.2 Symbol structure

Each "Code 16K" symbol consists of 2 to 16 rows. Each row shall comprise:

- leading quiet zone;
- start character;
- 1X guard bar (where X is the nominal width of a narrow bar or space);
- 5 symbol characters;
- 1 stop character;
- trailing quiet zone.

Figure 1 illustrates the row structure. Rows shall be separated from each other by a horizontal separator bar. The top and bottom of the symbol shall also have separator bars which shall extend to the ends of the quiet zones.

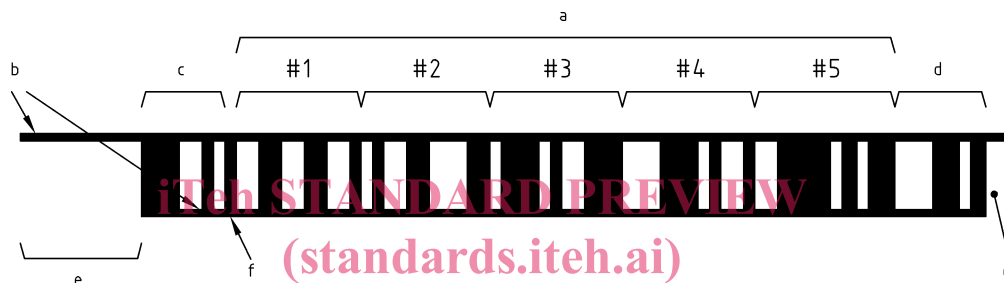


Figure 1 – "Code 16K" row structure
<https://standards.iteh.ai/catalog/standards/sist/09eecd8c-2c63-4ec0-91b1-c6fb02b4378e/sist-en-12323-2005>

Figure 2 shows the structure of a full 16-row symbol. The symbol characters are ordered from the leftmost character of the first (top) row, through each row left to right to the rightmost character in the last (bottom) row. The first symbol character is the "mode" character S. The last two characters are the check characters C1 and C2. The remaining symbol characters encode the data for the symbol.

S	D1	D2	D3	D4
D5	D6	D7	D8	D9
D10	D11	D12	D13	D14
D15	D16	D17	D18	D19
D20	D21	D22	D23	D24
D25	D26	D27	D28	D29
D30	D31	D32	D33	D34
D35	D36	D37	D38	D39
D40	D41	D42	D43	D44
D45	D46	D47	D48	D49
D50	D51	D52	D53	D54
D55	D56	D57	D58	D59
D60	D61	D62	D63	D64
D65	D66	D67	D68	D69
D70	D71	D72	D73	D74
D75	D76	D77	C1	C2

Figure 2 – "Code 16K" symbol structure

EN 12323:2005 (E)

Figure 3 illustrates a complete symbol encoding the data "ab0123456789" in "Code 16K".



Figure 3 – "Code 16k" symbol encoding "ab0123456789"

4.3 Character assignments

4.3.1 Symbol character encodation

There are 107 "Code 16K" symbol characters. Each symbol character consists of eleven 1X-wide modules. Each symbol character consists of three space elements alternating with three bar elements, starting with a space. Each bar or space element may consist of 1 to 4 modules.

Table 1 defines all the "Code 16K" character assignments. In the column headed 'Symbol Character Structure' the numeric value represent the widths of the elements in modules or multiples of the X dimension.

Symbol character parity is defined by the sum of the bar modules in any symbol character. In "Code 16K" this sum shall always be odd (odd parity). This odd parity feature enables character self-checking to be carried out. Figure 4 illustrates the symbol character value 33.



Figure 4 – Symbol character value 33

4.3.2 Data character encodation

"Code 16K" has three unique data character sets, shown in Table 1 as code sets A, B and C. The symbol character bar and space patterns shown are equivalent to the data characters listed in the columns for code A, B or C. The choice of data character set depends on the mode character (starting symbol character), or the use of code set A, code set B or code set C characters or the shift characters. The code set can be redefined within the symbol by the use of code set or shift characters.

The same data may be represented by different "Code 16K" symbol characters, through the use of different combinations of mode, code set or shift characters. Annex F contains guidelines to generate the smallest symbol for given data. An application need not specify the code set to be used.

Each symbol character is assigned a numeric value listed in Table 1. This value is used in calculating the check characters C1 and C2. It may also be used to provide a conversion to and from ASCII decimal values when encoding in code sets A and B (see Annex G).

4.3.3 Code sets

4.3.3.1 Code set A

Code set A includes all of the standard upper case alphanumeric characters together with the control characters (i.e. characters with ASCII values from 00 to 95 inclusive), and eleven special characters.

4.3.3.2 Code set B

Code set B includes all of the standard upper case alphanumeric characters together with the lower case alphabetic characters (i.e. characters with ASCII values from 32 to 127 inclusive), and eleven special characters.

4.3.3.3 Code set C

Code set C includes the set of 100 digit pairs from 00 to 99 inclusive, as well as seven special characters. This allows numeric data to be encoded, two data digits per symbol character, at effectively twice the density of standard data.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 12323:2005](https://standards.iteh.ai/catalog/standards/sist/09eecd8c-2c63-4ec0-91b1-c6fb02b4378a/sist-en-12323-2005)

<https://standards.iteh.ai/catalog/standards/sist/09eecd8c-2c63-4ec0-91b1-c6fb02b4378a/sist-en-12323-2005>

Table 1 – "Code 16K" character encodings

VALUE	CODE SET	CODE SET	CODE SET	ENCODATION PATTERN	s b s b s b	VALUE	CODE SET	CODE SET	CODE SET	ENCODATION PATTERN	s b s b s b
	A	B	C				A	B	C		
0	SP	SP	00		212222	56	X	X	56		331121
1	!	!	01		222122	57	Y	Y	57		312113
2	*	*	02		222221	58	Z	Z	58		312311
3	#	#	03		121223	59	[[59		332111
4	\$	\$	04		121322	60	\	\	60		314111
5	%	%	05		131222	61]]	61		221411
6	&	&	06		122213	62	^	^	62		431111
7	'	'	07		122312	63	-	-	63		111224
8	((08		132212	64	NUL	'	64		111422
9))	09		221213	65	SOH	a	65		121124
10	*	*	10		221312	66	STX	b	66		121421
11	+	+	11		231212	67	ETX	c	67		141122
12	,	,	12		112232	68	EOT	d	68		141221
13	-	-	13		122132	69	ENQ	e	69		112214
14	.	.	14		122231	70	ACK	f	70		112412
15	/	/	15		113222	71	BEL	g	71		122114
16	0	0	16		123122	72	BS	h	72		122411
17	1	1	17		123221	73	HT	i	73		142112
18	2	2	18		223211	74	LF	j	74		142211
19	3	3	19		221132	75	VT	k	75		241211
20	4	4	20		221231	76	FF	l	76		221114
21	5	5	21		213212	77	CR	m	77		413111
22	6	6	22		223112	78	SO	n	78		241112
23	7	7	23		312131	79	SI	o	79		134111
24	8	8	24		311222	80	DLE	p	80		111242
25	9	9	25		321122	81	DC1	q	81		121142
26	:	:	26		321221	82	DC2	r	82		121241
27	;	;	27		312212	83	DC3	s	83		114212
28	<	<	28		322112	84	DC4	t	84		124112
29	=	=	29		322211	85	NAK	u	85		124211
30	>	>	30		212123	86	SYN	v	86		411212
31	?	?	31		212321	87	ETB	w	87		421112
32	@	@	32		232121	88	CAN	x	88		421211
33	A	A	33		111323	89	EM	y	89		212141
34	B	B	34		131123	90	SUB	z	90		214121
35	C	C	35		131321	91	ESC	[91		412121
36	D	D	36		112313	92	FS]	92		111143
37	E	E	37		132113	93	GS]	93		111341
38	F	F	38		132311	94	RS	-	94		131141
39	G	G	39		211313	95	US	DEL	95		114113
40	H	H	40		231113	96	FNC 3	FNC 3	96		114311
41	I	I	41		231311	97	FNC 2	FNC 2	97		411113
42	J	J	42		112133	98	1S B	1S A	98		411311
43	K	K	43		112331	99	CODE C	CODE C	99		113141
44	L	L	44		132131	100	CODE B	FNC 4	CODE B		114131
45	M	M	45		113123	101	FNC 4	CODE A	CODE A		311141
46	N	N	46		113321	102	FNC 1	FNC 1	FNC 1		411131
47	O	O	47		133121	103	pad	pad	pad		211412
48	P	P	48		313121	104	2S B	2S A	1S B		211214
49	Q	Q	49		211331	105	2S C	2S C	2S B		211232
50	R	R	50		231131	106	3S C	3S C	3S B		211133
51	S	S	51		213113						
52	T	T	52		213311						
53	U	U	53		213131						
54	V	V	54		311123						

NOTE 1 Shift is denoted as 1S, Double Shift is denoted as 2S, Triple Shift is denoted as 3S.

NOTE 2 The numeric value in the "s" and "b" columns represent the number of modules in each of the symbol character bars and spaces.

NOTE 3 Dashed line indicates trailing edge of the preceding character.