



SLOVENSKI STANDARD
SIST ISO 6142:2002

01-november-2002

BUXca Yý U
SIST ISO 6142:1995

Analiza plinov - Priprava kalibrirnih plinskih zmesi - Gravimetrijska metoda

Gas analysis -- Preparation of calibration gas mixtures -- Gravimetric method

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Analyse des gaz -- Préparation des mélanges de gaz pour étalonnage -- Méthode gravimétrique

Ta slovenski standard je istoveten z: SIST ISO 6142:2002 **ISO 6142:2001**
http://www.sist.si/log/stan/ISO/6142/2001/356-41cb-9fc0-0d5286ba6d03/sist-iso-6142-2002

ICS:

71.040.40 Kemijska analiza Chemical analysis

SIST ISO 6142:2002 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 6142:2002

<https://standards.iteh.ai/catalog/standards/sist/82178e5a-e356-41cb-9fc0-0d5286ba6d03/sist-iso-6142-2002>

INTERNATIONAL STANDARD

**ISO
6142**

Second edition
2001-04-01

Gas analysis — Preparation of calibration gas mixtures — Gravimetric method

*Analyse des gaz — Préparation des mélanges de gaz pour étalonnage —
Méthode gravimétrique*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 6142:2002](https://standards.iteh.ai/catalog/standards/sist/82178e5a-e356-41cb-9fc0-0d5286ba6d03/sist-iso-6142-2002)

<https://standards.iteh.ai/catalog/standards/sist/82178e5a-e356-41cb-9fc0-0d5286ba6d03/sist-iso-6142-2002>



Reference number
ISO 6142:2001(E)

© ISO 2001

ISO 6142:2001(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ISO 6142:2002](https://standards.iteh.ai/catalog/standards/sist/82178e5a-e356-41cb-9fc0-0d5286ba6d03/sist-iso-6142-2002)

<https://standards.iteh.ai/catalog/standards/sist/82178e5a-e356-41cb-9fc0-0d5286ba6d03/sist-iso-6142-2002>

© ISO 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Principle.....	1
4 Preparation of the mixture	2
5 Calculation of uncertainty.....	7
6 Verification of calibration gas mixture composition.....	9
7 Test report	10
Annex A (informative) Practical example.....	11
Annex B (informative) Guidelines for estimating filling pressures so as to avoid condensation of condensable components in gas mixtures.....	22
Annex C (informative) Precautions to be taken when weighing, handling and filling cylinders	25
Annex D (informative) Derivation of the equation for calculating the calibration gas mixture composition.....	29
Annex E (informative) Sources of error.....	31
Annex F (informative) Estimation of corrections and correction uncertainty	33
Annex G (informative) Computer implementation of recommended methods.....	35
Bibliography	36

ISO 6142:2001(E)**Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 6142 was prepared by Technical Committee ISO/TC 158, *Analysis of gases*, in collaboration with ISO/TC 193, *Natural gas*.

This second edition cancels and replaces the first edition (ISO 6142:1981), which has been revised to update the methods of preparation, estimation of the uncertainty and of validation of gravimetrically prepared calibration gases.

Annexes A to G of this International Standard are for information only.

SIST ISO 6142:2002

<https://standards.iteh.ai/catalog/standards/sist/82178e5a-e356-41cb-9fc0-0d5286ba6d03/sist-iso-6142-2002>

Gas analysis — Preparation of calibration gas mixtures — Gravimetric method

1 Scope

This International Standard specifies a gravimetric method for the preparation of calibration gas mixtures in cylinders of which the target accuracy of the composition has been pre-defined. It is applicable only to mixtures of gaseous or totally vaporized components which do not react with each other or with the cylinder walls. A procedure is given for a method of preparation based on requirements for the final gas mixture composition to be within pre-set levels of uncertainty. Multi-component gas mixtures (including natural gas) and multiple dilution mixtures are included in this International Standard and are considered to be special cases of the single component gravimetric preparation method.

This International Standard also describes the procedure for verifying the composition of gravimetrically prepared calibration gases. Provided rigorous and comprehensive quality assurance and quality control procedures are adopted during the preparation and validation of these gravimetric gas mixtures, calibration gases of the highest accuracy can be obtained for a wide range of gas mixtures, in comparison with other methods of preparing such gases.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

2 Normative references

SIST ISO 6142:2002

<https://standards.iteh.ai/catalog/standards/sist/82178e5a-e356-41cb-9f60-402800d4d03/sist-iso-6142-2002>

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 6141, *Gas analysis — Requirements for certificates for calibration gases and gas mixtures*.

ISO 6143:—1), *Gas analysis — Comparison methods for determining and checking the composition of calibration gas mixtures*.

ISO/IEC 17025, *General requirements for the competence of testing and calibration laboratories*.

IUPAC, *Commission on atomic weights and isotopic abundances: Atomic Weights of the Elements, biennial review*.

3 Principle

Calibration gas mixtures are prepared by transferring parent gases (pure gases or gravimetrically prepared mixtures of known composition) quantitatively from supply cylinders to the cylinder in which the calibration gas mixture will be contained. The amount of gaseous component added from the parent gas is determined by weighing after each successive addition.

1) To be published. (Revision of ISO 6143:1981)

ISO 6142:2001(E)

The amount of parent gas added to the cylinder in which the calibration gas mixture will be contained is determined by weighing either the supply cylinder or, alternatively, the cylinder in which the calibration gas mixture will be contained, before and after each addition. The difference in these two weighings corresponds to the mass of the gas added. The choice between these two weighing methods depends on which one represents the most suitable procedure for preparing the specified mixture. For example, the addition of small amounts of a specified component may best be performed by weighing a small, low-volume supply cylinder, before and after addition, on a highly sensitive, low-capacity balance.

A single-step preparation method may be used where the amount of each gaseous component required is large enough to accurately measure the mass of the cylinder, in which the calibration gas mixture will be contained, at each addition within the required composition uncertainty of the final calibration gas mixture. Alternatively, a multiple dilution method may be used to obtain a final mixture with acceptable uncertainty, particularly when low concentrations of the minor components are required. In this method, "pre-mixtures" are gravimetrically prepared and used as parent gases in one or more dilution steps.

The mass fraction of each component in the final calibration gas mixture is then given by the quotient of the mass of that component to the total mass of the mixture.

The gravimetric method scheme for preparing calibration gas mixtures, based on pre-set requirements for composition and the level of uncertainty, is given as a flow chart in Figure 1. The individual steps are explained in more detail in clause 4 (reference is given to the subclause for each step in Figure 1). An example of the gravimetric method scheme for preparing a calibration gas mixture following the Figure 1 flow chart is given in annex A.

4 Preparation of the mixture

ITeH STANDARD PREVIEW
(standards.iteh.ai)

4.1 Mixture composition and uncertainty

The composition of the final gas mixture is, by the principle of the gravimetric method, defined by the mass of each component. Gas composition is preferentially expressed as a mole fraction (mol/mol). If other quantities of composition are required (for example mass concentration or volume fraction) then the applicable conditions (pressure and temperature) shall be given and the additional uncertainty contributions shall be determined and considered in the calculation of the uncertainty in the composition of the calibration gas. The uncertainty of the final mixture composition is expressed as an expanded uncertainty, i.e. the combined standard uncertainty multiplied by a coverage factor.

The molar masses of the components, and their uncertainties, needed for the conversion of mass fraction to mole fraction, shall be derived using the most recent publication of the commission on atomic weights and isotopic abundances of the International Union of Pure and Applied Chemistry (IUPAC).

4.2 Feasibility of obtaining the gas mixture

4.2.1 General

Gas mixtures potentially capable of reacting dangerously shall be excluded for safety reasons. These phenomena shall be taken into account when considering the feasibility of preparing the required gas mixture, described in 4.2.2 to 4.2.4.

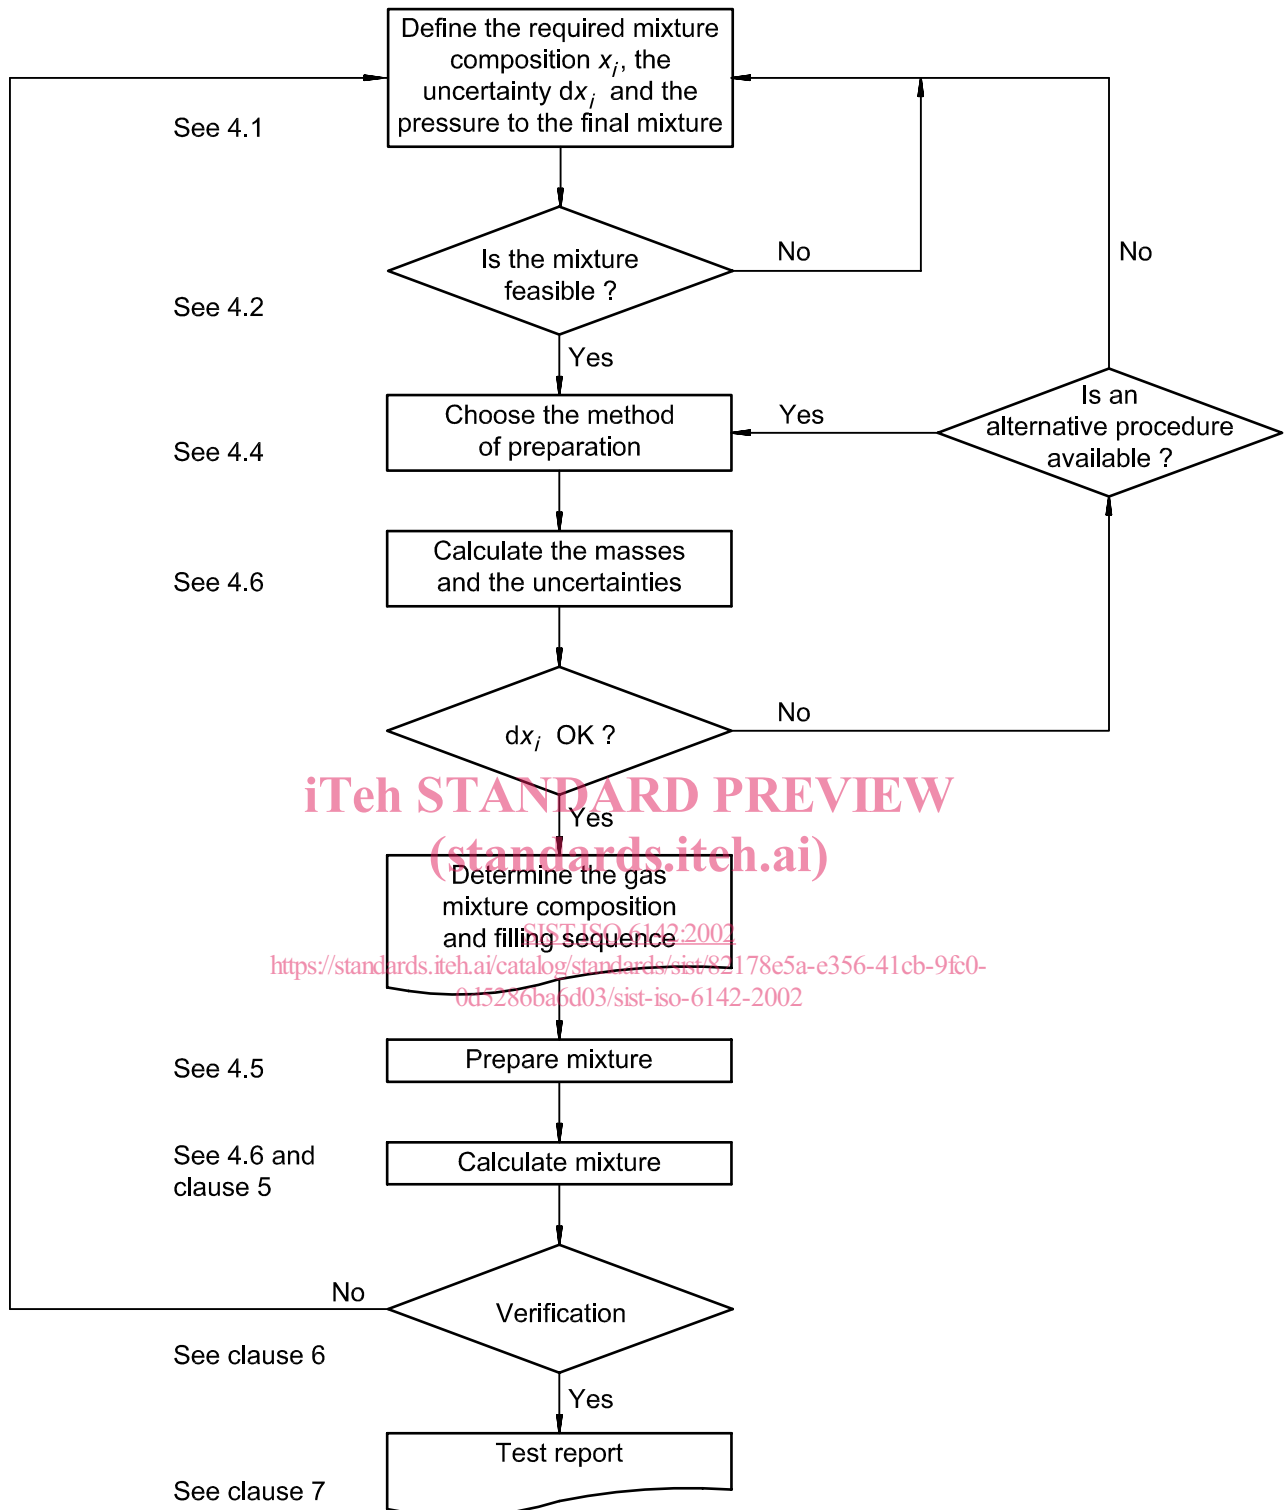


Figure 1 — Gravimetric method scheme for preparing calibration gas mixtures

ISO 6142:2001(E)**4.2.2 Condensation of the vapour to either a liquid or a solid phase**

When preparing, storing or handling gas mixtures which contain condensable components (see annex B), the following measures shall be taken to prevent condensation because loss by condensation will change the gas phase composition.

- During the preparation of the gas mixture, the filling pressure shall be set safely below the dew-point vapour pressure of the final mixture at the filling temperature. To prevent condensation at intermediate stages, this condition shall be fulfilled for every intermediate mixture as well. If condensation of an intermediate mixture cannot be safely excluded, measures shall be taken to vaporize any possible condensate and to homogenize the gas phase at an appropriate later stage.
- During the storage of the gas mixture, the storage temperature shall be set so as to maintain the filling pressure safely below the dew-point vapour pressure of the mixture at that temperature.
- During the handling of the gas mixture, the same condition on the handling temperature applies. Furthermore, to prevent condensation during mixture transfer, the transfer lines shall be heated if required.

In informative annex B, some guidance is given for estimating the maximum filling pressure for introducing components of a gas mixture at which no condensation of the condensable components is expected to occur. An example of this estimation is given in B.2 for a natural gas mixture.

4.2.3 Reactions between mixture components

Before preparing a gas mixture, it is necessary to consider possible chemical reactions between the components of the mixture. The method cannot be used to prepare mixtures

- containing potentially interactive substances (e.g. hydrochloric acid and ammonia),
- producing other possible dangerous reactions including explosions (e.g. mixtures containing flammable gases and oxygen),
- producing strong exothermic polymerizations (e.g. hydrogen cyanide), and
- which can decompose (e.g. acetylene).

Exceptionally this method can be used for substances undergoing dimerization, such as NO_2 to N_2O_4 , which is a reversible reaction.

A comprehensive compilation of reactive combinations is not available. Therefore, chemical expertise is necessary to assess the stability of a gas mixture.

For dangerous reactions and dangerous combinations, to be excluded for safety reasons, some information can be found in regulations on dangerous goods and in gas supplier handbooks.

4.2.4 Reactions with container materials

Before preparing a gas mixture, it is necessary to consider possible chemical reactions of mixture components with materials of a high-pressure cylinder, its valve and the transfer system. Special consideration shall be given to the attack by corrosive gases with metals and possible reactions with elastomers and greases used, for example, in the valve seat and seals. Such reactions should be prevented by using only materials that are inert to all components of the mixture. If this is not possible, measures shall be taken to minimize corrosive attack on the materials with which the gases make contact so as to prevent any significant effect on mixture composition and any danger in storage and use.

Information on the compatibility of gases with container materials is given in gas sampling guidelines, corrosion tables and gas supplier handbooks.

4.3 Purity analysis of primary gas standards

The accuracy achievable by the gravimetric method will depend significantly on the purity of the parent gases used for the preparation of the calibration gas mixture. Impurities in the parent gases are often one of the most critical contributors to the uncertainty of the final mixture composition. The uncertainty contributions depend on the amount of impurities present in the pure, parent gases and upon the accuracy with which these impurities have been measured. In many cases the purity of the major component (matrix gas) is of most importance. This is especially true when the mole fraction of the minor component is low and is likely to be an impurity in the major component. It is also important to evaluate critical impurities that may react with the minor component (e.g. oxygen present in pure nitrogen will react with NO to form NO₂). The result of purity analysis of parent gases shall be incorporated into a purity table containing the mole (or mass) fractions of all components with accompanying uncertainties derived from analysis.

Generally, impurities in a nominally “pure” parent gas are established by analysis and the mole fraction of the major component is conventionally determined by difference such that

$$x_{\text{pure}} = 1 - \sum_{i=1}^N x_i \quad (1)$$

where

x_i is the mole fraction of impurity i , determined by analysis;

N is the number of impurities likely to be present in the final mixture;

x_{pure} is the mole fraction “purity” of the “pure” parent gas.

When an impurity, likely to be present in the “pure” parent gas, is not detectable by the analytical method used, the mole fraction of the expected impurity shall be set equal to half of the value of the detection limit of the analytical method. The uncertainty of the determination of this mole fraction is based upon a rectangular distribution between zero and the value of the detection limit of the analytical method. In this way, the gravimetric method assumes that there is an equal likelihood that the impurity may be present in the “pure” parent gas at a level up to its value of the detection limit. Hence, the content of an undetected impurity forms a rectangular distribution from which its standard uncertainty is defined as half the value of the detection limit divided by $\sqrt{3}$.

4.4 Choice of preparation procedure

When choosing a suitable preparation procedure, a number of considerations shall be made to ensure the most appropriate method is used. The following is a list of parameters which shall be considered:

- pressure at which the gases are available and possibility of condensation (see annex B);
- maximum filling pressure of the cylinder to be used;
- established composition of each parent gas mixture used;
- filling method, i.e. direct method, multiple dilution, transfer method (use of small cylinder separately weighed on a low-capacity, high-resolution balance);
- characteristics of the type of balance to be used with its determined performance specifications;
- requirements for the preparation tolerance.

First calculate the value of the masses desired, or target masses m_i , of each component i , using equation (2).

ISO 6142:2001(E)

$$m_i = \frac{x_i M_i}{\sum_{j=1}^N x_j M_j} \cdot m_f \quad (2)$$

where

- x_i is the mole fraction of component i ;
- x_j is the mole fraction of component j ;
- M_i is the molar mass of component i ;
- M_j is the molar mass of component j ;
- N is the number of components in the final mixture;
- m_f is the mass of final mixture.

After the target masses have been calculated, a preparation procedure is selected and the uncertainties associated with the preparation process are calculated. If the calculated uncertainty for that procedure proves to be unacceptable, another procedure shall be adopted. It may be necessary to perform an iterative process to select a procedure with acceptable uncertainty.

These considerations result in a preparation procedure whereby a filling sequence consisting of several stages is selected in which gases are transferred into a cylinder in which the calibration gas mixture will be contained and subsequently weighed. Each stage has its own associated uncertainty and when combined, remain within the required level of uncertainty. This procedure shall be used in the subsequent preparation.

[SIST ISO 6142:2002](https://standards.iteh.ai/catalog/standards/sist/82178e5a-e356-41cb-9fc0-0d5286ba6d03/sist-iso-6142-2002)

4.5 Preparation of the mixture

Precautions to be taken when weighing, handling and filling cylinders are given for information in annex C.

To achieve the intended composition of the mixture, a tool is required. Normally the parameters used in targeting this composition are pressure and/or mass. When pressure is used for targeting this composition, temperature effects, resulting from the pressurization and the compressibility of the introduced components, is of importance. In particular, non-ideal behaviour of certain components makes it difficult to establish a simple relationship between added pressure and added mass. However, the compression factor, which quantifies these deviations from ideal behaviour, is a function of pressure, temperature and composition and can be calculated and used to predict the required pressure.

A more direct way of targeting the desired masses is by use of a balance on which the cylinder is placed to observe the difference in mass which occurs during transfer.

4.6 Calculation of the mixture composition

The mole fractions of the components in the final mixture are calculated using equation (3):

$$x_i = \frac{\sum_{A=1}^P \left(\frac{x_{i,A} \cdot m_A}{\sum_{i=1}^n x_{i,A} \cdot M_i} \right)}{\sum_{A=1}^P \left(\frac{m_A}{\sum_{i=1}^n x_{i,A} \cdot M_i} \right)} \quad (3)$$

where

- x_i is the mole fraction of the component i in the final mixture, $i = 1, \dots, n$;
- P is the total number of the parent gases;
- n is the total number of the components in the final mixture;
- m_A is the mass of the parent gas A determined by weighing, $A = 1, \dots, P$;
- M_i is the molar mass of the component i , $i = 1, \dots, n$;
- $x_{i,A}$ is the mole fraction of the component i , $i = 1, \dots, n$, in parent gas A , $A = 1, \dots, P$.

A method for deriving this formula is given for information in annex D.

<https://standards.iteh.ai/catalog/standards/sist/82178e5a-e356-41cb-9fc0-0d5286ba6d03/sist-iso-6142-2002>

5 Calculation of uncertainty

5.1.1 The uncertainty in the values of the mole or mass fractions of the components in a gravimetrically prepared calibration gas mixture indicates the dispersion of values which can reasonably be attributed to these fractions.

The procedure for evaluating the uncertainty may be summarized in 5.1.2 to 5.1.7.

5.1.2 Identify the steps taken in the preparation procedure. Following equation (3) in 4.6, three categories can be identified that will influence the uncertainty:

- the uncertainty in the weighing of the parent gases;
- the uncertainty in the purity of the parent gases;
- the uncertainty in molar masses.

NOTE The parent gases may themselves be gravimetrically prepared mixtures.

5.1.3 For each step in the gravimetric preparation procedure, a list shall be made of all sources of uncertainty, i.e., a list of all factors that may influence the resulting composition. A list of possible error sources is given for information in annex E. Some of these uncertainty contributions, for example the standard deviation in the repeated weighings, can be determined by repeated measurements (type A evaluation). For a well-characterized measurement under statistical control, a combined or pooled estimate of variance s_p^2 (or a pooled experimental standard deviation s_p) that characterizes the measurement may be available. In such cases, when the value of the measurand q is determined from n independent observations, the experimental variance of the arithmetic mean \bar{q}