
**Test conditions for boring and milling
machines with horizontal spindle — Testing
of the accuracy —**

Part 4:

Planer type machines with movable column

iTeh STANDARD PREVIEW

*Conditions d'essai des machines à aléser et à fraiser, à broche
horizontale — Contrôle de la précision —*

Partie 4: Machines à montant mobile et bancs en croix

[ISO 3070-4:1998](#)

<https://standards.iteh.ai/catalog/standards/sist/00b218f7-1d43-4e5b-86b3-782ee39536b5/iso-3070-4-1998>



Contents

Page

1	Scope	1
2	Normative references	1
3	Terminology and designation of axes	2
4	Preliminary remarks	2
	4.1 Measuring units	2
	4.2 Reference to ISO 230-1	2
	4.3 Testing sequence	2
	4.4 Tests to be performed	2
	4.5 Measuring instruments	3
	4.6 Machining tests	3
	4.7 Minimum tolerance	3
5	Geometric tests	4
	5.1 Straightness and angular deviations of coordinate axes	4
	5.2 Squareness between the coordinate axes	10
	5.3 Table	12
	5.4 Indexing or rotary table	15
	5.5 Boring spindle	18
	5.6 Milling spindle	23
	5.7 Ram	24
	5.8 Integral facing head	27
	5.9 Steady block	31
6	Machining tests	32
7	Checking of accuracy and repeatability of positioning by numerical control	35

Annex

A	Bibliography	41
---	--------------------	----

© ISO 1998

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet central@iso.ch
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75% of the member bodies casting a vote.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Test conditions for metal

International Standard ISO 3070-4 was prepared by Technical Committee ISO/TC 39, *Machine Tools*, Subcommittee SC 2,

<https://standards.iteh.ai/catalog/standards/sist/00b218f7-1d43-4e5b-86b3-782ee39536b5/iso-3070-4-1998>

This second edition cancels and replaces the first edition (ISO 3070-3:1982) which has been technically revised.

ISO 3070 consists of the following parts, under the general title *Test conditions for boring and milling machines with horizontal spindle — Testing of the accuracy*:

- *Part 0: General introduction*
(to become part 1 on its next revision)
- *Part 2: Table-type machines*
(formerly part 1)
- *Part 3: Floor type machines with detached work-holding fixed table*
(formerly part 2)
- *Part 4: Planer type machines with movable column*
(formerly part 3)

Annex A of this part of ISO 3070 is for information only.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3070-4:1998

<https://standards.iteh.ai/catalog/standards/sist/00b218f7-1d43-4e5b-86b3-782ee39536b5/iso-3070-4-1998>

Test conditions for boring and milling machines with horizontal spindle — Testing of the accuracy —

Part 4:

Planer type machines with movable column

1 Scope

This part of ISO 3070 specifies, with reference to ISO 230-1 and ISO 230-2, geometric tests, machining tests and tests for checking accuracy and repeatability of positioning by numerical control, on general purpose, normal accuracy, planer type horizontal spindle boring and milling machines with movable column. These types of machine tool are defined in subclauses 3.2 and 3.3 of ISO 3070-0:1982. This part of ISO 3070 also specifies the applicable tolerances corresponding to the above mentioned tests.

These machines can be provided with spindle heads of different types corresponding in most cases to figures:

- 4 (spindle head with sliding boring spindle and milling spindle)
- 5 (spindle head with sliding boring spindle and with facing head)
- 6 (spindle head with ram or milling ram)

of ISO 3070-0:1982.

In addition, it should be noted that this part of ISO 3070 concerns machines which have movement of the table along the X-axis, a vertical movement of the spindle head along the Y-axis, a movement of the column along the W-axis and may include a rotary or indexing table.

This part of ISO 3070 deals only with the verification of the accuracy of the machine. It does not apply to the testing of the machine operation (vibration, abnormal noise, stick-slip motion of components, etc.) nor to machine characteristics (such as speeds, feeds, etc.), as such checks are generally carried out before testing the accuracy.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 3070. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 3070 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 230-1:1996, *Test code for machine tools — Part 1: Geometric accuracy of machines operating under no-load or finishing conditions.*

ISO 230-2:1997, *Test code for machine tools — Part 2: Determination of accuracy and repeatability of positioning of numerically controlled axes.*

ISO 1101:—²⁾, *Geometrical Product Specifications (GPS) — Geometrical tolerancing — Generalities, definitions, symbols, indication on drawings.*

ISO 3070-0:1982³⁾, *Test conditions for boring and milling machines with horizontal spindle — Testing of accuracy — Part 0: General introduction.*

3 Terminology and designation of axes

See ISO 3070-0.

4 Preliminary remarks

4.1 Measuring units

In this part of ISO 3070, all linear dimensions, deviations and corresponding tolerances are expressed in millimeters; angular dimensions are expressed in degrees, and angular deviations and the corresponding tolerances are expressed in ratios as the primary method, but in some cases microradians or arcseconds may be used for clarification purposes. The equivalence of the following expressions should always be kept in mind:

$$0,010/1\ 000 = 10 \times 10^{-6} = 10 \mu\text{rad} \approx 2''$$

4.2 Reference to ISO 230-1

To apply this part of ISO 3070, reference shall be made to ISO 230-1, especially for the installation of the machine before testing, warming up of the spindle and other moving components, description of measuring methods and recommended accuracy of testing equipment.

In the «Observations» block of the tests described in the following sections, the instructions are followed by a reference to the corresponding clause in ISO 230-1 in cases where the test concerned is in compliance with the specifications of that part of ISO 230.

4.3 Testing sequence

The sequence in which the tests are presented in this part of ISO 3070 in no way defines the practical order of testing. In order to make the mounting of instruments or gauging easier, tests may be performed in any order.

4.4 Tests to be performed

When testing a machine, it is not always necessary nor possible to carry out all the tests described in this part of ISO 3070. When the tests are required for acceptance purposes, it is up to the user to choose, in agreement with the supplier/manufacturer, those tests relating to the components and/or the properties of the machine which are of interest. These tests are to be clearly stated when ordering a machine. The mere reference to this part of ISO 3070 for the acceptance tests, without specifying the tests to be carried out, and without agreement on the relevant expenses, cannot be considered as binding for any contracting party.

1) To be published. (Revision of ISO 230-2:1988)

2) To be published. (Revision of ISO 1101:1983)

3) See "Foreword".

4.5 Measuring instruments

The measuring instruments indicated in the tests described in the following sections are examples only. Other instruments measuring the same quantities and having at least the same accuracy may be used. Dial gauges shall have a resolution of 0,001 mm or better.

4.6 Machining tests

Machining tests shall be made with finishing cuts only, not with roughing cuts which are liable to generate appreciable cutting forces.

4.7 Minimum tolerance

When the tolerance for a geometric test is established for a measuring length different from that given in this part of ISO 3070 (See 2.311 of ISO 230-1:1996), it shall be taken into consideration that the minimum value of tolerance is 0,005 mm.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

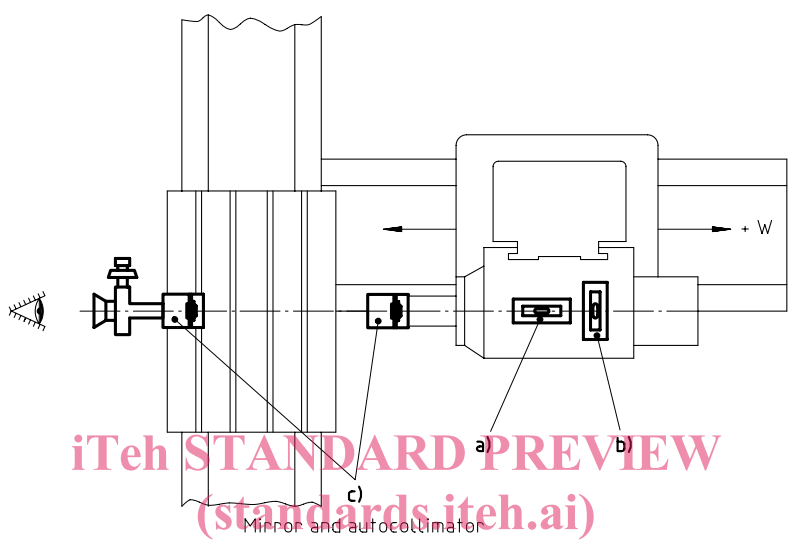
[ISO 3070-4:1998](https://standards.iteh.ai/catalog/standards/sist/00b218f7-1d43-4e5b-86b3-782ee39536b5/iso-3070-4-1998)

<https://standards.iteh.ai/catalog/standards/sist/00b218f7-1d43-4e5b-86b3-782ee39536b5/iso-3070-4-1998>

5 Geometric tests

5.1 Straightness and angular deviations of coordinate axes

<p>Object</p> <p>Checking of straightness of the column movement (W-axis):</p> <p>a) in the YZ-plane (vertical plane)(EYW);</p> <p>b) in the ZX-plane (horizontal plane)(EXW).</p>		<p>G 1</p>
<p>Diagram</p> <p style="text-align: center;">ISO 3070-4:1998 https://standards.iteh.ai/catalog/standards/sist/00b218f7-1d43-4e5b-86b3-782ee39536b5/iso-3070-4-1998</p>		
<p>Tolerance</p> <p>a) and b)</p> <p>0,02 for measuring length g lengths above 1 000</p> <p>Local tolerance: 0,006 for any measuring length of 300</p>	<p>(Measured deviation)</p> <p>a) b)</p>	
<p>Measuring instruments</p> <p>Straightedge, dial gauge/support and gauge blocks or optical methods or microscope and taut-wire</p>		
<p>Observations and references to ISO 230-1 5.232.11, 5.232.12 and 5.232.13</p> <p>Table and spindle head locked. Set a straightedge on the table, parallel¹⁾ to the column movement (W-axis) for a) vertically and b) horizontally.</p> <p>If the spindle can be locked, mount a dial gauge on it. If the spindle can not be locked, the dial gauge shall be mounted on the head. The stylus shall be normal to the reference face of the straightedge.</p> <p>Traverse the column in the W-direction and note readings.</p> <p>1) Parallel means that the readings of the dial gauge touching the straightedge at both ends of the movement are the same value and in this case, the maximum difference of the readings gives the straightness deviation.</p>		

<p>Object</p> <p>Checking of angular deviations of the column movement (W-axis):</p> <ul style="list-style-type: none"> a) in the YZ-plane (EAW : pitch); b) in the XY-plane (ECW : roll); c) in the ZX-plane (EBW : yaw). 	<p>G 2</p>			
<p>Diagram</p> 				
<p style="text-align: center;">ISO 3070-4:1998 https://standards.iteh.ai/catalog/standards/sist/00b218f7-1d43-4e5b-86b3-782ee39536b5/iso-3070-4-1998</p>	<p style="text-align: center;">(Measured deviation)</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 10px;">a)</td> <td style="padding: 0 10px;">b)</td> <td style="padding: 0 10px;">c)</td> </tr> </table>	a)	b)	c)
a)	b)	c)		
<p>Measuring instruments</p> <ul style="list-style-type: none"> a) Precision level or optical angular deviation measuring instruments b) Precision level c) Optical angular deviation measuring instruments 				
<p>Observations and references to ISO 230-1 5.231.3 and 5.232.2</p> <p>The level or instrument shall be placed on the movable component:</p> <ul style="list-style-type: none"> a) (EAW: pitch) in the Z-axis direction (set vertically) b) (ECW: roll) in the X-axis direction (set vertically) c) (EBW: yaw) in the Z-axis direction (set horizontally) <p>The reference level shall be located on the table, and the spindle head shall be in the middle of the travel range.</p> <p>When W axis motion causes an angular movement of both spindle head and work holding table, differential measurements of the two angular movements shall be made and this shall be stated.</p> <p>Measurements shall be carried out at a minimum of five positions equally spaced along the travel in both directions of movement.</p> <p>The difference between the maximum and the minimum readings shall not exceed the tolerance.</p>				

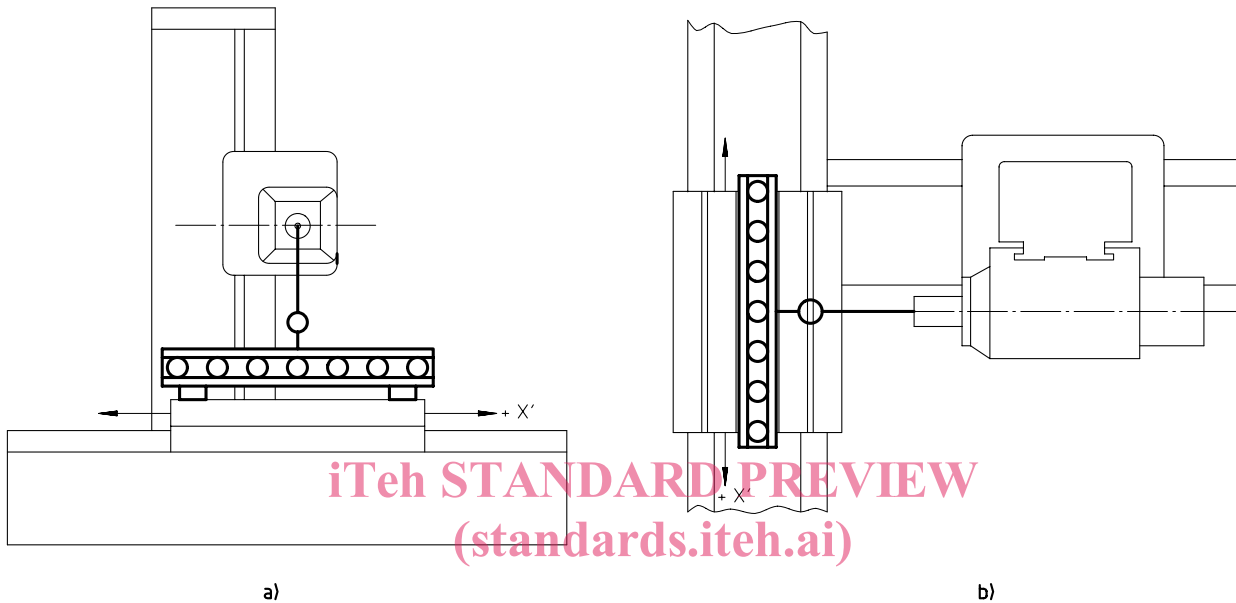
Object

G 3

Checking of straightness of the table movement (X-axis):

- a) in the XY-plane (vertical plane)(EYX);
- b) in the ZX-plane (horizontal plane)(EZX).

Diagram



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3070-4:1998

<https://standards.iteh.ai/catalog/standards/sist/00b218f7-1d43-4e5b-86b3-782ee39536b5/iso-3070-4-1998>

g lengths up to 1 000

Add 0,01 to the preceding tolerance for each 1 000 increase in length beyond 1 000

Maximum tolerance: 0,05

Local tolerance: 0,006 for any measuring length of 300

(Measured deviation)

a) b)

Measuring instruments

Straightedge, dial gauge/support and gauge blocks or optical methods or microscope and taut-wire

Observations and references to ISO 230-1

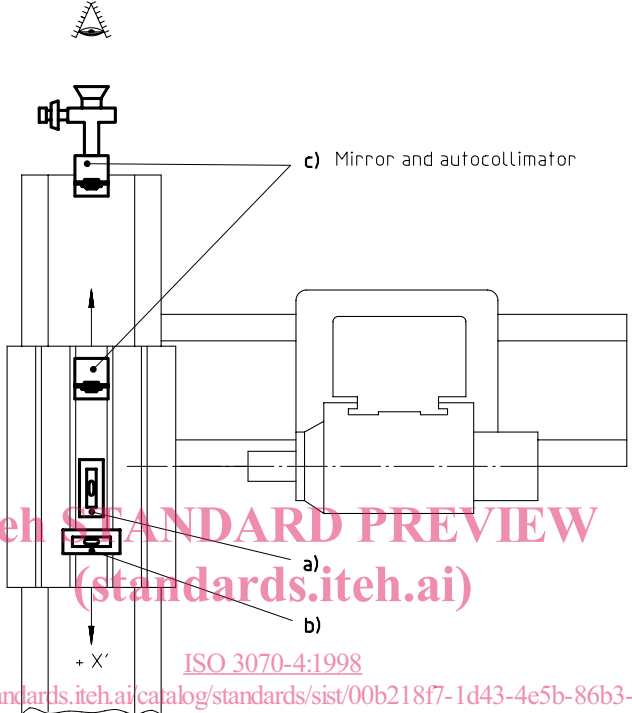
5.232.11, 5.232.12 and 5.232.13

Set a straightedge at the middle position of the table, parallel¹⁾ to the X-axis movement of the table for a) vertically and b) horizontally.

If the spindle can be locked, mount a dial gauge on it. If the spindle cannot be locked, the dial gauge shall be mounted on the head. The stylus shall be normal to the reference face of the straightedge.

Traverse the table in the X-axis direction and note the readings.

1) Parallel means that the readings of the dial gauge touching the straightedge at both ends of the movement are the same value and in this case, the maximum difference of the readings gives the straightness deviation.

<p>Object</p> <p>Checking of angular deviation of the table movement (X-axis):</p> <ul style="list-style-type: none"> a) in the XY-plane (ECX: pitch); b) in the YZ-plane (EAX: roll); c) in the ZX-plane (EBX: yaw). 	<p>G 4</p>							
<p>Diagram</p>  <p style="text-align: center;">iTech STANDARD PREVIEW (standards.iteh.ai)</p> <p style="text-align: center;">ISO 3070-4:1998 https://standards.iteh.ai/catalog/standards/sist/00b218f7-1d43-4e5b-86b3-782ee39536b5/iso-3070-4-1998</p>								
<p>Tolerance</p> <p style="text-align: center;">a), b) and c)</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>$X \leq 4\ 000$</td> <td>0,04/1 000</td> </tr> <tr> <td>$X > 4\ 000$</td> <td>0,06/1 000</td> </tr> </table> <p>Local tolerance: 0,02/1 000 for any measuring length of 300</p>	$X \leq 4\ 000$	0,04/1 000	$X > 4\ 000$	0,06/1 000	<p>(Measured deviation)</p> <table style="width: 100%; text-align: center;"> <tr> <td>a)</td> <td>b)</td> <td>c)</td> </tr> </table>	a)	b)	c)
$X \leq 4\ 000$	0,04/1 000							
$X > 4\ 000$	0,06/1 000							
a)	b)	c)						
<p>Measuring instruments</p> <ul style="list-style-type: none"> a) Precision level or optical angular deviation measuring instruments b) Precision level c) Optical angular deviation measuring instruments 								
<p>Observations and references to ISO 230-1 5.231.3 and 5.232.2</p> <p>The level or instrument shall be placed on the movable component:</p> <ul style="list-style-type: none"> a) (ECX: pitch) in the X-axis direction (set vertically) b) (EAX: roll) in the Z-axis direction (set vertically) c) (EBX: yaw) in the X-axis direction (set horizontally) <p>The reference level shall be located on the spindle head, and the spindle head shall be in the middle of the travel range.</p> <p>When X axis motion causes an angular movement of both spindle head and work holding table, differential measurements of the two angular movements shall be made and this shall be stated.</p> <p>Measurements shall be carried out at a minimum of five positions equally spaced along the travel in both directions of the movement.</p> <p>The difference between the maximum and the minimum readings shall not exceed the tolerance.</p>								

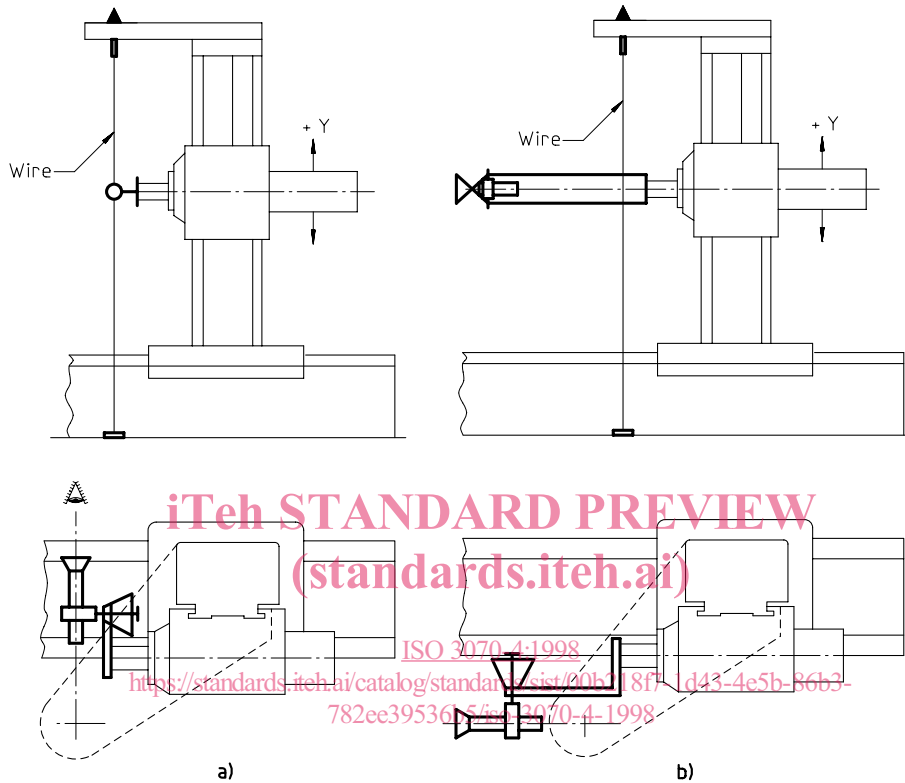
Object

G 5

Checking of straightness of the spindle head movement (Y-axis):

- a) in the YZ-plane (vertical plane containing the spindle axis)(EZY);
- b) in the XY-plane (vertical plane square to the spindle axis)(EXY).

Diagram



Tolerance

a) and b)

0,02 for any measuring length of 1 000

Add 0,01 to the preceding tolerance for each 1 000 increase in length up to 4 000

Add 0,02 for each 1 000 increase in length over 4 000

(Measured deviation)

a)

b)

Measuring instruments

Microscope and taut-wire or optical methods



Observations and references to ISO 230-1

5.232.12 or 5.232.13

Carry out the test with the column and table locked, table in mid-travel.

The taut-wire shall be tightened between fixed parts independent of or integral with the machine, and as near as possible to the vertical slideways of the column.

If the spindle can be locked, the microscope or the alignment telescope can be mounted on it. If the spindle cannot be locked, the microscope shall be placed on the spindle head of the machine.

<p>Object</p> <p>Checking of angular deviations of the spindle head movement (Y-axis):</p> <p>a) in the YZ-plane (EAY); b) in the ZX-plane (EBY).</p>	<p>G 6</p>
<p>Diagram</p> <div style="display: flex; justify-content: space-around; align-items: center;">   </div> <p style="text-align: center; color: red; font-weight: bold; font-size: 1.2em;">iTeh STANDARD PREVIEW (standards.iteh.ai)</p>	
<p>Tolerance</p> <p>a) and b)</p> <p style="text-align: center;"> $X \leq 4\,000$ 0,04/1,000 $X > 4\,000$ 0,04/1,000 </p>	<p>(Measured deviation)</p> <p>a) b)</p>
<p>Measuring instruments</p> <p>a) Precision level or optical angular deviation measuring instruments b) Cylindrical square, level and dial gauges/support arm</p>	
<p>Observations and references to ISO 230-1 5.231.3 and 5.232.2</p> <p>Measurements shall be carried out at a minimum of five positions equally spaced along the travel in both directions of up and down movement.</p> <p>a) Place a level on the spindle head in the Z-axis direction. The reference level shall be located on the table, and the spindle head shall be in the middle of the travel range. The difference between the maximum and the minimum readings shall not exceed the tolerance.</p> <p>b) Mount a surface plate on the table and adjust it so that its face is levelled. Place a cylindrical square on the spindle head, plus of the dial gauge mounted on a special arm fixed to the spindle head. Place level on the surface plate in Z-axis direction. Note the readings at the measuring positions of the spindle head travel (Y-axis). Move the table distance d and reset the dial gauge so that the stylus touches the cylindrical square. When the level shows a change due to roll in table movement, adjust the level of surface to its starting position and then note readings at the same measuring positions. For each measuring position calculate the differences of two readings. The difference of maximum and minimum divided by distance d then gives angular deviation.</p>	