
**Technical product documentation —
Lettering —**

**Part 5:
CAD lettering of the Latin alphabet, numerals
and marks**

iTeh STANDARD PREVIEW

Documentation technique de produits — Écriture —

(standards.iteh.ai)
*Partie 5: Écriture en conception assistée par ordinateur de l'alphabet latin,
des chiffres et des signes*

ISO 3098-5:1997

<https://standards.iteh.ai/catalog/standards/sist/9ee9aac1-427a-48d9-87f7-cf4462acff90/iso-3098-5-1997>



Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

iTeh STANDARD PREVIEW

International Standard ISO 3098-5 was prepared by Technical Committee ISO/TC 10, *Technical drawings, product definition and related documentation*, Subcommittee SC 1, *Basic conventions*.

ISO 3098-5:1997

ISO 3098 consists of the following parts, under the general title *Technical product documentation — Lettering*:

- Part 0: *General requirements*
- Part 1: *Currently used characters*
- Part 2: *Greek characters*
- Part 3: *Diacritical and particular marks for the Latin alphabet*
- Part 4: *Cyrillic characters*
- Part 5: *CAD lettering of the Latin alphabet, numerals and marks*

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet central@iso.ch
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

Technical product documentation — Lettering —

Part 5:

CAD lettering of the Latin alphabet, numerals and marks

1 Scope

This part of ISO 3098 specifies the general requirements for computer-aided design and draughting (CADD) lettering, in accordance with all other parts of this International Standard, to be used in technical product documentation (in particular on technical drawings).

It includes basic conventions as well as rules for the application of CAD lettering using the techniques of numerically controlled lettering and draughting systems.

(standards.iteh.ai)

[ISO 3098-5:1997](https://standards.iteh.ai/catalog/standards/sist/9ee9aac1-427a-48d9-87f7-cf4462acff90/iso-3098-5-1997)

2 Normative references

<https://standards.iteh.ai/catalog/standards/sist/9ee9aac1-427a-48d9-87f7-cf4462acff90/iso-3098-5-1997>

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 3098. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 3098 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 3098-0:1997, *Technical product documentation — Lettering — Part 0: General requirements*.

ISO/TR 10623:1991, *Technical product documentation — Requirements for computer-aided design and draughting — Vocabulary*.

3 Definitions

For the purposes of this part of ISO 3098, the definitions given in ISO 3098-0 apply. Further definitions used in computer-aided design and draughting are given in ISO/TR 10623.

3.1 proportional spacing arrangement: Arrangement of graphic characters in the direction of writing spaced according to their natural width.

3.2 tabular spacing arrangement: Arrangement of graphic characters in the direction of writing within a constant-width space at predetermined positions, independent of the natural width of the characters.

4 General requirements

The general requirements for CAD lettering are specified in ISO 3098-0.

5 Requirements for CAD lettering

5.1 The types of CAD lettering are as follows:

- lettering type CB, vertical (V): see figure 1 (preferred application);
- lettering type CB, sloped (S);
- lettering type CA, vertical (V): see figure 2;
- lettering type CA, sloped (S).

The dimensions of these types of CAD lettering are specified in table 1.

NOTE — In contrast with type CB, the character width (in the direction of lettering) and the line width of lettering type CA may be reduced by a factor of $\sqrt{2}$ (to give approximately lettering type A in accordance with ISO 3098-0).

iTeh STANDARD PREVIEW (standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/9ee9aae1-427a-48d9-87f7-cf4462acf90/iso-3098-5-1997>

<https://standards.iteh.ai/catalog/standards/sist/9ee9aae1-427a-48d9-87f7-cf4462acf90/iso-3098-5-1997>

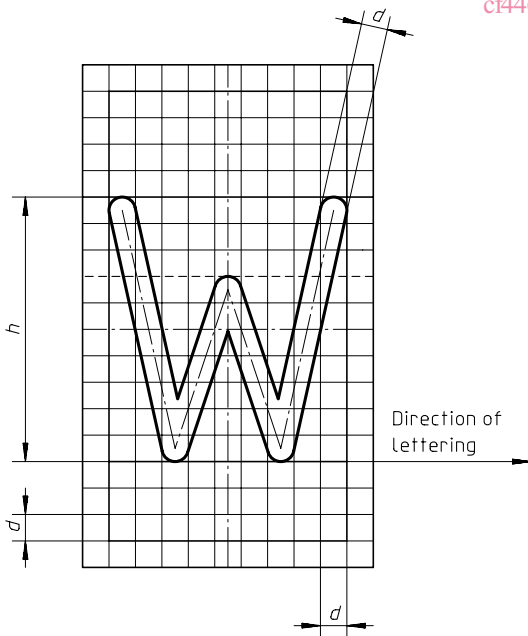


Figure 1

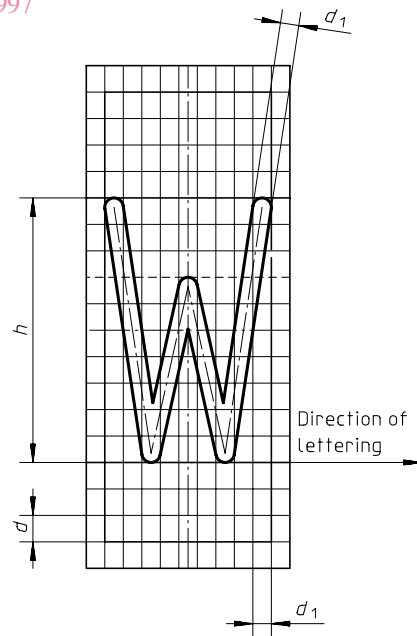



Figure 2

5.2 The types of spacing arrangements are as follows:

- tabular spacing (T): see figure 3;
- proportional spacing (P): see figure 4.

5.3 Each member of a graphic character set is established within a character box. The elements of the characters shall be positioned by means of a grid system. The following criteria for any member of a graphic character set shall be met:

- a) dimensions (see figures 5 and 6), shape and location;
- b) type of spacing arrangement (see figures 3 and 4);
- c) points of adjustment within the character box (see figure 7).

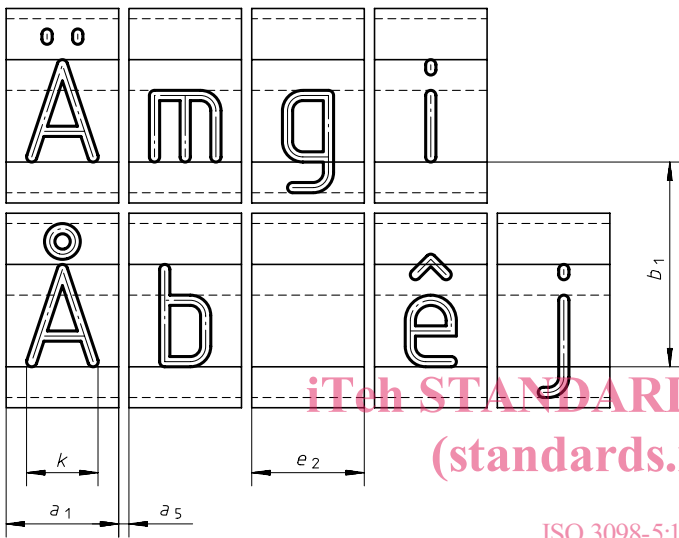

iTech STANDARD PREVIEW
(standards.iteh.ai)

ISO 3098-5:1997
<https://standards.iteh.ai/catalog/standards/sist/9ee9aae1-427a-48d9-87f7-cf4462acff90/iso-3098-5-1997>

Figure 3

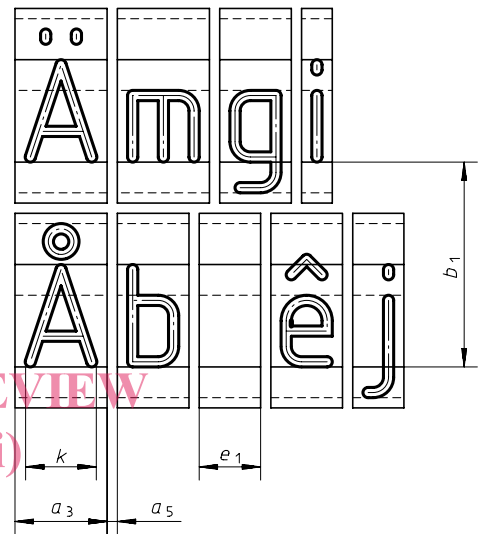


Figure 4

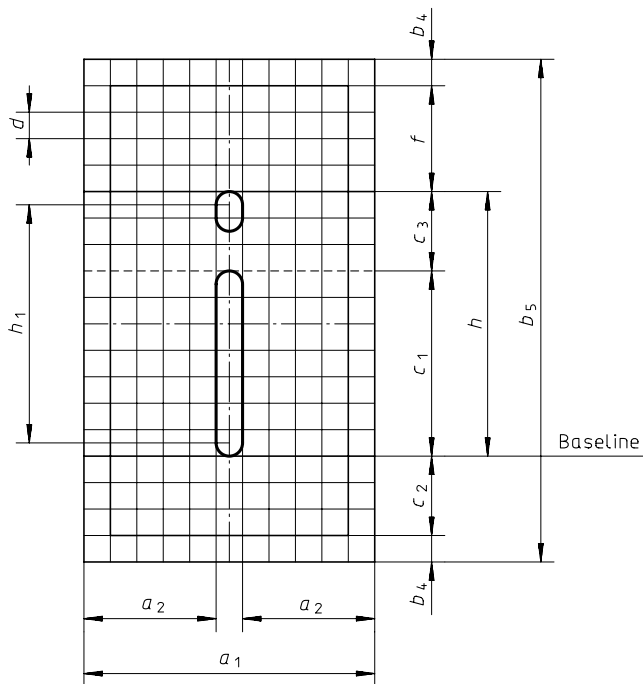


Figure 5

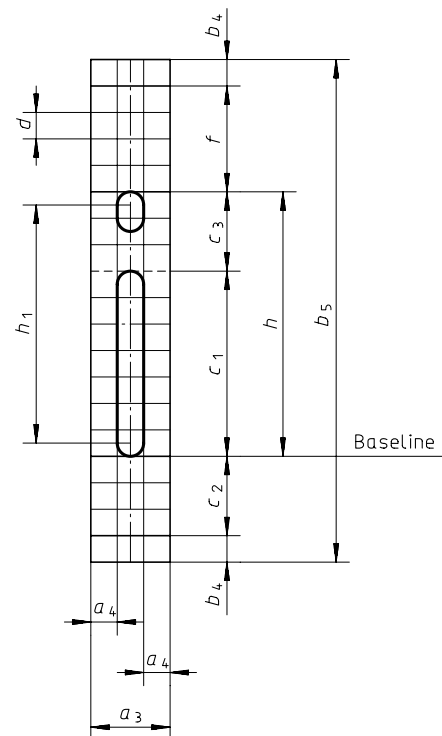


Figure 6

Table 1 — Dimensioning of lettering types CB and CA

Dimensions in millimetres

Characteristic		Multiple of <i>h</i>	Dimensions							
Lettering height	<i>h</i>	$(10/10)h$	1,8	2,5	3,5	5	7	10	14	20
Height of lower-case letters (x-height)	<i>c</i> ₁	$(7/10)h$	1,26	1,75	2,5 ³⁾	3,5	5 ³⁾	7	10 ³⁾	14
Tail of lower-case letters	<i>c</i> ₂	$(3/10)h$	0,54	0,75	1,05	1,5	2,1	3	4,2	6
Stem of lower-case letters	<i>c</i> ₃									
Area of diacritical marks (upper-case letters)	<i>f</i>	$(4/10)h$	0,72	1	1,4	2	2,8	4	5,6	8
Width of any character (lettering type CB) ¹⁾	<i>k</i>	—	See clause 8 and tables 3 to 6							
Height of the central line	<i>h</i> ₁	$(9/10)h$	1,62	2,25	3,15	4,5	6,3	9	12,6	18
Width of the character box (lettering type CB) ¹⁾	T	<i>a</i> ₁	1,98	2,75	3,85	5,5	7,7	11	15,4	22
	P	<i>a</i> ₃	$[(2/10)h]+k$ See clause 8 and tables 3 to 6							
²⁾	<i>b</i> ₁	$(19/10)h$	3,42	4,75	6,65	9,5	13,3	19	26,6	38
Height of the character box	<i>b</i> ₅	$(19/10)h$								
Horizontal spacing between character box and character (lettering type CB) ¹⁾	T	<i>a</i> ₂	$(a_1 - k)/2$ See clause 8 and tables 3 to 6							
	P	<i>a</i> ₄	$(1/10)h$							
Vertical spacing between character box and character	<i>b</i> ₄	$(1/10)h$	0,18	0,25	0,35	0,5	0,7	1	1,4	2
Line width	lettering type CB	<i>d</i>	$(1/10)h$							
	lettering type CA	<i>d</i> ₁	0,13 ³⁾	0,18 ³⁾	0,25	0,35	0,5	0,7 ³⁾	1	1,4 ³⁾
Spacing between words (lettering type CB) ¹⁾	P	<i>e</i> ₁	$(6/10)h$							
	T	<i>e</i> ₂	1,08	1,5	2,1	3	4,2	6	8,4	12
Spacing between character boxes	<i>a</i> ₅	$(11/10)h$	1,98	2,75	3,85	5,5	7,7	11	15,4	22
		≥ 0	—							

1) In case of lettering type CA the values of the dimensions *k*, *a*₁, *a*₃, *a*₂, *a*₄, *e*₁ and *e*₂ are calculated by dividing the values of the lettering type CB by $\sqrt{2}$.

2) Lettering style: Upper-case and lower-case letters with diacritical marks; for spacings by *b*₂ and *b*₃, see ISO 3098-0:1997, table 2.

3) Rounded values.

6 Alignment

Each character, each line of text and each area to be filled by several lines of text shall have one point of alignment.

The indication and location of points of alignment are given in table 2 and figures 7 and 8.

If numerical values are written in decimal form, the alignment shall be made with respect to the decimal sign (comma¹⁾). An example is shown in figure 9.

Table 2 — Indication of points of alignment

Horizontal

Direction		left	centre	right
		top	1	4
Vertical	centre	2	5	8
	bottom	3	6	9

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3098-5:1997
<https://standards.iteh.ai/catalog/standards/sis/9ee9aac1-427a-48d9-87f7-c4462ac190/iso-3098-5-1997>

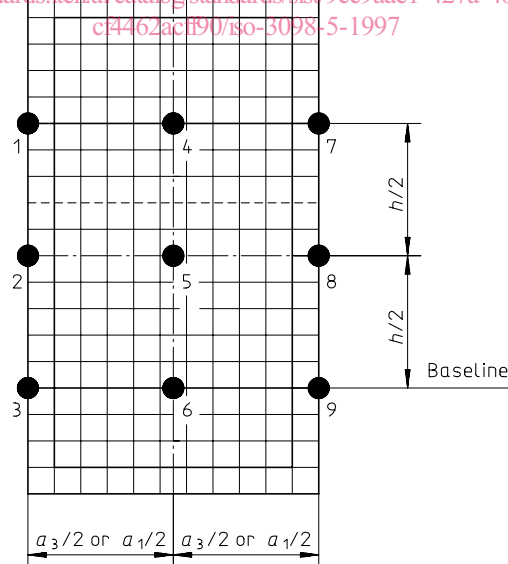


Figure 7

1) See IEC/ISO Directives, Part 3, 1997, 6.6.7.1.

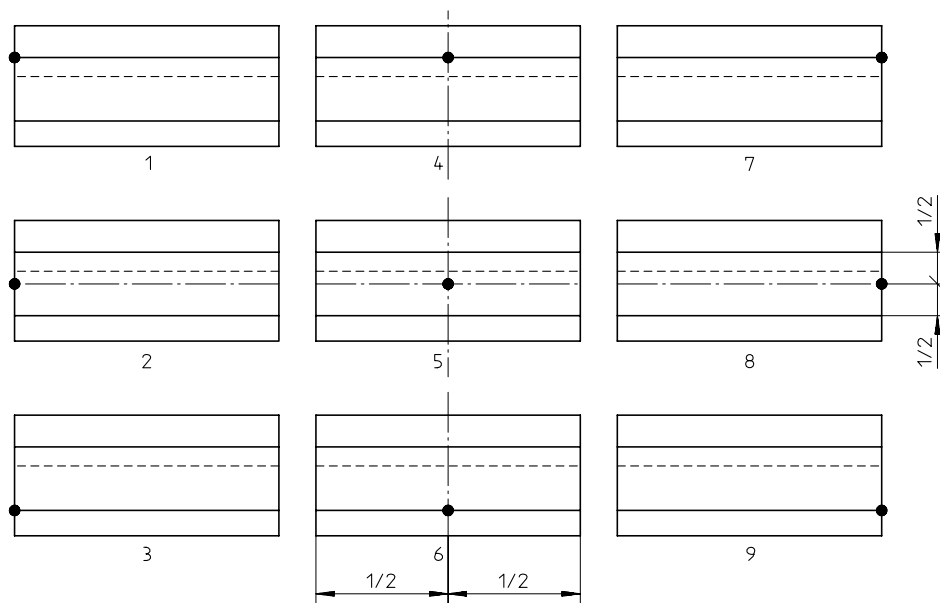


Figure 8

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3098-5:1997

<https://standards.iteh.ai/catalog/standards/sist/9ee92ae1-427a-48d9-87f7-cf4462acff90/iso-3098-5-1997>


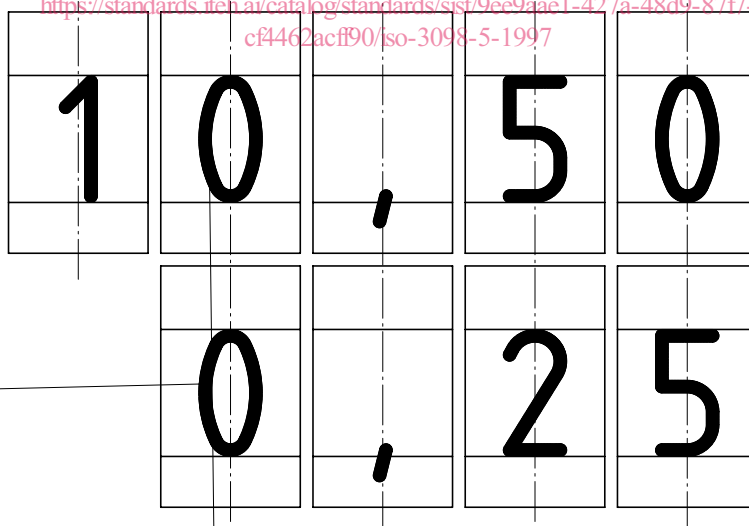


Figure 9

Several lines within an area filled by text may be arranged left-aligned, centred or right-aligned (see figure 10). An example of the location of the point of alignment for a complete area is shown in figure 11.

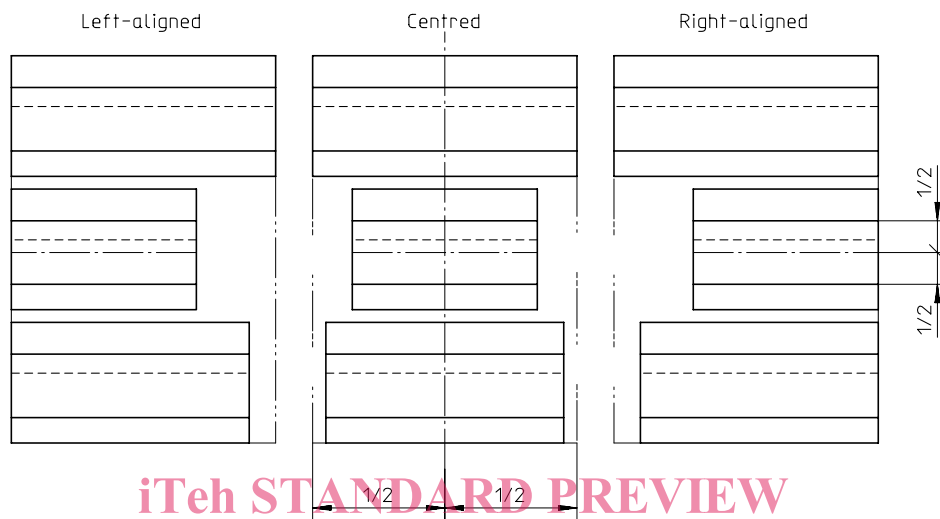

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Figure 10

ISO 3098-5:1997
<https://standards.iteh.ai/catalog/standards/sist/9ee9aae1-427a-48d9-87f7-cf4462acff90/iso-3098-5-1997>

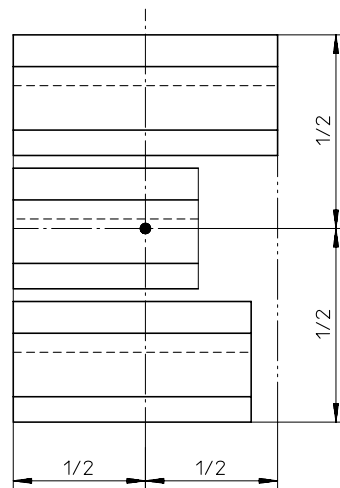


Figure 11

7 Designation

A graphic character set of a CAD lettering type shall be designated in accordance with ISO 3098-0.

EXAMPLE — A graphic character set of lettering type CB in proportional spacing arrangement, vertical, Latin alphabet, size 3,5 mm, shall be designated as follows:

Lettering ISO 3098 - CB PVL - 3,5

8 Form of characters

The characters of the lettering type CB shown in tables 3 to 6 are presented within an imaginary grid which is necessary for identification of positioning and proportions.

An example, shown in figure 12, presents a certain character within an imaginary grid.

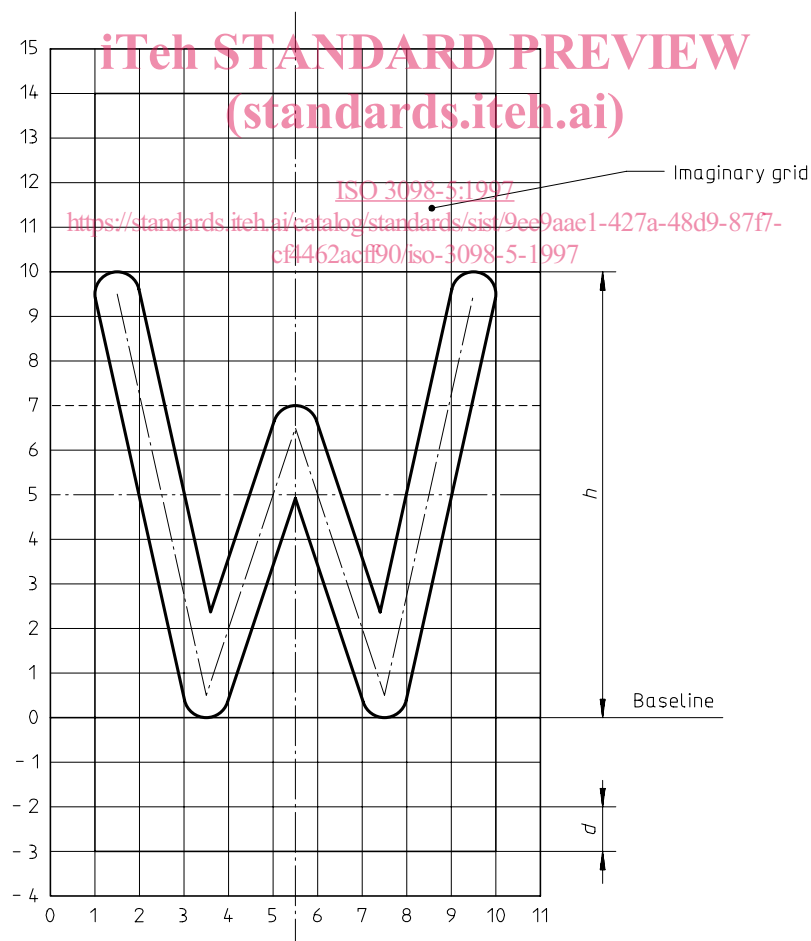


Figure 12

Indications of characters in tables 3 to 6 are interpreted as follows.

a) Numerals in front of the oblique stroke indicate the kind of character.

001/.. to 100/...: upper-case (capital) letters (table 3)

101/... to 200/...: lower-case (small) letters (table 4)

201/... to 300/...: numerals (table 5)

301/... to 400/...: marks (table 6)

b) Numerals behind the oblique stroke indicate the diacritical marks of letters.

.../00: without diacritical mark

.../01: with grave accent

.../02: with acute accent

.../03: with circumflex

.../04: with tilde

.../05: with diaeresis

.../06: circle above

.../07: with double acute accent

.../08: with caron

.../09: with breve

.../10: with macron

.../11: with dot above

.../12: with cedilla

.../13: with oblique stroke

.../14: with stroke soft hyphen

.../15: with stroke

.../16: with eta

.../17: diphthong ligature with E












.../18: special letters

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 3098-5:1997](https://standards.iteh.ai/catalog/standards/sist/9ee9aae1-427a-48d9-87f7-cf4462acff90/iso-3098-5-1997)

<https://standards.iteh.ai/catalog/standards/sist/9ee9aae1-427a-48d9-87f7-cf4462acff90/iso-3098-5-1997>

Table 3 — Upper-case letters and accents

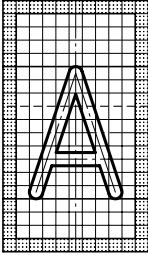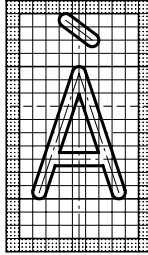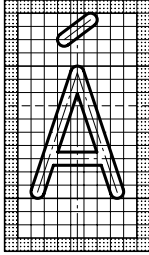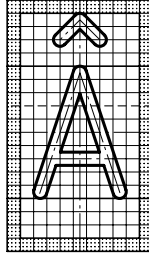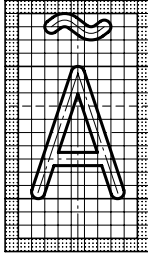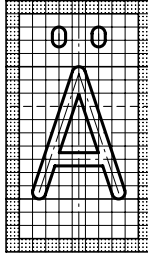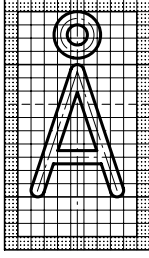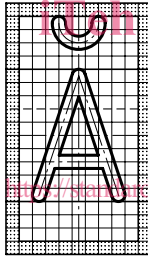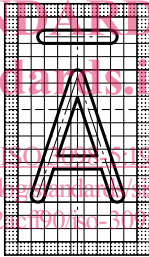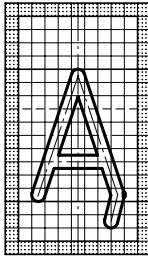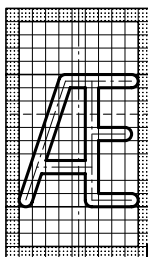 <p>001/00</p>	 <p>001/01</p>	 <p>001/02</p>	 <p>001/03</p>	 <p>001/04</p>
	 <p>001/05</p>	 <p>001/06</p>		
	 <p>001/09</p>	 <p>001/10</p>		 <p>001/12</p>
	 <p>001/17</p>			

ICH STANDARD PREVIEW
 (standards.iteh.ai)
 ISO 3098-5:1997
<https://standards.iteh.ai/catalog/standards/iso/9ee9aae1-427a-48d9-87f7-cf4462a1f000/iso-3098-5-1997>

Table 3 — Upper-case letters and accents (*continued*)

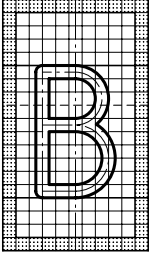
 <p>002/00</p>				
	<p>iTeh STANDARD PREVIEW (standards.iteh.ai)</p> <p>ISO 3098-5:1997 https://standards.iteh.ai/catalog/standards/sist/9ee9aac1-427a-48d9-87f7-cf4462acff90/iso-3098-5-1997</p>			

Table 3 — Upper-case letters and accents (continued)

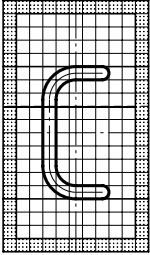
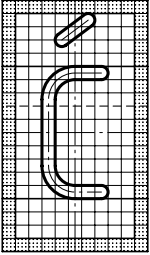
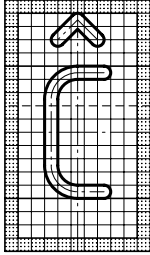
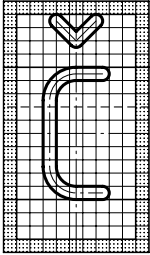
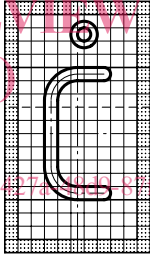
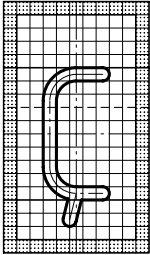
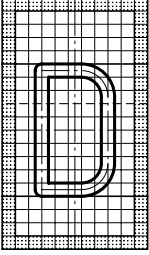
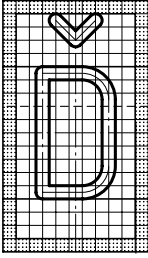
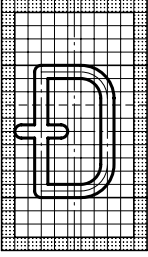
 <p>003/00</p>		 <p>003/02</p>	 <p>003/03</p>	
				 <p>003/08</p>
	<p>iTeh STANDARD PREVIEW (standards.iteh.ai) ISO 3098-5:1997 https://standards.iteh.ai/catalog/standards/sist/9ee9aae1-4772-4245-8377-cf4462acf90/iso-3098-5-1997</p>	 <p>003/11</p>		 <p>003/12</p>

Table 3 — Upper-case letters and accents (continued)

 <p>004/00</p>				
				 <p>004/08</p>
<p>iTeh STANDARD PREVIEW (standards.iteh.ai)</p> <p>ISO 3098-5:1997 https://standards.iteh.ai/catalog/standards/sist/9ee9aac1-427a-48d9-87f7-cf4462acff90/iso-3098-5-1997</p>				
			 <p>004/15</p>	