

# INTERNATIONAL STANDARD

# ISO 3842

Third edition  
2001-02-01

---

---

## Road vehicles — Fifth wheels — Interchangeability

*Véhicules routiers — Sellette d'attelage — Interchangeabilité*

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 3842:2001](https://standards.iteh.ai/catalog/standards/sist/7f61e289-5e18-48e2-95ff-885be792280e/iso-3842-2001)

<https://standards.iteh.ai/catalog/standards/sist/7f61e289-5e18-48e2-95ff-885be792280e/iso-3842-2001>



Reference number  
ISO 3842:2001(E)

© ISO 2001

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 3842:2001

<https://standards.iteh.ai/catalog/standards/sist/7f61e289-5e18-48e2-95ff-885be792280e/iso-3842-2001>

© ISO 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.ch](mailto:copyright@iso.ch)  
Web [www.iso.ch](http://www.iso.ch)

Printed in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 3842 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 15, *Interchangeability of components of commercial vehicles and buses*.

This third edition cancels and replaces the second edition (ISO 3842:1984), which has been technically revised.

ITEH STANDARD PREVIEW  
(standards.iteh.ai)

[ISO 3842:2001](https://standards.iteh.ai/catalog/standards/sist/7f61e289-5e18-48e2-95ff-885be792280e/iso-3842-2001)

<https://standards.iteh.ai/catalog/standards/sist/7f61e289-5e18-48e2-95ff-885be792280e/iso-3842-2001>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 3842:2001

<https://standards.iteh.ai/catalog/standards/sist/7f61e289-5e18-48e2-95ff-885be792280e/iso-3842-2001>

# Road vehicles — Fifth wheels — Interchangeability

## 1 Scope

This International Standard specifies the dimensional characteristics necessary for the mounting and interchangeability of the fifth wheel on the frame (subframe or mounting plate) of towing vehicles for semi-trailers. It is applicable to fifth wheels intended for hitching on semi-trailers equipped with a

- 50 kingpin as defined in ISO 337, or
- 90 kingpin as defined in ISO 4086.

Dimensions not specified are left to the discretion of the component manufacturer.

NOTE Those test conditions and strength requirements to be met by 50 and 90 fifth wheel couplings are specified in ISO 8717.

## 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards. <https://standards.iteh.ai/catalog/standards/sist/7f61e289-5e18-48e2-95ff-f51e9278060a/iso-3842-2001>

ISO 337, *Road vehicles — 50 semi-trailer fifth wheel coupling pin — Basic and mounting/interchangeability dimensions*.

ISO 1726, *Road vehicles — Mechanical coupling between tractors and semi-trailers — Interchangeability*.

ISO 4086:—<sup>1)</sup>, *Road vehicles — 90 semi-trailer fifth wheel kingpins — Basic and mounting/interchangeability dimensions*.

ISO 8717, *Commercial road vehicles — Fifth wheel couplings — Strength tests*.

## 3 General requirements

### 3.1 Fixing holes


#### 3.1.1 Frame

The position of the fixing holes on the frame shall be as shown in Figure 1.

#### 3.1.2 Fifth wheel coupling

The position of the fixing holes on the fifth wheel coupling shall be as shown in Figure 2.

1) To be published. (Revision of ISO 4086:1982)

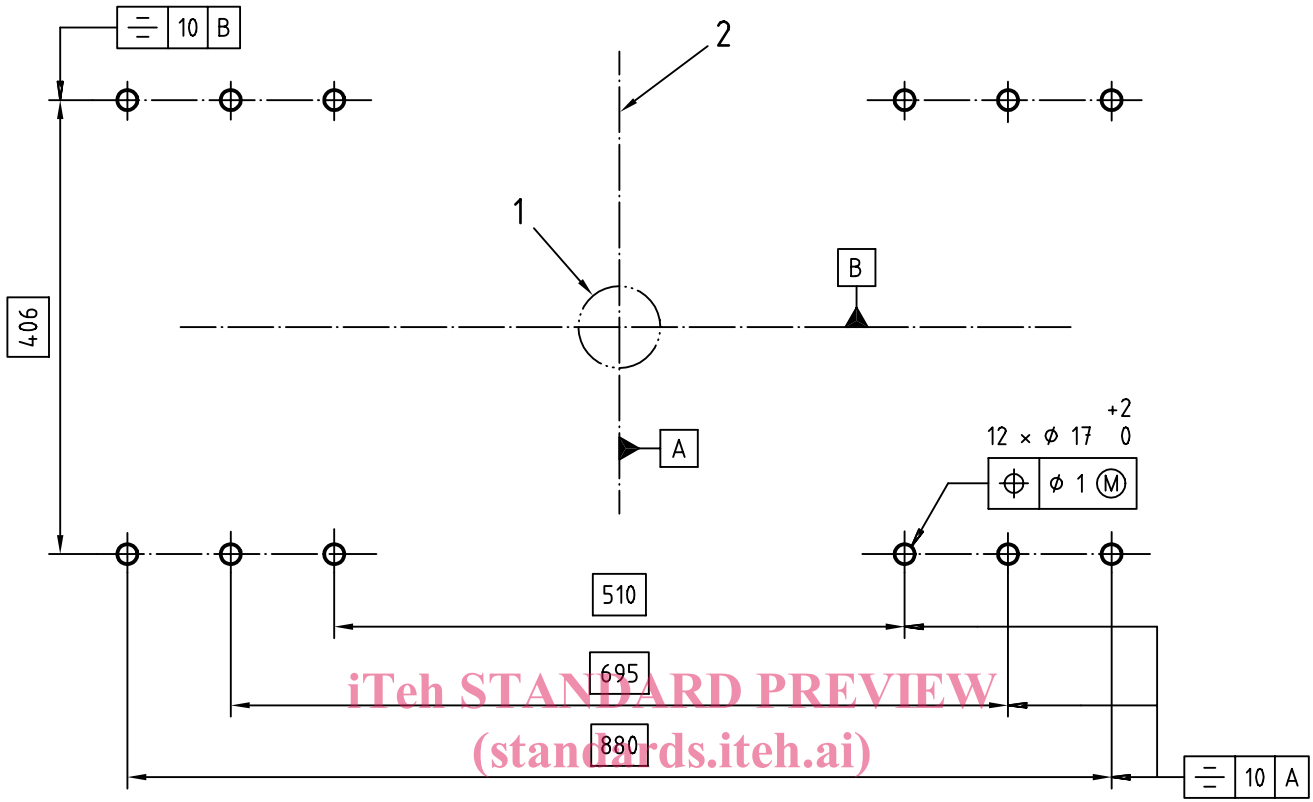

- Key**
- 1 Kingpin (in accordance with ISO 337 or ISO 4086)
  - 2 Longitudinal axis of towing vehicle

**Figure 1 — Dimensions and location of fixing holes on frame**

**3.2 Mounting**


The mounting for 50 mm fifth wheels (FW 50) shall be a minimum of eight bolts, size M16, minimum property class 8.8, placed symmetrically with respect to the longitudinal and transverse axes of the fifth wheel; 90 mm fifth wheels (FW 90) shall be bolted with 12 bolts, size M16, minimum property class 8.8.

**3.3 Inclination angles**

The longitudinal inclination of the fifth wheel not installed on the vehicle, but with bolts or nuts at the mounting brackets considered, shall be  $\pm 12^\circ$  min., as shown in Figure 2.

A lateral angle of  $\pm 3^\circ$  max. may be used (see ISO 1726) for fifth wheels conforming to this International Standard.

Dimensions in millimetres

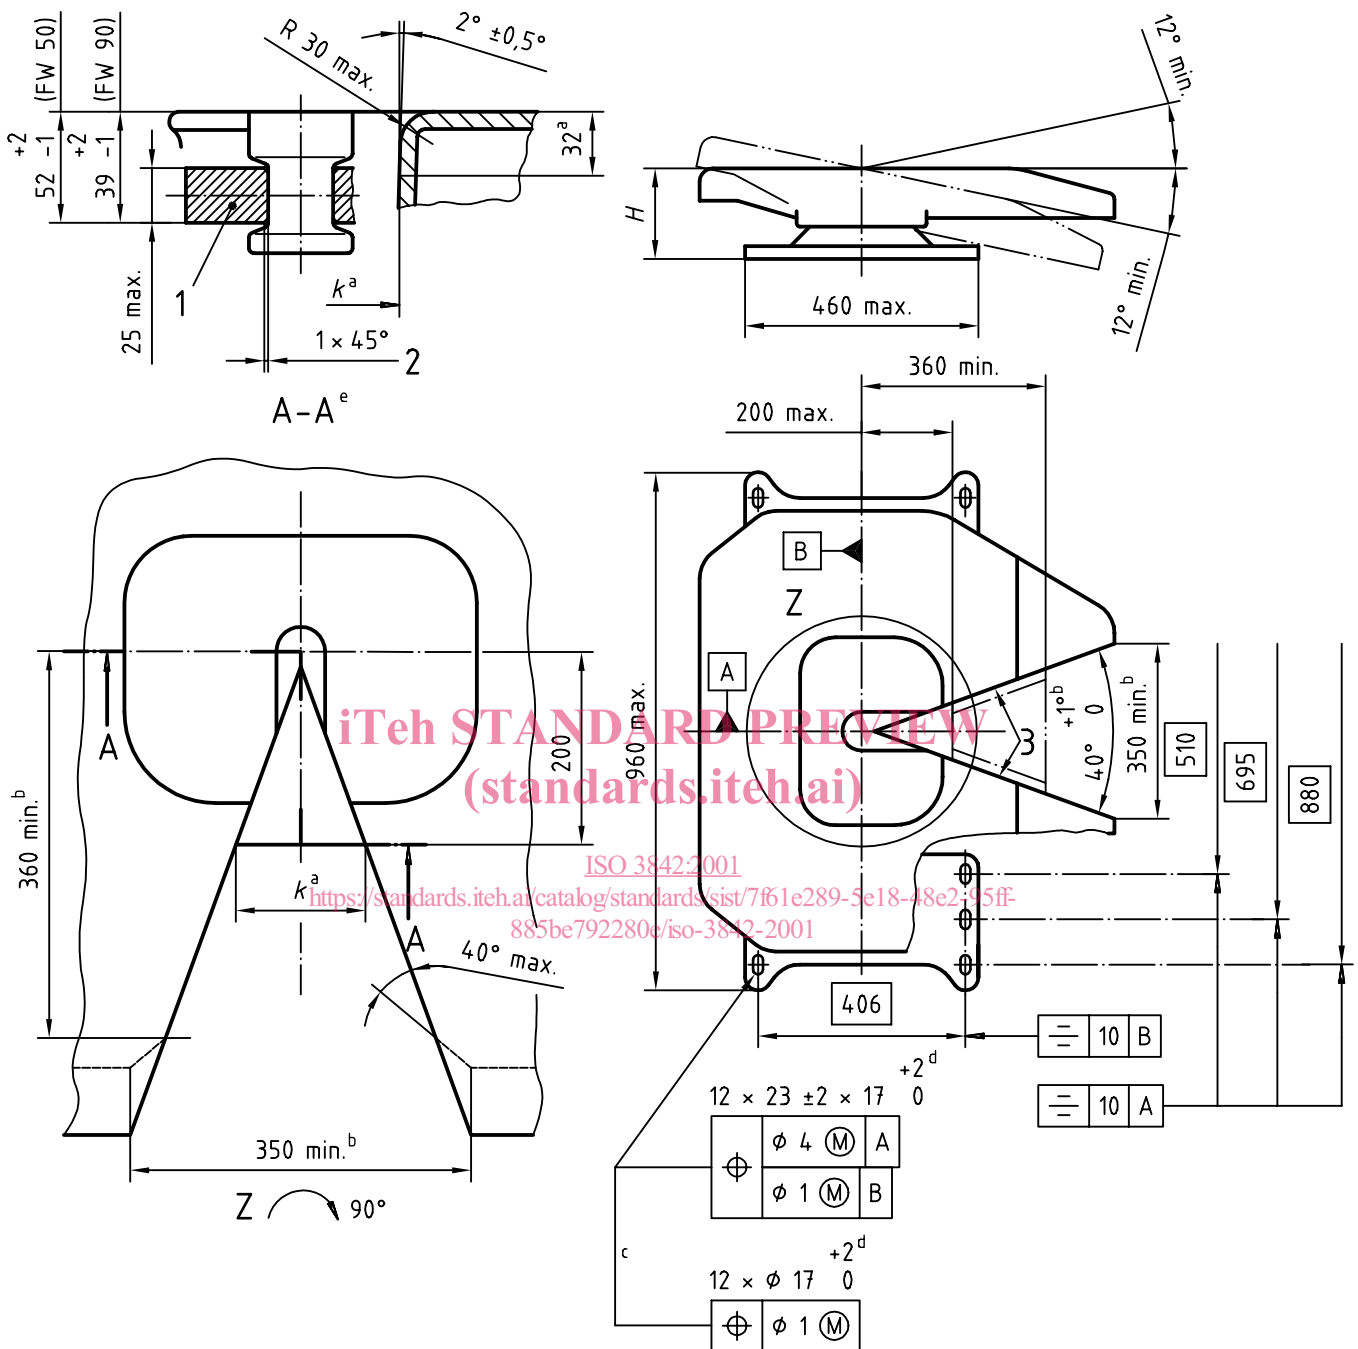

**Key**

- 1 Locking jaw
- 2 Chamfer on jaw
- 3 Bearing surface for steering wedge

<sup>a</sup> To provide for the use of steering wedges, measure the reference dimension  $k = (137 \pm 3)$  mm, 32 mm below the top face at a distance of 200 mm.

<sup>b</sup> The angle  $(40^{+1}_0)^\circ$  shall be realized for the length of at least 360 mm. The entry width 350 mm min. may alternatively be executed according to the dotted contour.

<sup>c</sup> Instead of elongated holes of  $(23 \pm 2)$  mm ×  $(17^{+2}_0)$  mm holes with  $\varnothing(17^{+2}_0)$  mm are also allowed.

<sup>d</sup> When using elongated holes or holes of  $> \varnothing 18$  mm, washers  $\varnothing 40$  mm × 6 mm thick or means of equal strength (e.g. flat steel plate) shall be used.

<sup>e</sup> Enlarged part with kingpin.

**Figure 2 — Dimensions of fifth wheels**

### 3.4 Height

The height,  $H$ , of the fifth wheel coupling shall be within one of the classes specified in Table 1.

**Table 1 — Classes of fifth wheel height**

Dimensions in millimetres

Fifth wheel	Class 1	Class 2	Class 3	Class 4	Class 5	Class 6
Range $H$	140 to 159	160 to 179	180 to 199	200 to 219	220 to 239	240 to 260

### 3.5 Dimensions of standard fifth wheels

Standard fifth wheels shall have the dimensions given in Figure 2.

## 4 Designation

Fifth wheels meeting the requirements of this International Standard shall be identified by the following, in the order specified:

- reference to this International Standard;
- code FW 50 for 50 mm fifth wheels and FW 90 for 90 mm fifth wheels;
- number of class of fifth wheel height,  $H$ , according to Table 1.

EXAMPLE 1 50 mm fifth wheel coupling having a height within the range of class 1:

**Fifth wheel ISO 3842 FW 50-1**

EXAMPLE 2 90 mm fifth wheel coupling having a height within the range of class 4:

**Fifth wheel ISO 3842 FW 90-4**

<https://standards.iteh.ai/catalog/standards/sist/7f61e289-5e18-48e2-95ff-885be792280e/iso-3842-2001>  
 (standards.iteh.ai)



**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 3842:2001

<https://standards.iteh.ai/catalog/standards/sist/7f61e289-5e18-48e2-95ff-885be792280e/iso-3842-2001>