
Bicycle tyres and rims —

Part 1:

Tyre designations and dimensions

Pneumatiques et jantes pour cycles —

Partie 1: Désignation et cotes des pneumatiques

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 5775-1:1997

<https://standards.iteh.ai/catalog/standards/sist/52dd78bd-7b44-4a8b-865c-cbcb6bc79786/iso-5775-1-1997>



Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 5775-1 was prepared by Technical Committee ISO/TC 31, *Tyres, rims and valves*, Subcommittee SC 10, *Cycle, moped, motorcycle tyres and rims*.

This fifth edition cancels and replaces the fourth edition (ISO 5775-1:1994), of which it constitutes a technical revision.

ISO 5775 consists of the following parts, under the general title *Bicycle tyres and rims*:

Part 1: Tyre designations and dimensions

Part 2: Rims

Annex A of this part of ISO 5775 is for information only.

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet central@iso.ch
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

Bicycle tyres and rims —

Part 1: Tyre designations and dimensions

1 Scope

This part of ISO 5775 specifies the designations and dimensions for pneumatic bicycle tyres:

- “wired edge” tyres mounted on straight side or crotchet type rims, and
- “beaded edge” tyres mounted on hooked bead rims.

Tubular sew-up tyres and non-pneumatic tyres are not covered by this part of ISO 5775.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 5775. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 5775 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 4223-1:—¹⁾, *Definitions of some terms used in the tyre industry — Part 1: Pneumatic tyres.*

ISO 5775-2:1996, *Bicycle tyres and rims — Part 2: Rims.*

3 Definitions

For the purposes of this part of ISO 5775, the definitions given in ISO 4223-1 apply.

1) To be published. (Revision of ISO 4223-1:1989)

4 “Wired edge” tyres mounted on straight side or crotchet type rims

NOTE — For tyres that can be mounted on both straight side and hooked bead rims, see 5.4.

4.1 Tyre designation

The tyre designation for straight side and crotchet type rims shall be shown on the sidewall of the tyre and shall include the marking given in 4.1.1 to 4.1.4.

4.1.1 Tyre size designation

The characteristics shall be indicated as follows:

Nominal section width	Tyre construction code	Nominal rim diameter
-----------------------	------------------------	----------------------

4.1.1.1 Nominal section width

The nominal section width of the tyre shall be expressed in millimetres.

4.1.1.2 Tyre construction code

The tyre construction code shall be a separated dash.

NOTE — Other codes will be established for new concepts of tyres.

4.1.1.3 Nominal rim diameter

The nominal rim diameter shall be expressed in millimetres.

4.1.2 Old marking

To help customers in those countries where other systems of marking were used, the old marking(s) may be added in parentheses before or after the tyre size designation.

It is suggested that characters smaller than those used for the designation specified in 4.1.1 be adopted. See annex A for correspondence between “tyre size designation” and “old markings”. Sizes not included in annex A shall bear the tyre size designation only.

4.1.3 Other service characteristics

4.1.3.1 In the case of tubeless tyres, the marking “TUBELESS” shall be shown on the tyre.

4.1.3.2 In the case of a preferred direction of rotation of the tyre, an arrow shall be used to indicate that direction.

4.1.3.3 Specific indications, if required, may be added to indicate

- a) the recommended or the maximum inflation pressure, in kilopascals;
- b) other characteristics.

4.1.4 Example

A tyre having nominal section width 32 mm, nominal rim diameter 597 mm and recommended inflation pressure of 400 kPa shall be marked as follows:

32 - 597 inflate to 400 kPa

4.2 Tyre dimensions

See figure 1 for tread and tyre dimensions.

4.2.1 Calculation of “design tyre” dimensions

4.2.1.1 Theoretical rim width, R_{th}

The theoretical rim width, R_{th} , is equal to the product of the nominal section width, S_N , by the rim/section ratio, K_1 :

$$R_{th} = K_1 S_N$$

NOTE — For tyres with $S_N \leq 30$, $K_1 = 0,65$. For tyres with $S_N > 30$, $K_1 = 0,55$.

4.2.1.2 Measuring rim width, R_m

The measuring rim width, R_m , is the width of the existing rim nearest to the theoretical rim width, R_{th} . See ISO 5775-2 for existing rim widths.

4.2.1.3 Design tyre section width, S

The design tyre section width, S , is the nominal section width, S_N , transferred from the theoretical rim width, R_{th} , to the measuring rim width, R_m :

$$S = S_N + K_2 (R_m - R_{th})$$

rounded to the nearest whole number.

NOTE — For tyres existing concepts, $K_2 = 0,4$

4.2.1.4 Design tyre section height, H

The design tyre section, H , is equal:

- to the nominal section width, S_N , when $S_N \geq 28$ mm;
- to the nominal section width, S_N , plus 2,5 mm when $S_N < 28$ mm.

4.2.1.5 Design tyre overall diameter, D_o

The design tyre overall diameter, D_o , is the sum of the nominal rim diameter, D_r , plus twice the design tyre section height, H :

$$D_o = D_r + 2H$$

Existing values of the nominal rim diameter, D_r , are given in ISO 5775-2.

4.2.2 Calculation of maximum tyre dimensions in service

The calculation is for use by vehicle manufacturers in designing for tyre clearance.

4.2.2.1 Maximum overall width in service, W_{\max}

The maximum overall width in service, W_{\max} , is equal to the design tyre section width, S , plus a value, as shown in table 1.

Table 1 — Maximum overall width in service

Dimensions in millimetres

Tyre type (see 4.3)	Nominal section width S_N	Maximum overall width in service W_{\max}
A	≤ 25	$S + 1$
	$25 < S_N \leq 35$	$S + 2$
	> 35	$S + 3$
D	all S_N	$S + 8$

This includes protective ribs, lettering, embellishments, manufacturing tolerances and growth due to service.

4.2.2.2 Maximum overall diameter in service, $D_{o,\max}$

The maximum overall diameter in service, $D_{o,\max}$, is equal to the nominal rim diameter, D_r , plus twice the design tyre section height, H , plus a value as follows:

$$D_{o,\max} = D_r + 2H + 6 \text{ mm for type A tyres;}$$

$$D_{o,\max} = D_r + 2H + 10 \text{ mm for type D tyres.}$$

This includes manufacturing tolerances and growth due to service.

4.2.2.3 Minimum overall width, S_{\min}

The minimum overall width, S_{\min} , is equal to the design tyre section width, S , plus a value, as shown in table 2.

Table 2 — Minimum overall width

Dimensions in millimetres

Nominal section width S_N	Minimum overall width S_{\min}
≤ 28	$S - 2$
> 28	$S - 3$

4.2.3 Values

Table 3 shows the dimensions for measuring rim width, design section width and design section height according to 4.2.1 for nominal section widths to be used.

Table 3 — “Wired edge” tyres mounted on straight side rims — Design tyre dimensions

Dimensions in millimetres

Nominal section width S_N	Measuring rim width ¹⁾ R_m	Design tyre	
		Section width S	Section height H
18	13C	18	20,5
20	13C	20	22,5
23	15C	23	25,5
25	15C	25	27,5
28	18	28	28
32	18	32	32
35	20	35	35
37	20	37	37
40	22	40	40
44	24	44	44
47	27	47	47
50	27	50	50
54	30,5	54	54
57	30,5	57	57
62	34 (30,5)	62 (61)	62

1) For dimensions of measuring rims, see ISO 5775-2. [ISO 5775-1:1997](https://standards.iteh.ai/catalog/standards/sist/52dd78bd-7b44-4a8b-865c-cbc66bc79786/iso-5775-1-1997)

<https://standards.iteh.ai/catalog/standards/sist/52dd78bd-7b44-4a8b-865c-cbc66bc79786/iso-5775-1-1997>

4.3 Tread configurations

Figure 1 shows two principal tread configurations which apply to bicycle tyres.

Tread type A corresponds to highway service tyres.

Tread type D corresponds to tyres for on-and-off road service tyres (e.g. mountain bikes).

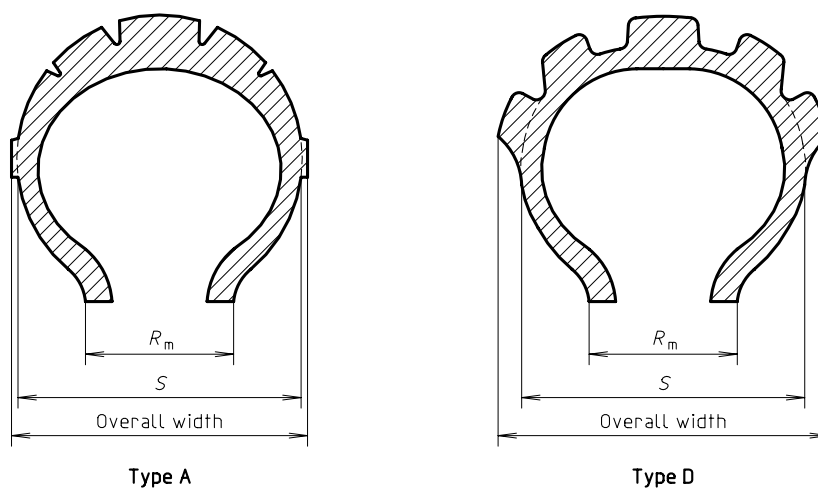


Figure 1 — Tread configurations

4.4 Tyre dimension measurement method

Before measuring, tyres shall be mounted on the measuring rim, inflated to the recommended inflation pressure and allowed to stand for a minimum of 24 h at normal room temperature, after which the inflation pressure shall be readjusted to the original value.

4.5 Recommended rim contours

The recommended straight side and crotchet type rim contours correlated to nominal tyre section widths, S_N , are presented in table 4.

When inflation pressures over 500 kPa are used, appropriate rim tapes shall be fitted.

When mounting the tyre on a permitted rim, the section width of the tyre varies by 0,4 times the difference between the recommended and permitted rim widths.

NOTES

- 1 For tyres for foldable bicycles, consult the tyre manufacturer for the types of rims permitted.
- 2 Rim dimensions and bead seat characteristics are given in ISO 5775-2.

4.6 Minimum inflation pressure

The deflection of the tyre in use shall not exceed 30 % of the tyre section height. The tyre inflation pressure shall not be less than:

- 300 kPa for narrow tyres (i.e. with nominal section width 25 and below);
- 200 kPa for other sizes in normal highway service;
- 150 kPa for off-the-road service.

Table 4 — “Wired edge” tyres mounted on straight side and crotchet type rims — Recommended rims

Dimensions in millimetres

Nominal section width S_N	Recommended rims ¹⁾	
	Straight side rims	Crotchet type rims
16	—	13C
18	—	13C
20	—	13C
23	16	13C; 15C
25	16; 18	13C; 15C; 17C
28	16; 18; 20	15C; 17C; 19C
32	16; 18; 20	15C; 17C; 19C
35	18; 20; 22	17C; 19C; 21C
37	18; 20; 22	17C; 19C; 21C
40	20; 22; 24	19C; 21C; 23C
44	20; 22; 24; 27	19C; 21C; 23C; 25C
47	20; 22; 24; 27	19C; 21C; 23C; 25C
50	22; 24; 27; 30.5	21C; 23C; 25C
54	27; 30.5	25C
57		25C
62		—

1) Crotchet type rims shall be used when tyre inflation pressures over 500 kPa are recommended.

5 “Beaded edge” tyres mounted on hooked bead rims

5.1 Tyre designation

The tyre designation for hooked bead rims shall be shown on the sidewall of the tyre and shall include the marking given in 5.1.1 to 5.1.3.

5.1.1 Tyre size designation

The characteristics shall be indicated as follows:

Overall diameter code	x	Nominal section width code
-----------------------------	---	----------------------------------

5.1.1.1 Overall diameter code

The overall diameter code shall be in whole even numbers.

5.1.1.2 Symbol “x”

The symbol “x” shall be included between the code corresponding to the overall diameter and the code corresponding to the nominal section.

5.1.1.3 Nominal section width code

The nominal section width code shall be expressed in hundredths or thousandths, ending in 5 (for example 1.375).

5.1.2 Preferred direction of rotation

In the case of a preferred direction of rotation of the tyre, an arrow shall be used to indicate that direction.

5.1.3 Example

A tyre having overall diameter code 20 and nominal section width code 1.375 shall be marked as follows:

20 x 1.375

5.2 Tyre dimensions

See figure 1 for tread and tyre dimensions.

5.2.1 “Design tyre” dimensions

5.2.1.1 Measuring rim width, R , and design dimensions

Table 5 gives the measuring rim width, R_m , the design tyre section width, S , and the design tyre section height, H , for a given nominal section width code.