

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 3547-2:2002

<https://standards.iteh.ai/catalog/standards/sist/a7cbcec1-df0e-47f7-84c3-9bffdff9a15e/sist-iso-3547-2-2002>

Plain bearings — Wrapped bushes —

Part 2:

Test data for outside and inside diameter

Paliers lisses — Bagues roulées —

Partie 2: Données d'essai pour le diamètre extérieur et le diamètre intérieur

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 3547-2:2002](https://standards.iteh.ai/catalog/standards/sist/a7cbcec1-dff0e-47f7-84c3-9bffdff9a15e/sist-iso-3547-2-2002)

<https://standards.iteh.ai/catalog/standards/sist/a7cbcec1-dff0e-47f7-84c3-9bffdff9a15e/sist-iso-3547-2-2002>



Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 3547-2 was prepared by Technical Committee ISO/TC 123, *Plain bearings*, Subcommittee SC 3, *Dimensions, tolerances and construction details*.

This first edition of ISO 3547-2, together with ISO 3547-1, ISO 3547-3 and ISO 3547-4, cancels and replaces ISO 3547:1976 the technical content of which has been revised and augmented.

ISO 3547 consists of the following parts, under the general title *Plain bearings — Wrapped bushes*:

— Part 1: *Dimensions*

— Part 2: *Test data for outside and inside diameter*

— Part 3: *Lubrication holes, lubrication grooves and lubrication indentations*

— Part 4: *Materials*

iTeh STANDARD PREVIEW
(standards.iteh.ai)
SIST ISO 3547-2:2002
<https://standards.iteh.ai/catalog/standards/sist/a7cbcec1-df0e-47f7-84c3-9bffdff9a15e/sist-iso-3547-2-2002>

© ISO 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet iso@iso.ch

Printed in Switzerland

Introduction

Wrapped bushes are not inherently stable when they are in their free condition. After they have been pressed into the bore of the housing, they tend to take up the shape of this bore due to the interference between the outside diameter of the bush and the bore of the housing. For this reason the outside diameter and the inside diameter of wrapped bushes can only be checked with special gauges and test equipment. Thus special test data are required on the drawing to enable this checking to be done.

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 3547-2:2002

<https://standards.iteh.ai/catalog/standards/sist/a7cbcec1-dff0e-47f7-84c3-9bffdff9a15e/sist-iso-3547-2-2002>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 3547-2:2002

<https://standards.iteh.ai/catalog/standards/sist/a7cbcec1-df0e-47f7-84c3-9bffdff9a15e/sist-iso-3547-2-2002>

Plain bearings — Wrapped bushes —

Part 2:

Test data for outside and inside diameter

1 Scope

This part of ISO 3547 specifies test data for outside and inside diameters of wrapped bushes made of solid and multilayer bearing material for application as plain bearings. It also specifies test designations.

Since the wall thickness of the bush is measured in the free condition, no special test data are required for this on the drawing (see ISO 12307-1 and ISO 12307-2).

NOTE Depending on the manufacturing method the back of the bushes may show isolated light depressions and similarly bushes with lubrication holes, grooves and bore indentations may show distortion. The wall thickness must therefore be measured away from these areas.

ITeH STANDARD PREVIEW
(standards.iteh.ai)

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 3547. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 3547 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 3547-1:1999, *Plain bearings — Wrapped bushes — Part 1: Dimensions*.

ISO 3547-4:1999, *Plain bearings — Wrapped bushes — Part 4: Materials*.

ISO 4378-1, *Plain bearings — Terms, definitions and classification — Part 1: Design, bearing materials and their properties*.

ISO 12307-1, *Plain bearings — Checking of wrapped bushes — Part 1: Checking the outside diameter*.

ISO 12307-2:—¹⁾, *Plain bearings — Checking of wrapped bushes — Part 2: Checking the inside diameter*.

ISO 12301, *Plain bearings — Quality control techniques and inspection of geometrical and material quality characteristics*.

ISO 13715, *Technical drawings — Edges of undefined shape — Vocabulary and indication on drawings*.

3 Term and definition

For the purposes of this part of ISO 3547 the definition of a wrapped bush as given in ISO 4378-1 applies.

¹⁾ To be published.

4 Symbols and units

See Table 1 and Figure 1.

Table 1 — Symbols and units

Symbol	Term	Unit
A_{cal}	Reduced area of cross section (calculated value) of the bush	mm ²
B	Nominal width of the bush	mm
C_i	Inside chamfer	mm
C_o	Outside chamfer	mm
D_i	Nominal inside diameter of the bush	mm
$D_{i,ch}$	Inside diameter of the bush in the ring gauge	mm
D_o	Nominal outside diameter of the bush	mm
F_{ch}	Test force	N
d_{ch}	Diameter of the checking block $d_{ch,1}$ and setting mandrel $d_{ch,2}$	mm
s_1	Thickness of the steel layer ^a	mm
s_2	Thickness of the bearing material layer ^a	mm
s_3	Wall thickness ^a	mm
T	Tolerance of D_o	mm
v	Elastic reduction of the outside diameter under test force F_{ch}	mm
z	Distance apart of the halves of the test housing	mm
Δz	Indicator reading	mm
Δz_D	Circumference indicator reading for test D	mm
^a	For bushes which are made of a single material $s_1 = s_3$ or $s_2 = s_3$	


5 Notes pertaining to the data shown on the drawing

The drawing should show:

- outside diameter D_o and wall thickness s_3 , or
- outside diameter D_o and inside diameter D_i .

In no case shall the wall thickness s_3 and the inside diameter D_i both be specified as dimensions that should be checked.

Dimensions in millimetres

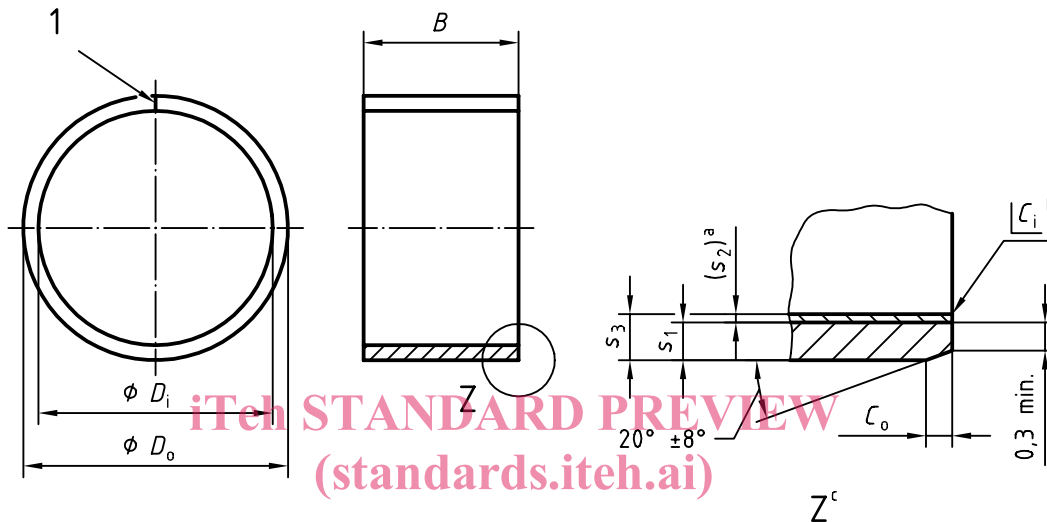

Key

1 Split

SIST ISO 3547-2:2002
<https://standards.itech.ai/catalog/standards/sist/a7cbcec1-df0e-47f7-84c3-9bffdff9a15e/sist-iso-3547-2-2002>

- a Thickness of the bearing material layer: only valid as a basis for calculation in accordance with ISO 3547-1.
- b C_i can be a radius or a chamfer, in accordance with ISO 13715.
- c Shown on a bush made out of a multilayer material.

Figure 1

6 Types of test

6.1 Test A

Checking the outside diameter D_o in a test rig with checking block and setting mandrel as specified in clause 7.

6.2 Test B

Checking the outside diameter D_o with two ring gauges as specified in clause 8.

6.3 Test C

Checking the inside diameter D_i of a bush pressed into a ring gauge as specified in clause 9.

6.4 Test D

Checking the outside diameter D_o by precision measuring tape as specified in clause 10.