
Aeronavtika – Vijaki, zaobljena valjasta glava, križna zareza, polno steblo, ozka toleranca, kratek navoj, iz titanove zlitine, anodizirani, z aluminijem pigmentiranim premazom – Klasifikacija: 1 100 MPa (pri temperaturi okolice) / 315 °C

Aerospace series - Screws, pan head, offset cruciform recess, close tolerance normal shank, short thread, in titanium alloy, anodized, with aluminium pigmented coating - Classification: 1 100 MPa (at ambient temperature) / 315 °C

Luft- und Raumfahrt - Flachkopf-Passschrauben, mit Flügelkreuzschlitz, kurzes Gewinde, aus Titanlegierung, anodisiert, mit aluminium pigmentierter Beschichtung - Klasse: 1 100 MPa (bei Raumtemperatur) / 315 °C

Série aéronautique - Vis à tête cylindrique, à empreinte cruciforme déportée, fut normal à tolérance serrée, filetage court, en alliage de titane, anodisées, avec revêtement aluminé-organique - Classification : 1 100 MPa (à température ambiante) / 315 °C

Ta slovenski standard je istoveten z: EN 4497:2005

ICS:

49.025.20	Aluminij	Aluminium
49.025.30	Titan	Titanium
49.030.20	Sorniki, vijaki, stebelni vijaki	Bolts, screws, studs

SIST EN 4497:2006

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 4497:2006

<https://standards.iteh.ai/catalog/standards/sist/57ef8e86-9366-4690-aaa7-70680cb388c6/sist-en-4497-2006>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 4497

December 2005

ICS 49.030.20

English Version

**Aerospace series - Screws, pan head, offset cruciform recess,
close tolerance normal shank, short thread, in titanium alloy,
anodized, with aluminium pigmented coating - Classification: 1
100 MPa (at ambient temperature) / 315 °C**

Série aérospatiale - Vis à tête cylindrique, à empreinte
cruciforme déportée, fût normal à tolérance serrée, filetage
court, en alliage de titane, anodisées, avec revêtement
alumino-organique - Classification : 1 100 MPa (à
température ambiante) / 315 °C

Luft- und Raumfahrt - Flachkopf-Paßschrauben, mit
Flügelkreuzschlitz, kurzes Gewinde, aus Titanlegierung,
anodisiert, mit Aluminium pigmenttete Beschichtung -
Klasse: 1 100 MPa (bei Raumtemperatur) / 315 °C

This European Standard was approved by CEN on 26 October 2005.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents	Page
Foreword	3
1 Scope	4
2 Normative references	4
3 Required characteristics	5
4 Designation	8
5 Marking	8
6 Technical specification.....	9
7 Oversized bolts	9

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 4497:2006

<https://standards.iteh.ai/catalog/standards/sist/57ef8e86-9366-4690-aaa7-70680cb388c6/sist-en-4497-2006>

Foreword

This European Standard (EN 4497:2005) has been prepared by the European Association of Aerospace Manufacturers - Standardization (AECMA-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2006, and conflicting national standards shall be withdrawn at the latest by June 2006.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

ITeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 4497:2006

<https://standards.iteh.ai/catalog/standards/sist/57ef8e86-9366-4690-aaa7-70680cb388c6/sist-en-4497-2006>

EN 4497:2005 (E)**1 Scope**

This standard specifies the characteristics of screws, pan head, offset cruciform recess, close tolerance normal shank, short thread, in titanium alloy, anodized, with aluminium pigmented coating.

Classification: 1 100 MPa ¹⁾ / 315 °C ²⁾

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3353-1, *Aerospace — Lead and runout threads — Part 1: Rolled external threads.*

ISO 5855-2, *Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts.*

ISO 7913, *Aerospace — Bolts and screws, metric — Tolerances of form and position.*

ISO 7994, *Aerospace — Internal drive, offset cruciform recess (Torq-Set®) for rotary fastening devices — Metric series.*

ISO 9152, *Aerospace — Bolts, with MJ threads, in titanium alloys, strength class 1 100 MPa — Procurement specification.*

EN 2424, *Aerospace series — Marking of aerospace products.*

EN 4016, *Aerospace series — Oversized bolts.*³⁾

EN 4474, *Aerospace series — Aluminium pigmented coatings — Coating methods.*³⁾

EN 9100, *Aerospace series — Quality management systems — Requirements (based on ISO 9001:2000) and Quality systems — Model for quality assurance in design, development, production, installation and servicing (based on ISO 9001:1994).*

EN 9133, *Aerospace series — Quality management systems — Qualification Procedure for aerospace standard parts.*

MIL-L-87132B, *Lubricant, Cetyl Alcohol, 1-Hexadecanol, Application to Fasteners.*⁴⁾

TR 3775, *Aerospace series — Bolts and pins — Materials.*⁵⁾

1) Minimum tensile strength of the material at ambient temperature.

2) Maximum temperature that the screw can withstand without continuous change in its original characteristics, after return to ambient temperature. The maximum temperature is determined by the coating.

3) Published as AECMA Prestandard at the date of publication of this standard.

4) Published by: Department of Defense (DoD), the Pentagon, Washington, D.C.20301, USA.

5) Published as AECMA Technical Report at the date of publication of this standard.

3 Required characteristics

3.1 Configuration – Dimensions – Masses

See Figure 1 and Table 1.

Dimensions and tolerances are expressed in millimetres and apply after coating (tolerance on shank diameter before coating is also specified).

Details of form not stated are left to the manufacturer's discretion.

3.2 Tolerances of form and position

See ISO 7913

3.3 Materials

See TR 3775 (titanium alloy, strength class 1 100 MPa)

3.4 Surface treatments

See EN 4474

Lubrication with cetylic alcohol (chlorine free) according to MIL-L-87132

ITih STANDARD PREVIEW
(standards.iteh.ai)


SIST EN 4497:2006

<https://standards.iteh.ai/catalog/standards/sist/57ef8e86-9366-4690-aaa7-70680cb388c6/sist-en-4497-2006>

EN 4497:2005 (E)

$\sqrt{3,2}$ $\left[\sqrt{0,8} \right]$ Values in micrometres apply prior to surface treatment.

Break sharp edges 0,1 to 0,4.

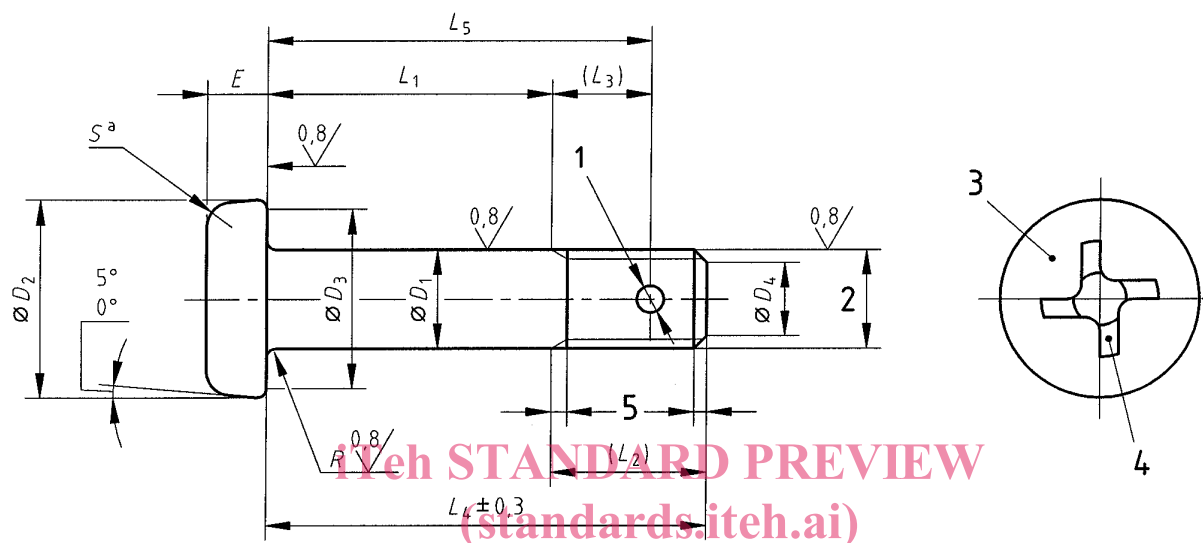

SIST EN 4497:2006
<https://standards.iteh.ai/catalog/standards/sist/57ef8e86-9366-4690-aaa7-70680cb388c6/sist-en-4497-2006>

Key

- 1 One hole diameter D_5 (optional)
- 2 Thread
- 3 Marking
- 4 Drive: see Table 3.
- 5 Conforms to ISO 3353-1
- ^a Shape optional

Figure 1

Table 1

Diameter code	Thread ^a	nom.	D_1		D_2 0 - 0,3	D_3 min.	D_4		D_5 H13	E	
			before coating	after coating			nom.	Tol.		nom.	Tol.
030	MJ3×0,5-4h6h	3	- 0,026 - 0,041	- 0,006 - 0,031	6	4,7	2,3	0 - 0,5	—	1,8	0 - 0,2
040	MJ4×0,7-4h6h	4	- 0,030 - 0,045	- 0,010 - 0,035	8	6,7	3	± 0,5	1,1	2,4	0 - 0,2
050	MJ5×0,8-4h6h	5			10	8,7	3,4		1,5	3	
060	MJ6×1-4h6h	6	- 0,033 - 0,048	- 0,013 - 0,038	12	10,7	4,2		1,9	3,6	0 - 0,3
070	MJ7×1-4h6h	7			14	12,7	5,2			4,2	
080	MJ8×1-4h6h	8			16	14,7	6,2		2,4	4,8	
100	MJ10×1,25-4h6h	10			20	18,7	7,9			6	
120	MJ12×1,25-4h6h	12			24	22,7	9,8			7,2	

Diameter code	$L_1 \pm 0,2$ ^{b c}		L_2	L_3	R		S		Mass ^d	
	Code	nom.			nom.	Tol.	max.	min.	e	f
030	002 to 030	2 to 30	6	—	0,4	0 - 0,2	1,2	0,3	0,38	0,03
040	002 to 040	2 to 40	7,5	5	0,5		1,6	0,4	0,92	0,06
050	003 to 050	3 to 50	9	6	0,5		2	0,5	1,88	0,08
060	003 to 060	3 to 60	10	7	0,5		2,4	0,6	3,10	0,12
070	004 to 070	4 to 70	11	7	0,7		2,8	0,7	5,31	0,17
080	004 to 080	4 to 80	11,5	7,5	0,7		3,2	0,8	7,23	0,22
100	005 to 100	5 to 100	14,5	9	0,8		4	1	14,24	0,35
120	006 to 120	6 to 120	16	10	0,9	0 - 0,3	4,8	1,2	25,17	0,50

^a In accordance with ISO 5855-2, except the thread major diameter " d max." which shall be equal to D_1 min. - 0,025.

^b Increments:

- 1 for $L_1 \leq 30$
- 2 for $30 < L_1 \leq 100$
- 4 for $L_1 > 100$

^c If greater lengths are required, they shall be chosen using the above increments. The length code corresponds to length L_1 , completed by one or two zeros to the left, where necessary, to obtain a three digit code.

^d Approximate values (kg/1 000 pieces), calculated on the basis of $4,45 \text{ kg/dm}^3$, for information purposes only. They apply to screws without holes.

^e Value for head and first L_4

^f Increase for each additional millimetre of L_4 .