



SLOVENSKI STANDARD

SIST ISO 9982:1999

01-december-1999

Jermenski pogoni - Jermenice in mnogoterni klinasti jermeni za industrijsko uporabo - Profili PH, PJ, PK, PL in PM - Mere

Belt drives -- Pulleys and V-ribbed belts for industrial applications -- PH, PJ, PK, PL and PM profiles: dimensions

iTeh STANDARD PREVIEW

Transmissions par courroies -- Poulies et courroies striées pour des applications industrielles -- Dimensions -- Profils PH, PJ, PK, PL et PM

[SIST ISO 9982:1999](https://standards.iteh.ai/catalog/standards/sist/e09e081d-68c9-412c-9f71-11c8dd63f21/sist-iso-9982-1999)

Ta slovenski standard je istoveten z: ISO 9982:1998

ICS:

21.220.10	Jermenski pogoni in njihovi deli	Belt drives and their components
-----------	----------------------------------	----------------------------------

SIST ISO 9982:1999

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 9982:1999

<https://standards.iteh.ai/catalog/standards/sist/e09e081d-68c9-412c-9f71-11fe8dd63f21/sist-iso-9982-1999>

INTERNATIONAL STANDARD

**ISO
9982**

Second edition
1998-06-15

Belt drives — Pulleys and V-ribbed belts for industrial applications — PH, PJ, PK, PL and PM profiles: Dimensions

*Transmissions par courroies — Poulies et courroies striées pour
des applications industrielles — Profils PH, PJ, PK, PL et PM: Dimensions*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 9982:1999](https://standards.iteh.ai/catalog/standards/sist/e09e081d-68c9-412c-9f71-11fe8dd63f21/sist-iso-9982-1999)

<https://standards.iteh.ai/catalog/standards/sist/e09e081d-68c9-412c-9f71-11fe8dd63f21/sist-iso-9982-1999>



ISO 9982:1998(E)**Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 9982 was prepared by Technical Committee ISO/TC 41, *Pulleys and belts (including veebelts)*, Subcommittee SC 1, *Veebelts and grooved pulleys*.

This second edition cancels and replaces the first edition (ISO 9982:1991), which has been technically revised. In particular, one subclause on the diameters over balls and another on the manufacturing tolerances for effective lengths of V-ribbed belts have been added.

Annex A of this International Standard is for information only.

© ISO 1998

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet iso@iso.ch

Printed in Switzerland

Introduction

A V-ribbed belt drive is composed of an endless belt with a longitudinally ribbed traction surface which engages and grips, by friction, pulley grooves of similar shape. The belt ribbed surface fits the pulley grooves to make nearly total contact.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ISO 9982:1999](https://standards.iteh.ai/catalog/standards/sist/e09e081d-68c9-412c-9f71-11fe8dd63f21/sist-iso-9982-1999)

<https://standards.iteh.ai/catalog/standards/sist/e09e081d-68c9-412c-9f71-11fe8dd63f21/sist-iso-9982-1999>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 9982:1999

<https://standards.iteh.ai/catalog/standards/sist/e09e081d-68c9-412c-9f71-11fe8dd63f21/sist-iso-9982-1999>

Belt drives — Pulleys and V-ribbed belts for industrial applications — PH, PJ, PK, PL and PM profiles: Dimensions

1 Scope

This International Standard specifies the principal dimensional characteristics of V-ribbed pulley groove profiles, together with the corresponding endless V-ribbed belts, of PH, PJ, PK, PL and PM profiles which are used for general industrial applications.

The PK belt was originally established for automotive accessory drive applications and ISO 9981 deals specifically with that particular field.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of the publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.


ISO 254:1998, *Belts drives — Pulleys — Quality, finish and balance.*

ISO 4287:1997, *Geometrical product specification (GPS) — Surface texture: Profile method — Terms, definitions and surface texture parameters.*

3 Pulleys

3.1 Groove dimensions and tolerances


The groove dimensions of PH, PJ, PK, PL and PM belts are shown in figures 1 and 2, and given in table 1.

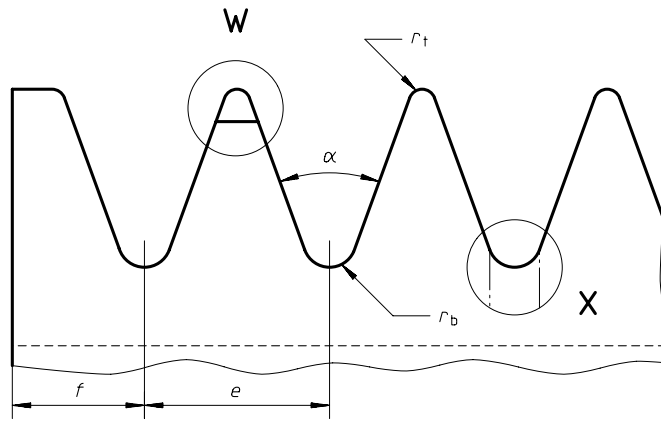

W

Alternative: Pulley tip profile

The actual configuration of the tip profile may lie anywhere between the maximum and minimum indicated. Any configuration shall have a transitional radius r_t corresponding to a 30° minimum arc tangent to the groove sidewall

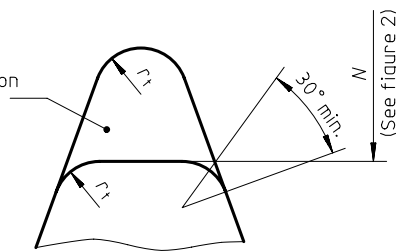

iTeh STANDARD PREVIEW

Alternative: Pulley groove bottom

(standards.itteh.ai)

SIST ISO 9982:1999
 The configuration of the groove bottom below r_b is optional
<https://standards.itteh.ai/catalog/standards/sist/e09e081d-68c9-412c-9f71-11fe8dd63f21/sist-iso-9982-1999>





Figure 1 — Cross-section of pulley grooves

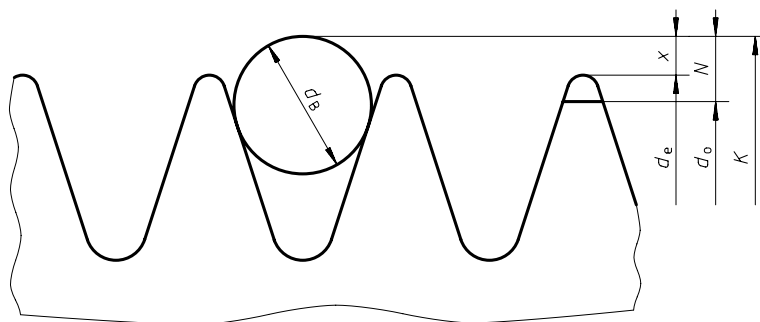

- d_e = effective diameter
- d_o = outer diameter
- K = diameter over balls or rods
- d_B = checking ball or rod diameter

Figure 2 — Pulley diameters

Table 1 — Dimensions of pulley grooves

Dimensions in millimetres

Profile		PH	PJ	PK	PL	PM
Groove pitch, e ^{1) 2)}		$1,6 \pm 0,03$	$2,34 \pm 0,03$	$3,56 \pm 0,05$	$4,7 \pm 0,05$	$9,4 \pm 0,08$
Groove angle, α ³⁾	$\pm 0,5^\circ$	40°	40°	40°	40°	40°
r_t	min.	0,15	0,2	0,25	0,4	0,75
r_b	max.	0,3	0,4	0,5	0,4	0,75
Checking ball or rod diameter, d_B	$\pm 0,01$	1	1,5	2,5	3,5	7
$2x$	nom.	0,11	0,23	0,99	2,36	4,53
$2N$ ⁴⁾	max.	0,69	0,81	1,68	3,5	5,92
f	min.	1,3	1,8	2,5	3,3	6,4

- 1) The tolerance on e applies to the distance between the axes of two consecutive grooves.
2) The sum of all deviations from the nominal value e for all grooves in any pulley shall not exceed $\pm 0,3$.
3) The centreline of the groove shall make an angle of $90^\circ \pm 0,5^\circ$ with the axis of the pulley.
4) N is not related to the nominal diameter of the pulley but is measured from the actual ride position of the ball or rod in the pulley.

STANDARD PREVIEW
(standards.iteh.ai)

3.2 Minimum effective diameter

SIST ISO 9982:1999

The minimum recommended effective diameter, d_e , for V-ribbed pulleys is given in table 2.

Table 2 — Minimum effective diameter

Dimensions in millimetres

Profile		PH	PJ	PK	PL	PM
Effective diameter, d_e	min.	13	20	45	75	180

3.3 Tolerances on finished pulley

3.3.1 Checking conditions

Profile, diameter and run-out tolerances shall be checked on the finished pulley without surface coating.

3.3.2 Groove-to-groove diameter tolerances

The variation in diameters between the grooves in any one pulley shall be within the limits given in table 3. This variation is obtained by comparing the diameter over balls or rods.