



SLOVENSKI STANDARD
SIST ES 202 391-3 V1.3.1:2008

01-september-2008

Odprti dostop do storitve (OSA) - Spletne storitve Parlay X - 3. del: Priglasitev klica (Parlay X 2)

Open Service Access (OSA) - Parlay X Web Services - Part 3: Call Notification (Parlay X 2)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ES 202 391-3 V1.3.1:2008](https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-4438eac38cb5/sist-es-202-391-3-v1-3-1-2008)

[https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-](https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-4438eac38cb5/sist-es-202-391-3-v1-3-1-2008)

[4438eac38cb5/sist-es-202-391-3-v1-3-1-2008](https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-4438eac38cb5/sist-es-202-391-3-v1-3-1-2008)

Ta slovenski standard je istoveten z: ES 202 391-3 Version 1.3.1

ICS:

35.100.01	Medsebojno povezovanje odprtih sistemov na splošno	Open systems interconnection in general
-----------	--	---

SIST ES 202 391-3 V1.3.1:2008 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ES 202 391-3 V1.3.1:2008](https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-4438eac38cb5/sist-es-202-391-3-v1-3-1-2008)

<https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-4438eac38cb5/sist-es-202-391-3-v1-3-1-2008>

ETSI ES 202 391-3 V1.3.1 (2008-05)

ETSI Standard

**Open Service Access (OSA);
Parlay X Web Services;
Part 3: Call Notification
(Parlay X 2)**



**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST ES 202 391-3 V1.3.1:2008](https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-4438eac38cb5/sist-es-202-391-3-v1-3-1-2008)

<https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-4438eac38cb5/sist-es-202-391-3-v1-3-1-2008>



Reference

RES/TISPAN-01056-03-OSA

Keywords

API, OSA, service

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ES 202 391-3 V1.3.1:2008

<https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-4438eac38c07/sist/es-202-391-3-v1-3-1-2008>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2008.

© The Parlay Group 2008.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™**, **TIPHON™**, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	5
Foreword.....	5
1 Scope	6
2 References	6
2.1 Normative references	6
3 Definitions and abbreviations.....	7
3.1 Definitions	7
3.2 Abbreviations	7
4 Detailed service description	7
5 Namespaces.....	7
6 Sequence diagrams	8
6.1 SMS notification of a missed call.....	8
7 XML Schema data type definition	8
7.1 ActionValues enumeration	8
7.2 Action structure	9
7.3 CallEvents enumeration	9
8 Web Service interface definition.....	9
8.1 Interface: CallDirection	9
8.1.1 Operation: handleBusy	10
8.1.1.1 Input message: handleBusyRequest	10
8.1.1.2 Output message: handleBusyResponse	10
8.1.1.3 Referenced faults.....	10
8.1.2 Operation: handleNotReachable	10
8.1.2.1 Input message: handleNotReachableRequest	10
8.1.2.2 Output message: handleNotReachableResponse	11
8.1.2.3 Referenced faults.....	11
8.1.3 Operation: handleNoAnswer	11
8.1.3.1 Input message: handleNoAnswerRequest	11
8.1.3.2 Output message: handleNoAnswerResponse	11
8.1.3.3 Referenced faults.....	11
8.1.4 Operation: handleCalledNumber	11
8.1.4.1 Input message: handleCalledNumberRequest	12
8.1.4.2 Output message: handleCalledNumberResponse	12
8.1.4.3 Referenced faults.....	12
8.2 Interface: CallNotification.....	12
8.2.1 Operation: notifyBusy.....	12
8.2.1.1 Input message: notifyBusyRequest	12
8.2.1.2 Output message: notifyBusyResponse	12
8.2.1.3 Referenced faults.....	12
8.2.2 Operation: notifyNotReachable	12
8.2.2.1 Input message: notifyNotReachableRequest	13
8.2.2.2 Output message: notifyNotReachableResponse	13
8.2.2.3 Referenced faults.....	13
8.2.3 Operation: notifyNoAnswer.....	13
8.2.3.1 Input message: notifyNoAnswerRequest	13
8.2.3.2 Output message: notifyNoAnswerResponse	13
8.2.3.3 Referenced faults.....	13
8.2.4 Operation: notifyCalledNumber	13
8.2.4.1 Input message: notifyCalledNumberRequest	13
8.2.4.2 Output message: notifyCalledNumberResponse	14
8.2.4.3 Referenced faults.....	14

8.3	Interface: CallDirectionManager	14
8.3.1	Operation: startCallDirectionNotification.....	14
8.3.1.1	Input message: startCallDirectionNotificationRequest	14
8.3.1.2	Output message: startCallDirectionNotificationResponse	14
8.3.1.3	Referenced Faults.....	14
8.3.2	Operation: stopCallDirectionNotification.....	15
8.3.2.1	Input message: stopCallDirectionNotificationRequest	15
8.3.2.2	Output message: stopCallDirectionNotificationResponse	15
8.3.2.3	Referenced Faults.....	15
8.4	Interface: CallNotificationManager.....	15
8.4.1	Operation: StartCallNotification	15
8.4.1.1	Input message: startCallNotificationRequest	15
8.4.1.2	Output message: startCallNotificationResponse	15
8.4.1.3	Referenced Faults.....	16
8.4.2	Operation: stopCallNotification.....	16
8.4.2.1	Input message: stopCallNotificationRequest	16
8.4.2.2	Output message: stopCallNotificationResponse	16
8.4.2.3	Referenced Faults.....	16
9	Fault definitions.....	16
10	Service policies	16
Annex A (normative):	WSDL for Call Notification	17
Annex B (informative):	Bibliography.....	18
History		19

ITeH STANDARD PREVIEW
(standards.iteh.ai)

[SIST ES 202 391-3 V1.3.1:2008](https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-4438eac38cb5/sist-es-202-391-3-v1-3-1-2008)

<https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-4438eac38cb5/sist-es-202-391-3-v1-3-1-2008>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This ETSI Standard (ES) has been produced by ETSI Technical Committee Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN).

The present document is part 3 of a multi-part deliverable covering Open Service Access (OSA); Parlay X Web Services, as identified below:

Part 1: "Common";

Part 2: "Third Party Call";

Part 3: "Call Notification";

Part 4: "Short Messaging";

Part 5: "Multimedia Messaging";

Part 6: "Payment"; <https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-4438eac38cb5/sist-es-202-391-3-v1-3-1-2008>

Part 7: "Account Management";

Part 8: "Terminal Status";

Part 9: "Terminal Location";

Part 10: "Call Handling";

Part 11: "Audio Call";

Part 12: "Multimedia Conference";

Part 13: "Address List Management";

Part 14: "Presence".

The present document has been defined jointly between ETSI, The Parlay Group (<http://www.parlay.org>) and the 3GPP.

The present document forms part of the Parlay X 2.2 set of specifications.

The present document is equivalent to 3GPP TS 29.199-03 V6.6.0 (Release 6).

1 Scope

The present document is part 3 of the Stage 3 Parlay X 2 Web Services specification for Open Service Access (OSA).

The OSA specifications define an architecture that enables application developers to make use of network functionality through an open standardized interface, i.e. the OSA APIs.

The present document specifies the Call Notification Web Service. The following are defined here:

- Name spaces.
- Sequence diagrams.
- Data definitions.
- Interface specification plus detailed method descriptions.
- Fault definitions.
- Service Policies.
- WSDL Description of the interfaces.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

For online referenced documents, information sufficient to identify and locate the source shall be provided. Preferably, the primary source of the referenced document should be cited, in order to ensure traceability. Furthermore, the reference should, as far as possible, remain valid for the expected life of the document. The reference shall include the method of access to the referenced document and the full network address, with the same punctuation and use of upper case and lower case letters.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

- [1] W3C Recommendation (2 May 2001): "XML Schema Part 2: Datatypes".

NOTE: Available at: <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>.

- [2] ETSI ES 202 391-1: "Open Service Access (OSA); Parlay X Web Services; Part 1: Common (Parlay X 2)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ES 202 391-1 [2] apply.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in ES 202 391-1 [2] apply.

4 Detailed service description

Currently, in order to determine the handling of a subscriber initiated call in telecommunication networks we have to write applications using specific protocols to access Call Control functions provided by network elements. This approach requires a high degree of network expertise. We can also use the OSA gateway approach, invoking standard interfaces to gain access to call control capabilities, but these interfaces are usually perceived to be quite complex by application IT developers. Developers must have advanced telecommunication skills to use Call Control OSA interfaces.

iTeh STANDARD PREVIEW

In this clause we will describe a Parlay X 2 Web Service, Call Notification, for handling calls initiated by a subscriber in the network. A (third party) application determines how the call should be treated. The overall scope of this Web Service is to provide simple functions to application developers to determine how a call should be treated. Using the Web Services, application developers can perform simple handling of network-initiated calls without specific Telco knowledge.

<https://standards.iteh.ai/catalog/standards/sist/cc0c199b-7889-4331-9b2a-4438eac38cb5/sist-es-202-391-3-v1-3-1-2008>

Examples of usage include the following:

Incoming call handling: A subscriber receives a call while he is logged-on to the Internet. Since this occupies his telephone connection, he is regarded as busy by the network. The subscriber has an application that is invoked when somebody tries to call him while he is busy. The application provides the subscriber with a list of choices on how to handle the call (e.g. route the call to voicemail, redirect the call to a secretary, reject the call). Based on the response of the subscriber the call is handled in the network. Alternatively, the call is re-routed or released depending on the preferences of the subscriber and some context information (e.g. based on the status or location of the subscriber).

Service numbers: An application is triggered whenever a certain service number is dialled. This number is used to connect the caller to one of the maintenance personnel. The application redirects the call to the appropriate maintenance person based on, e.g. calling party number, time, location and availability of the maintenance personnel.

SMS notification of missed calls: An application offers the subscriber the possibility to be notified via SMS whenever he misses a call. The application registers to be notified when calls to its subscribers encounter busy, no-answer or not-reachable. The application does not influence the call treatment, but sends an SMS containing the calling party number, the time and reason why the call was missed.

5 Namespaces

The CallDirection interface uses the namespace:

http://www.csapi.org/wsdl/parlayx/call_direction/v2_3

The CallDirectionNotificationManager interface uses the namespace:

http://www.csapi.org/wsdl/parlayx/call_direction/notification_manager/v2_5

The CallNotification interface uses the namespace:

http://www.csapi.org/wsdl/parlayx/call_notification/v2_3

The CallNotificationManager interface uses the namespace:

http://www.csapi.org/wsdl/parlayx/call_notification/notification_manager/v2_5

The data types are defined in the namespace:

http://www.csapi.org/schema/parlayx/call_notification/v2_2

The "xsd" namespace is used in the present document to refer to the XML Schema data types defined in XML Schema [1]. The use of the name "xsd" is not semantically significant.

6 Sequence diagrams

6.1 SMS notification of a missed call

Showing the use of the CallNotification and Short Messaging Web Services, an SMS is sent to a person who misses a call (no answer). This sequence assumes that the provisioning of the "no answer" call notification has occurred independently.

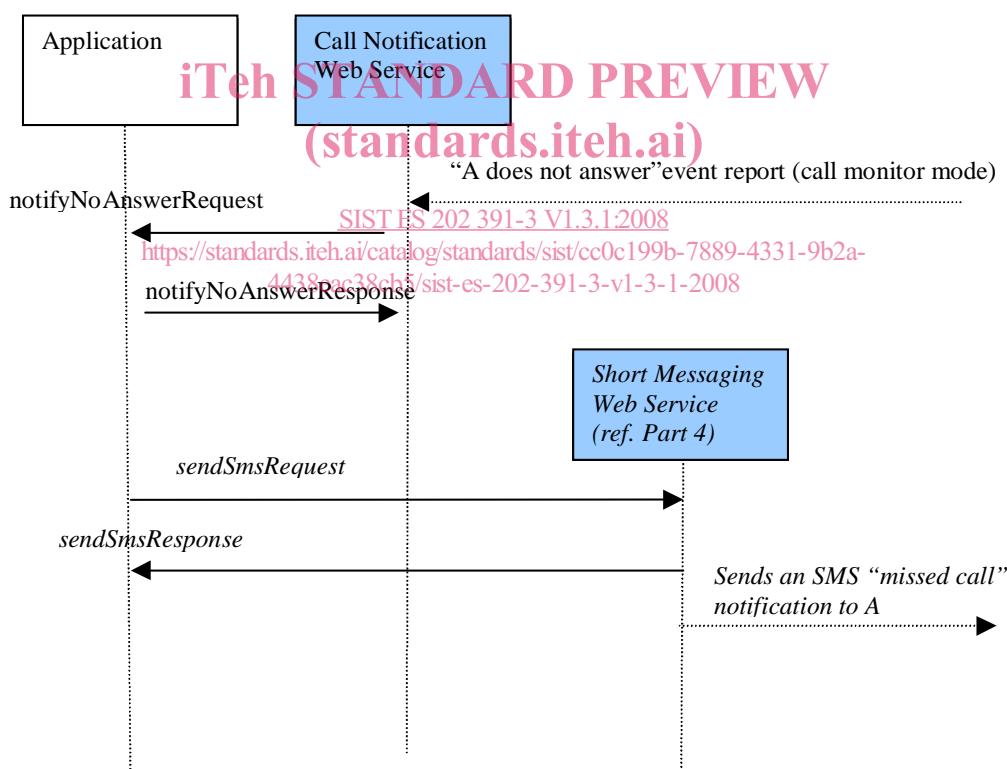


Figure 1

7 XML Schema data type definition

7.1 ActionValues enumeration

The **ActionValues** data type is an enumeration with the following values.

Enumeration value	Description
Route	Request to (re-)route the call to the address indicated with routingAddress.
Continue	Request to continue the call without any changes. This will result in normal handling of the event in the network.
EndCall	Request to end the call. This will result in termination of the call. The callingParty will receive a tone or announcement.

7.2 Action structure

The **Action** data type is a structure containing the following parameters.

Element name	Element type	Optional	Description
actionToPerform	ActionValues	No	Indicates the action as described below
routingAddress	xsd:anyURI	Yes	The address to be used in case the action indicates "Route"
charging	common:ChargingInformation	Yes	Charge to apply to this call

7.3 CallEvents enumeration

The **CallEvents** data type is an enumeration with the following values.

Enumeration value	Description
Busy	Called party is busy.
NotReachable	Called party is not reachable.
NoAnswer	Called party does not answer.
CalledNumber	A call between two parties is being attempted.

8 Web Service interface definition

8.1 Interface: CallDirection

This clause describes an initial set of capabilities in terms of message invocations, parameters and data types. The message-based invocations are:

- handleBusy.
- handleNotReachable.
- handleNoAnswer.
- handleCalledNumber.

These messages are initiated by the Call Notification Web Service (running in a Parlay X 2 Gateway) and invoke an application Web Service(s), as a result of activity in the network. The result of the invocation of a handle<Event> operation is used as an indication on how the call should be handled in the network. The application can not keep control over the call after handling the event; every event handling is a separate occurrence.

Note that because the results of the invocations of the application Web Service(s) determine call handling in the network, the names of the methods are prefixed with "handle", rather than "notify". The prefix "notify" would imply a more asynchronous behaviour, whereas "handle" shows the synchronous nature of these invocations.