

SLOVENSKI STANDARD

SIST EN 3646-011:2009

01-maj-2009

Aeronavtika - Konektorji, električni, okrogli, bajonetno sklapljanje, stalna delovna temperatura 175 °C ali 200 °C - 011. del: Slepa doza - Standard za proizvod

Aerospace series - Connectors, electrical, circular, bayonet coupling, operating temperature 175 °C or 200 °C continuous - Part 011: Dummy receptacle - Product standard

Luft- und Raumfahrt - Elektrische Rundsteckverbinder mit Bajonettkupplung, Betriebstemperatur 175 °C oder 200 °C konstant - Teil 011: Blinddose - Produktnorm

Série aérospatiale - Connecteurs électriques circulaires à accouplement par baïonnettes, température d'utilisation 175 °C ou 200 °C continu - Partie 011 : Embase de repos - Norme de produit

Ta slovenski standard je istoveten z: EN 3646-011:2006

ICS:

49.060	Letalska in vesoljska električna oprema in sistemi	Aerospace electric equipment and systems
--------	---	---

SIST EN 3646-011:2009

en,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3646-011:2009

<https://standards.iteh.ai/catalog/standards/sist/d3d27793-b324-4b6f-b7d6-73653b270d36/sist-en-3646-011-2009>

EUROPEAN STANDARD

EN 3646-011

NORME EUROPÉENNE

EUROPÄISCHE NORM

May 2006

ICS 49.060

English Version

Aerospace series - Connectors, electrical, circular, bayonet
coupling, operating temperature 175 °C or 200 °C continuous -
Part 011: Dummy receptacle - Product standard

Série aérospatiale - Connecteurs électriques circulaires à
accouplement par baïonnettes, température d'utilisation
175 °C ou 200 °C continu - Partie 011 : Embase de repos -
Norme de produit

Luft- und Raumfahrt - Elektrische Rundsteckverbinder mit
Bajonettkupplung, Betriebstemperatur 175 °C oder 200 °C
konstant - Teil 011: Blinddose - Produktnorm

This European Standard was approved by CEN on 6 February 2006.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents	Page
Foreword	3
1 Scope	4
2 Normative references	4
3 Terms and definitions	4
4 Required characteristics	4
5 Designation	7
6 Marking	7
7 Technical specification.....	8

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

SIST EN 3646-011:2009

<https://standards.iteh.ai/catalog/standards/sist/d3d27793-b324-4b6f-b7d6-73653b270d36/sist-en-3646-011-2009>

Foreword

This European Standard (EN 3646-011:2006) has been prepared by the European Association of Aerospace Manufacturers - Standardization (AECMA-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2006, and conflicting national standards shall be withdrawn at the latest by November 2006.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

ITh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3646-011:2009

<https://standards.iteh.ai/catalog/standards/sist/d3d27793-b324-4b6f-b7d6-73653b270d36/sist-en-3646-011-2009>

EN 3646-011:2006 (E)**1 Scope**

This standard defines the characteristics of dummy receptacles in the family of bayonet coupling circular connectors, intended for use in an operating temperature range of – 65 °C to 175 °C or 200 °C continuous.

It applies to models defined in Table 3.

For plugs associated with these dummy receptacles, see EN 3646-008.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 3646-001, *Aerospace series — Connectors, electrical, circular, bayonet coupling, operating temperature 175 °C or 200 °C continuous — Part 001: Technical specification.*¹⁾

EN 3646-002, *Aerospace series — Connectors, electrical, circular, bayonet coupling, operating temperature 175 °C or 200 °C continuous — Part 002: Specification of performance and contact arrangements.*

EN 3646-008, *Aerospace series — Connectors, electrical, circular, bayonet coupling, operating temperature 175 °C or 200 °C continuous — Part 008: Plug — Product standard.*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

3 Terms and definitions

For the purposes of this standard, the terms and definitions given in EN 3646-001 apply.

<https://standards.iteh.ai/catalog/standards/sist/d3d27793-b324-4b6f-b7d6-73653b270d36/sist-en-3646-011-2009>


4 Required characteristics**4.1 Dimensions and mass**

See Figure 1 and Table 1.

Dimensions and tolerances are in millimetres; they apply after surface treatment.

Interface dimensions, see EN 3646-001.

¹⁾ Published as AECMA Prestandard at the date of publication of this standard.

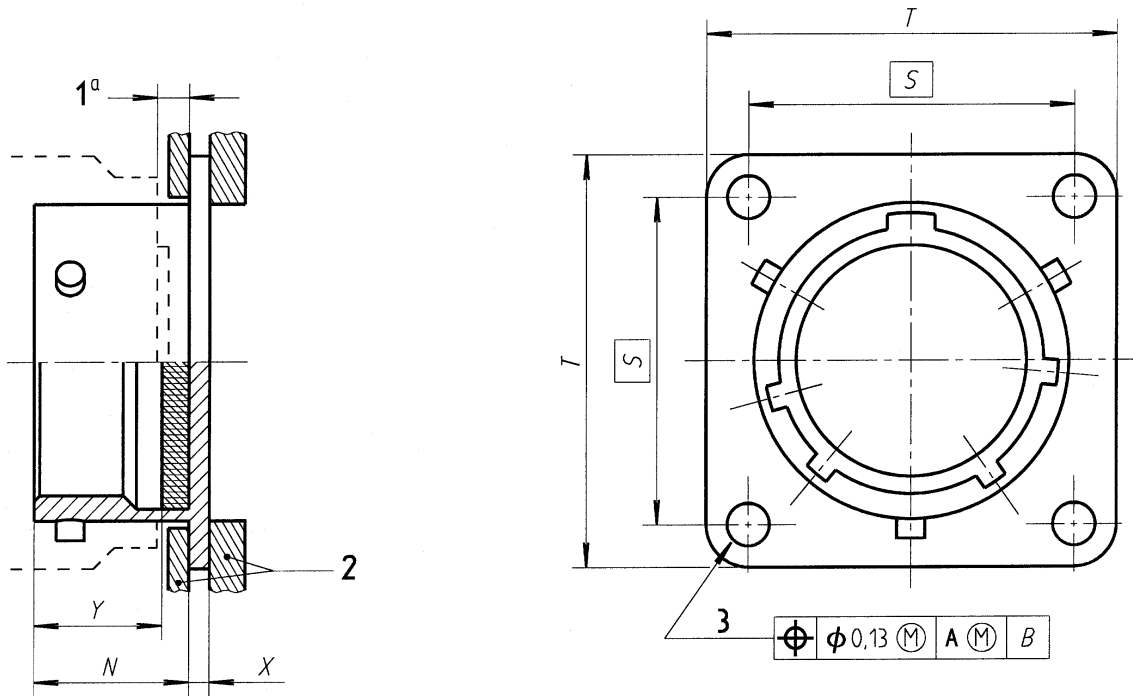**Key**

- 1 2,21 shells 08 to 18
 2 Panel
 3 Four holes diameter M

- ^a Maximum thickness of the support and the fixing screw heads for fitting the receptacle from the rear of the panel
^b See EN 3646-001, Figures 1 and 3, for references A and B.

Figure 1**Table 1**


Housing size	M $\pm 0,15$	N $+ 0,79$ 0	S	T max.	X	Y $+ 0,25$ $- 0,50$	Mass g max.
08	3,15	10,95	15,10	21,03	1,45 0,86	8,33	4
10			18,26	24,23			5
12			20,62	26,59			8
14			23,01	28,98			11
16			24,61	31,34			15
18			26,97	33,73			19
20	3,15	14,12	29,36	36,91	2,25 1,09	9,90	27
22			31,75	40,10			33
24			34,92	43,27			39

EN 3646-011:2006 (E)

4.2 Panel cut-out

Recommended panel cut-out: see Figure 2 and Table 2.

Dimensions and tolerances are in millimetres.

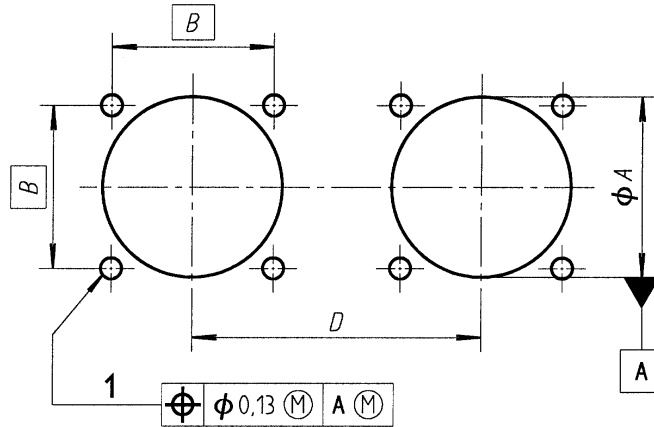

Key

- 1 Four holes diameter C

Figure 2 — Panel cut-out – Front and rear mounting
(standards.iteh.ai)

Table 2

Housing size	A^a $+0,25$ 0	B	C $\pm 0,15$	D min.
08	14,40	15,10	3,15	32
10	17,59	18,26		35
12	22,60	20,62		38
14	25,52	23,01		41
16	28,70	24,61		45
18	31,87	26,97		47
20	35,05	29,36		51
22	38,22	31,75		53
24	41,40	34,92	3,73	57

^a For mounting via the front of the panel through hole diameter A is not necessary.

4.3 Material and surface treatment

See Table 3.

4.4 Main general characteristics


See EN 3646-002.

4.5 Possible combinations of dummy receptacles and connectors

See EN 3646-002.

5 Designation

EXAMPLE

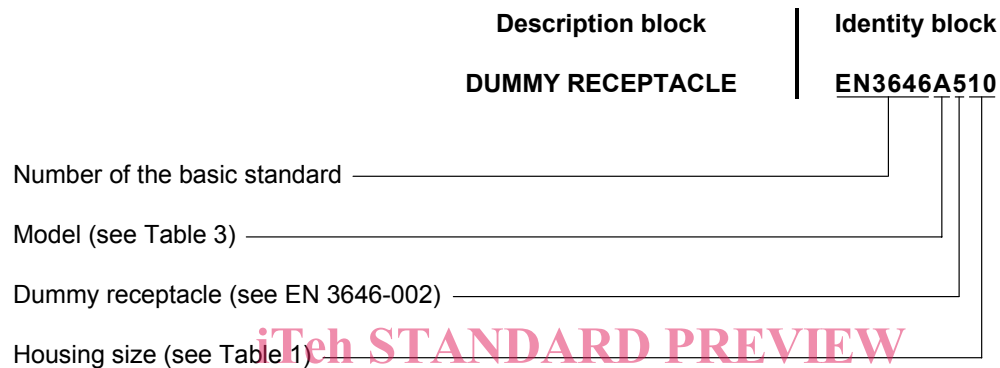

NOTE If necessary, the code I9005 shall be placed between the description block and the identity block.

Table 3 — Dummy receptacle cover models

Model	Description
A	Dummy receptacle in black anodized aluminium alloy – Maximum operating temperature 200 °C continuous
RS	Dummy receptacle in nickel-plated aluminium alloy – Maximum operating temperature 200 °C continuous
WS	Dummy receptacle in olive green cadmium plated aluminium alloy – Maximum operating temperature 175 °C continuous

6 Marking

Unless there are other specific contractual requirements, the marking shall include.

6.1 Marking on the product

- the manufacturer's part number corresponding to the identity block as defined in Clause 5;
- the date of manufacture (year, week);
- the manufacturer's name or trade mark.