



SLOVENSKI STANDARD

SIST ISO 15552:2005

01-november-2005

:`i]XbUHM b]_UËDbYj a Uj_ UËJU`n`c`qj]a]`df]fX]h]Ua]j]fghY`\$\$\$_DUf/\$`VUfL
]b`g`dfYa Yf]`&a a`Xc`&\$`a a`ËAYfYcgbcj bY[Uj U`U]b`b`Y[c j]`df]fX]h]j

Pneumatic fluid power -- Cylinders with detachable mountings, 1 000 kPa (10 bar) series, bores from 32 mm to 320 mm -- Basic, mounting and accessories dimensions

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Transmissions pneumatiques -- Vérins avec fixations détachables, série 1 000 kPa (10 bar), alésages de 32 mm à 320 mm -- Dimensions de base, des fixations et des accessoires
<https://standards.iteh.ai/catalog/standards/sist/4c5c210f-19de-450c-b007-e3c9628c6d63/sist-iso-15552-2005>

Ta slovenski standard je istoveten z: ISO 15552:2004

ICS:

23.100.20 Pāiā } āāā Cylinders

SIST ISO 15552:2005

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 15552:2005

<https://standards.iteh.ai/catalog/standards/sist/4c3e2f8f-f9dc-430c-b0b7-e3c9628c6d63/sist-iso-15552-2005>

INTERNATIONAL STANDARD

**ISO
15552**

First edition
2004-02-01

Pneumatic fluid power — Cylinders with detachable mountings, 1 000 kPa (10 bar) series, bores from 32 mm to 320 mm — Basic, mounting and accessories dimensions

Transmissions pneumatiques — Vérins avec fixations détachables, série 1 000 kPa, alésages de 32 mm à 320 mm — Dimensions de base, des fixations et des accessoires

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 15552:2005

<https://standards.iteh.ai/catalog/standards/sist/4c3e2f8f-f9dc-430c-b0b7-e3c9628c6d63/sist-iso-15552-2005>



Reference number
ISO 15552:2004(E)

© ISO 2004

ISO 15552:2004(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 15552:2005

<https://standards.iteh.ai/catalog/standards/sist/4c3e2f8f-f9dc-430c-b0b7-e3c9628c6d63/sist-iso-15552-2005>

© ISO 2004

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 15552 was prepared by Technical Committee ISO/TC 131, *Fluid power systems*, Subcommittee SC 3, *Cylinders*.

This first edition of ISO 15552 cancels and replaces ISO 6431:1992.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 15552:2005

<https://standards.iteh.ai/catalog/standards/sist/4c3e2f8f-f9dc-430c-b0b7-e3c9628c6d63/sist-iso-15552-2005>

Introduction

In pneumatic fluid power systems, power is transmitted and controlled through a gas under pressure within a circuit.

One component of such systems is the pneumatic cylinder. This is a device which converts power into linear mechanical force and motion. It consists of a movable element, i.e. a piston, and a piston rod, operating within a cylindrical bore.

To enable them to be fastened to user mechanisms, pneumatic cylinders comprise in addition some devices called “mountings”.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ISO 15552:2005](https://standards.iteh.ai/catalog/standards/sist/4c3e2f8f-f9dc-430c-b0b7-e3c9628c6d63/sist-iso-15552-2005)

<https://standards.iteh.ai/catalog/standards/sist/4c3e2f8f-f9dc-430c-b0b7-e3c9628c6d63/sist-iso-15552-2005>

Pneumatic fluid power — Cylinders with detachable mountings, 1 000 kPa (10 bar) series, bores from 32 mm to 320 mm — Basic, mounting and accessories dimensions

1 Scope

This International Standard established a metric series of basic, mounting and accessories dimensions as required for interchangeability of single- or double-rod pneumatic cylinders, with or without provision for magnetic sensors for a maximum rated pressure of 1 000 kPa (10 bar).

It is applicable to pneumatic cylinders with detachable mountings.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 273, *Fasteners — Clearance holes for bolts and screws*

[SIST ISO 15552:2005](http://www.iso.org/standards/std/62386/01e139c1b0b7e3c9628c6d63/sist-iso-15552-2005)

ISO 3320, *Fluid power systems and components — Cylinder bores and piston rod diameters — Metric series*

ISO 4393, *Fluid power systems and components — Cylinders — Basic series of piston strokes*

ISO 4395, *Fluid power systems and components — Cylinders — Piston rod thread dimensions and types*

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 6099, *Fluid power systems and components — Cylinders — Identification code for mounting dimensions and mounting types*

ISO 16030, *Pneumatic fluid power — Connections — Ports and stud ends*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598 apply.

4 Dimensions

4.1 Basic dimensions

The basic dimensions are given in Tables 1 and 2 and shown in Figures 1 and 2.

ISO 15552:2004(E)

4.2 Mounting dimensions

The mounting dimensions are given in Tables 3 to 8 and shown in Figures 3 to 8.

NOTE The sign + after letters means that the stroke is to be added to the actual dimension.

4.3 Accessories dimensions

The accessories dimensions are given in Tables 9 to 13 and shown in Figures 9 to 13.

NOTE The tolerances of dimensions dependent on stroke included in the tables apply for strokes up to and including 1 250 mm. If strokes are longer than 1 250 mm, tolerances should be selected from national standards or by agreement between the manufacturer and user.

5 Nominal stroke

5.1 The nominal strokes shall be selected from the recommended values given in ISO 4393; they are shown in Figure 14.

5.2 The nominal stroke tolerances are given in Table 14.

6 Bore sizes

Included in this series are the following bore sizes *AL*, in millimetres, in accordance with ISO 3320:

32 – 40 – 50 – 63 – 80 – 100 – 125 – 160 – 200 – 250 – 320

iTeh STANDARD PREVIEW
(standards.iteh.ai)
SIST ISO 15552:2005
<https://standards.iteh.ai/catalog/standards/sist/4c3e2f8f-f9dc-430c-b0b7-e3c9628c6d63/sist-iso-15552-2005>

7 Mounting types

This International Standard includes the following mounting types as described in ISO 6099:

- MF1 Head with rectangular flange (see Table 3, Figure 3);
- MF2 Cap with rectangular flange (see Table 3, Figure 3);
- MP2 Cap with detachable clevis (see Table 4, Figure 4);
- MP4 Cap with detachable eye (see Table 5, Figure 5);
- MP6 Cap with detachable eye with spherical bearing (see Table 6, Figure 6);
- MS1 End angles (see Table 7, Figure 7);
- MT4 Intermediate fixed or movable trunnion (see Table 8, Figure 8).

8 Accessory types

This International Standard includes the following accessory types as described in ISO 6099:

- AA4 Pivot pin, plain (see Table 9, Figure 9);
- AA6 Pivot pin, spherical bearing (see Table 10, Figure 10);

- AB6 Clevis bracket, spherical eye, straight (see Table 11, Figure 11);
- AB7 Eye bracket, in angle (see Table 12, Figure 12);
- AT4 Trunnion bracket (see Table 13, Figure 13).

9 Identification statement (Reference to this International Standard)

Use the following statement in test reports, catalogues and sales literature when electing to comply with this International Standard:


“Basic, mounting and accessories dimensions of pneumatic cylinders conform to ISO 15552:2004, *Pneumatic fluid power — Cylinders with detachable mountings, 1 000 kPa (10 bar) series, bores from 32 mm to 320 mm — Basic, mounting and accessories dimensions.*”

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 15552:2005](https://standards.iteh.ai/catalog/standards/sist/4c3e2f8f-f9dc-430c-b0b7-e3c9628c6d63/sist-iso-15552-2005)

<https://standards.iteh.ai/catalog/standards/sist/4c3e2f8f-f9dc-430c-b0b7-e3c9628c6d63/sist-iso-15552-2005>

ISO 15552:2004(E)

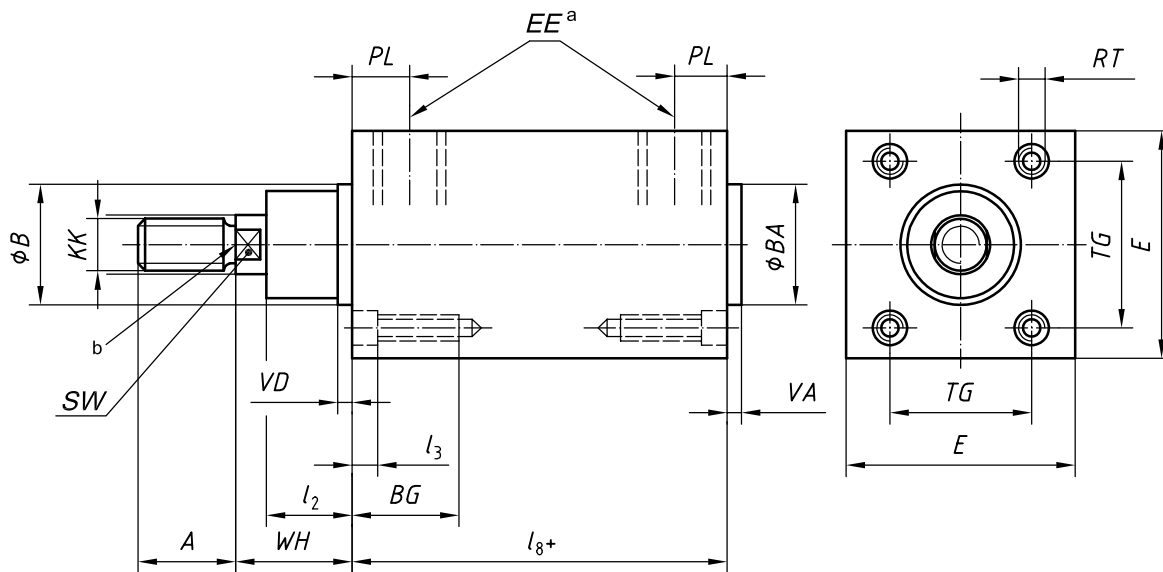

The cushion adjusting screw is placed on the same side as the port connection. The connecting port and the cushion adjusting screw shall be located within dimension E .

^a EE conforms to ISO 16030.

^b TRP (theoretical reference point).

Figure 1 — Basic dimensions — Single rod cylinder
(standards.iteh.ai)

SIST ISO 15552:2005


<https://standards.iteh.ai/catalog/standards/sist/4c3e2f8f-f9dc-430c-b0b7-e3c9628c6d63/sist-iso-15552-2005>

Table 1 — Basic dimensions — Single rod cylinder

Dimensions in millimetres

AL	A	B BA	BG	E	KK^a	l_2	l_3	l_8	PL	RT	SW	TG	VA	VD	WH
	0 -2	d11	min.	max.		nom. tol.	max.	nom. tol.	min.			nom. tol.	0 -1	min.	nom. tol.
32	22	30	16	50	M10 × 1,25	20	5	94 ± 0,4	13	M6	10	32,5 ± 0,5	4	4	26 ± 1,4
40	24	35	16	58	M12 × 1,25	22	5	105 ± 0,7	14	M6	13	38 ± 0,5	4	4	30 ± 1,4
50	32	40	16	70	M 16 × 1,5	29	5	106 ± 0,7	14	M8	17	46,5 ± 0,6	4	4	37 ± 1,4
63	32	45	16	85	M16 × 1,5	29	5	121 ± 0,8	16	M8	17	56,5 ± 0,7	4	4	37 ± 1,8
80	40	45	17	105	M20 × 1,5	35	0	128 ± 0,8	16	M10	22	72 ± 0,7	4	4	46 ± 1,8
100	40	55	17	130	M20 × 1,5	38	0	138 ± 1	18	M10	22	89 ± 0,7	4	4	51 ± 1,8
125	54	60	20	157	M27 × 2	50	0	160 ± 1	18	M12	27	110 ± 1,1	6	6	65 ± 2,2
160	72	65	24	195	M36 × 2	60	0	180 ± 1,1	25	M16	36	140 ± 1,1	6	6	80 ± 2,2
200	72	75	24	238	M36 × 2	70	0	180 ± 1,6	25	M16	36	175 ± 1,1	6	6	95 ± 2,2
250	84	90	25	290	M42 × 2	80	0	200 ± 1,6	31	M20	46	220 ± 1,5	10	10	105 ± 2,2
320	96	110	28	353	M48 × 2	90	0	220 ± 2,2	31	M24	55	270 ± 1,5	10	10	120 ± 2,2

^a According to ISO 4395.

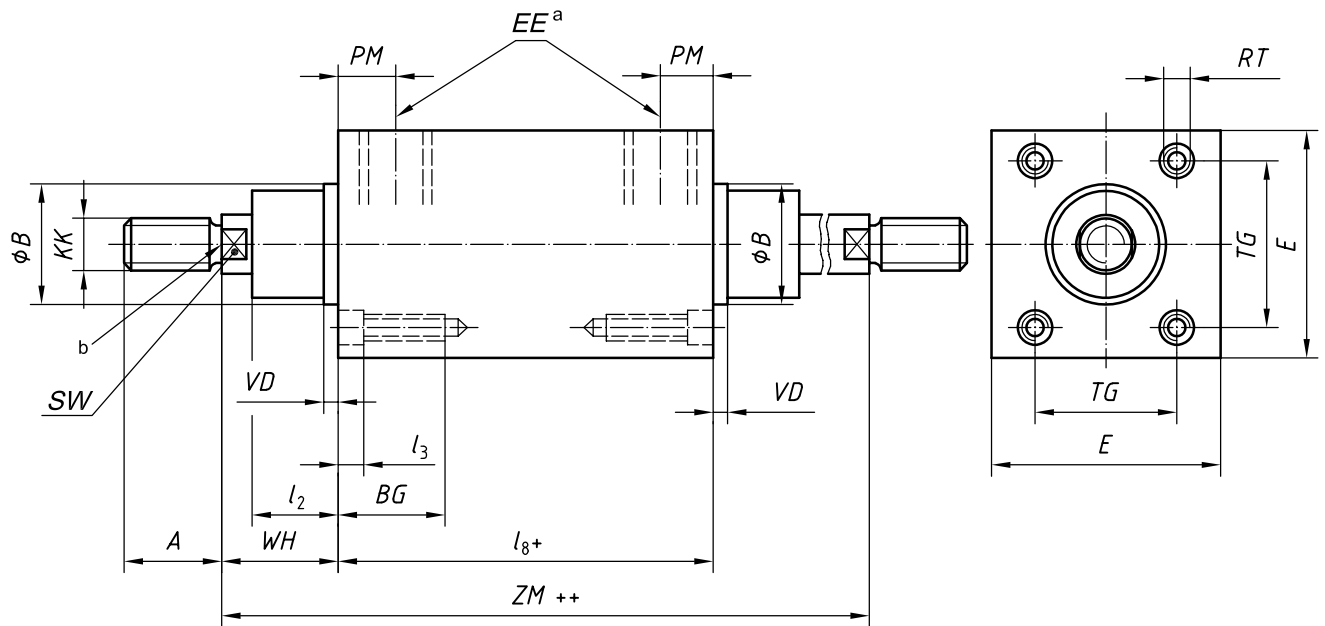

The cushion adjusting screw is placed on the same side as the port connection. The connecting port and the cushion adjusting screw shall be located within dimension E .

^a EE conforms to ISO 16030.

^b TRP (theoretical reference point).

Figure 2 — Basic dimensions — Double-rod cylinder

SIST ISO 15552:2005

<https://standards.iteh.ai/catalog/standards/sist/4c3e2f8f-f9dc-430c-b0b7-e3c9628c6d63/sist-iso-15552-2005>

Table 2 — Basic dimensions — Double-rod cylinder

Dimensions in millimetres

AL	A 0 -2	B d11	BG min.	E max.	KK ^a	l ₂		l ₃ max.	l ₈		PM min.	RT	SW	TG		VD min.	WH		ZM	
						nom.	tol.		nom.	tol.				nom.	tol.		nom.	tol.	nom.	tol.
32	22	30	16	50	M10 × 1,25	20		5	94	± 0,4	13	M6	10	32,5	± 0,5	4	26	± 1,4	146	
40	24	35	16	58	M12 × 1,25	22		5	105	± 0,7	14	M6	13	38	± 0,5	4	30	± 1,4	165	
50	32	40	16	70	M16 × 1,5	29		5	106	± 0,7	14	M8	17	46,5	± 0,6	4	37	± 1,4	180	+3,0 -1,5
63	32	45	16	85	M16 × 1,5	29		5	121	± 0,8	16	M8	17	56,5	± 0,7	4	37	± 1,8	195	
80	40	45	17	105	M20 × 1,5	35		0	128	± 0,8	16	M10	22	72	± 0,7	4	46	± 1,8	220	
100	40	55	17	130	M20 × 1,5	38		0	138	± 1	18	M10	22	89	± 0,7	4	51	± 1,8	240	
125	54	60	20	157	M27 × 2	50		0	160	± 1	18	M12	27	110	± 1,1	6	65	± 2,2	290	+3,5 -2,0
160	72	65	24	195	M36 × 2	60		0	180	± 1,1	25	M16	36	140	± 1,1	6	80	± 2,2	340	
200	72	75	24	238	M36 × 2	70		0	180	± 1,6	25	M16	36	175	± 1,1	6	95	± 2,2	370	
250	84	90	25	290	M42 × 2	80		0	200	± 1,6	31	M20	46	220	± 1,5	10	105	± 2,2	410	+4,0 -2,5
320	96	110	28	353	M48 × 2	90		0	220	± 2,2	31	M24	55	270	± 1,5	10	120	± 2,2	460	

^a According to ISO 4395.