
**Optics and optical instruments —
Microscopes — Screw threads for
objectives and related nosepieces**

Part 1:

Screw thread type RMS (4/5 in × 1/36 in)

iTeh STANDARD PREVIEW

*Optique et instruments d'optique — Microscopes — Filetages de fixation
des objectifs et des porte-objectifs correspondants —*

Partie 1: Filetage de type RMS (4/5 in × 1/36 in)

[ISO 8038-1:1997](#)

<https://standards.iteh.ai/catalog/standards/sist/cebf76ca-0b36-4f1b-9475-aa2a1e503f17/iso-8038-1-1997>



Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 8038-1 was prepared by Technical Committee ISO/TC 172, *Optics and optical instruments*, Subcommittee SC 5, *Microscopes and endoscopes*.

This first edition cancels and replaces, in part, ISO 8038:1985, which has been technically revised.

Annex A of this part of ISO 8038 is for information only.

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet central@iso.ch
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

Optics and optical instruments — Microscopes — Screw threads for objectives and related nosepieces

Part 1: Screw thread type RMS (4/5 in × 1/36 in)

1 Scope

This part of ISO 8038 specifies the dimensions of screw thread type RMS as one type of thread for connecting a microscope objective to the nosepiece.

NOTE 1 The values given in this part of ISO 8038 conform, except for the length of the thread lug¹⁾, to the internationally used screw thread laid down by the Microscopical Society of London in 1858, and published [1] as the Royal Microscopical Society Standard (RMS Standard) in 1936.

The use of this screw thread is recommended for microscopes unless other fittings are required for optical or design reasons.

ISO 8038-1:1997

NOTE 2 A specific combination of eyepiece, objective and tube lens (if provided, e.g. infinity optics) is frequently used to correct aberrations. Therefore the combination of an objective from one manufacturer, although conforming to this part of ISO 8038, and an eyepiece from another manufacturer may cause loss of image quality.

Objectives and eyepieces of one manufacturer can be combined with microscopes of another manufacturer if they conform to this part of ISO 8038 and also to ISO 9345-1 [2].

2 Dimensions and tolerances

The definitions, basic dimensions and tolerances of the screw thread type RMS shall be as given in tables 1 and 2 and illustrated in figure 1.

Table 1 — Basic dimensions of the screw thread

Dimension	Symbol	Value
Angle of thread	α	55°
Pitch	p	0,706 mm
Height of fundamental triangle	H	0,678 mm
Nominal diameter	D	20,320 mm

¹⁾ The maximum length of the thread lug according to this part of ISO 8038 is 5 mm. The RMS Standard specifies the length of the thread as 3,175 mm and length of the guide cylinder as 2,540 mm, giving a total of 5,715 mm.

Table 2 — Limit of size and tolerances

Dimensions in millimetres

Dimension for		Major diameter		Pitch		Minor diameter		Calculated play between internal and external threads		Allowances	Tolerance
Internal thread	max.	D	20,396	D_2	19,944	D_1	19,492			+0,076	0,076
	min.		20,320		19,868		19,416			0	
External thread	max.	d	20,274	d_2	19,822	d_1	19,370			-0,046	
	min.		20,198		19,746		19,294	-0,122			

Dimensions in millimetres

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8038-1:1997
<https://standards.iteh.ai/catalog/standards/sist/ceb76ca-0b36-4f1b-9475-aa2a1e503f77/iso-8038-1-1997>

- 1 Tube, objective
- 1 changer, etc.
- 2 Thread lug
- 3 Objective
- 4 Internal thread
- 5 External thread

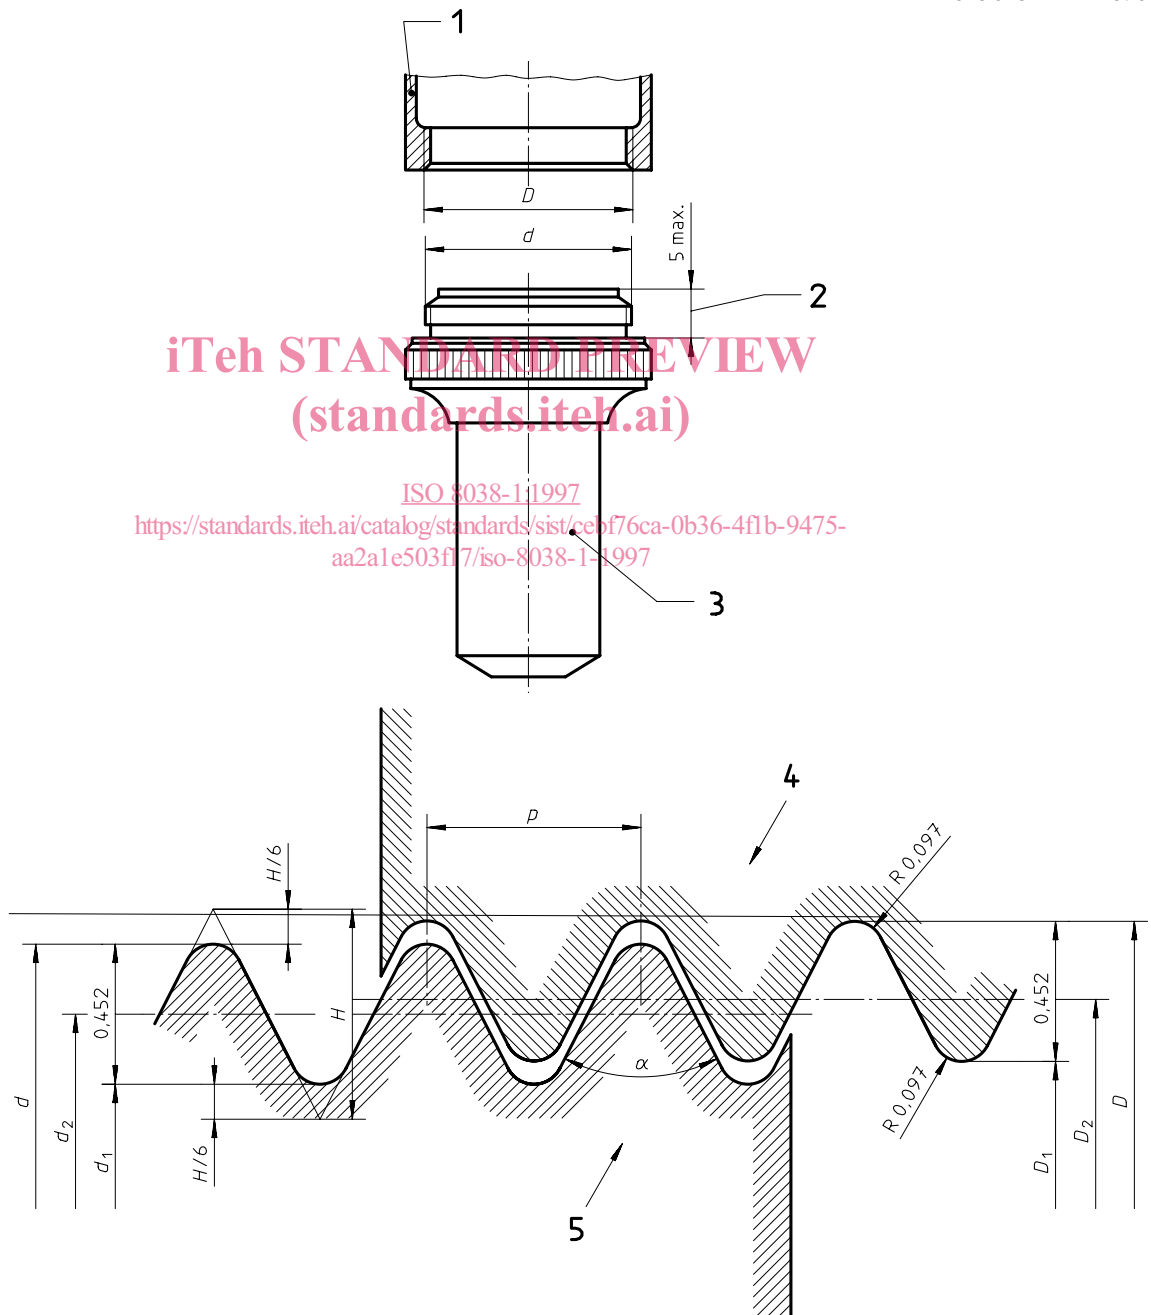


Figure 1 — Definitions and basic dimensions

Annex A (informative)

Bibliography

[1] *Journal of the Royal Microscopical Society*, Ser. 3, Vol. 56, pp. 377-379, December 1936.

[2] ISO 9345-1:1996, *Optics and optical instruments — Microscopes — Imaging distance related to mechanical reference planes — Part 1: Tube length 160 mm*.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 8038-1:1997](https://standards.iteh.ai/catalog/standards/sist/cebf76ca-0b36-4f1b-9475-aa2a1e503f17/iso-8038-1-1997)

<https://standards.iteh.ai/catalog/standards/sist/cebf76ca-0b36-4f1b-9475-aa2a1e503f17/iso-8038-1-1997>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8038-1:1997

<https://standards.iteh.ai/catalog/standards/sist/cebf76ca-0b36-4f1b-9475-aa2a1e503f17/iso-8038-1-1997>

ICS 37.020

Descriptors: optics, optical equipment, microscopes, optical microscopes, objectives, threaded fittings, screw threads, dimensions.

Price based on 3 pages
