
Tool holders with cylindrical shank —

Part 6:

Type E with cylindrical seat

Porte-outil à queue cylindrique —

Partie 6: Porte-outil de type E pour outils à queue cylindrique

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 10889-6:1997

<https://standards.iteh.ai/catalog/standards/sist/4c2e4154-a6cf-42c3-917c-5135e4d4fb6/iso-10889-6-1997>



Small tools.

ISO 10889 consists of the following parts, under the general title *Tool holders with cylindrical shank*:

- Part 1: Cylindrical shank, location bore — Technical delivery conditions
- Part 2: Type A, shanks for tool holders of special designs
- Part 3: Type B with rectangular radial seat
- Part 4: Type C with rectangular axial seat
- Part 5: Type D with more than one rectangular seat
- Part 6: Type E with cylindrical seat
- Part 7: Type F with taper seat
- Part 8: Type Z, accessories

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet central@iso.ch
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International

Tool holders with cylindrical shank —

Part 6:

Type E with cylindrical seat

1 Scope

ISO 10889 applies to tool holders with cylindrical shank for machine tools with non-rotating tools, preferably for turning machines.

This part of ISO 10889 specifies dimensions, designations and complementary technical delivery conditions for tool holders with cylindrical seat of types E1 to E4 with mounting system cylindrical shank in accordance with ISO 10889-1. For non-standardized tool holders such as tool holders with cylindrical seat as shown in the drawings, it is recommended to apply the corresponding specifications of this part of ISO 10889.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

2 Normative references

<https://standards.iteh.ai/catalog/standards/sist/4c2e4154-a6cf-42c3-917c-3132e4d41160/iso-10889-6-1997>

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 10889. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 10889 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 2768-1:1989, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications.*

ISO 2768-2:1989, *General tolerances — Part 2: Geometrical tolerances for features without individual tolerance indications.*

ISO 10889-1:1997, *Tool holders with cylindrical shank — Part 1: Cylindrical shank, location bore — Technical delivery conditions.*

ISO 10897:1996, *Collets for tool holders with taper ratio 1:10 — Collets, holders, nuts.*

ISO 15488:1996, *Collets with 8° setting angle for tool shanks — Collets, nuts and fitting dimensions.*

3 Dimensions

Unspecified details shall be chosen appropriately.


General tolerances: ISO 2768-1 mH

3.1 Tool holder of type E1

See figure 1 and table 1.

Dimensions in millimetres,
surface roughness in micrometres

$$\sqrt{\quad} = \sqrt{Rz \ 4}$$

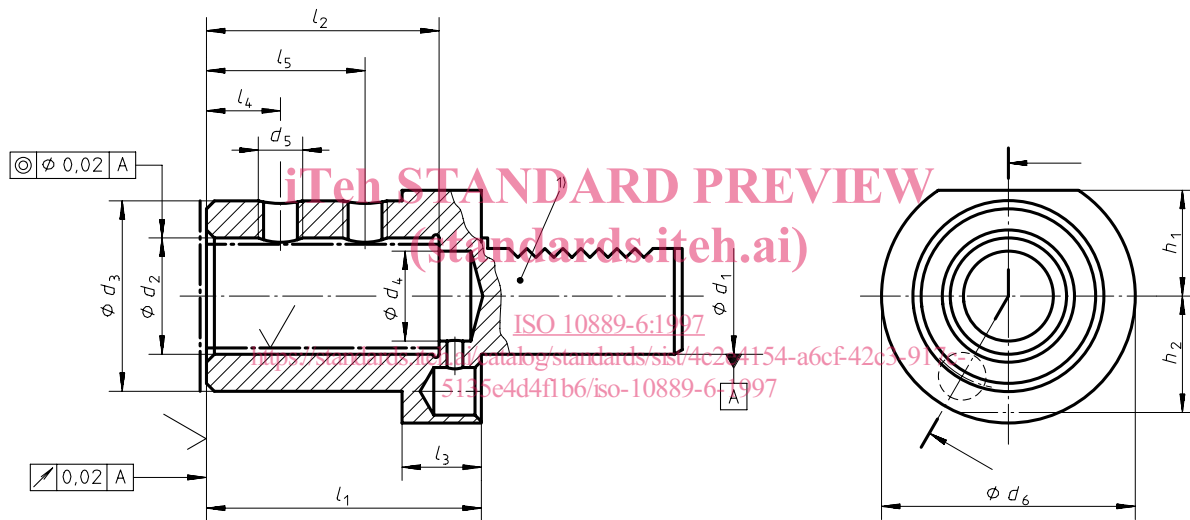

- 1) Cylindrical shank in accordance with ISO 10889-1.

Table 1

Dimensions in millimetres

d_1	d_2 H6	d_3	$d_4^{1)}$	d_5	d_6	h_1	h_2	l_1 $\begin{matrix} 0 \\ -0,2 \end{matrix}$	l_2	l_3	l_4	l_5
20	20	40	12	M10 × 1	50	—	23	67	54	18	15	35
	25	45	17	M12 × 1				71	59		17	40
25	20	40	12	M10 × 1	58	25	25	67	54	18	15	35
	25	45	17	M12 × 1				71	59		17	40
30	20	40	12	M10 × 1	68	28	30	67	54	22	15	35
	25	45	17	M12 × 1				71	59		17	40
	32	52	24					75	63		17	44
40	20	40	12	M10 × 1	83	32,5	—	67	54	22	15	35
	25	45	17	M12 × 1				75	59		17	40
	32	52	24					75	63		17	44
	40	65	32	M16 × 1				90	73		22	50
50	20	40	12	M10 × 1	98	35	—	67	54	30	15	35
	25	45	17	M12 × 1				80	59		17	40
	32	52	24					80	63		17	44
	40	65	32	M16 × 1				90	73		22	50
	50	75	42					100	83		24	60
60	20	40	12	M10 × 1	123	42,5	—	80	54	30	15	35
	25	45	17	M12 × 1				80	59		17	40
	32	52	24					80	63		17	44
	40	65	32	M16 × 1				90	73		22	50
	50	75	42					100	83		24	60
80	20	40	12	M10 × 1	158	55	—	80	54	30	15	35
	25	45	17	M12 × 1				80	59		17	40
	32	52	24					80	63		17	44
	40	65	32	M16 × 1				90	73		22	50
	50	75	42					100	83		24	60

1) d_4 shall be pilot-drilled for manufacturing reasons.

3.2 Tool holder of type E2

See figure 2 and table 2.

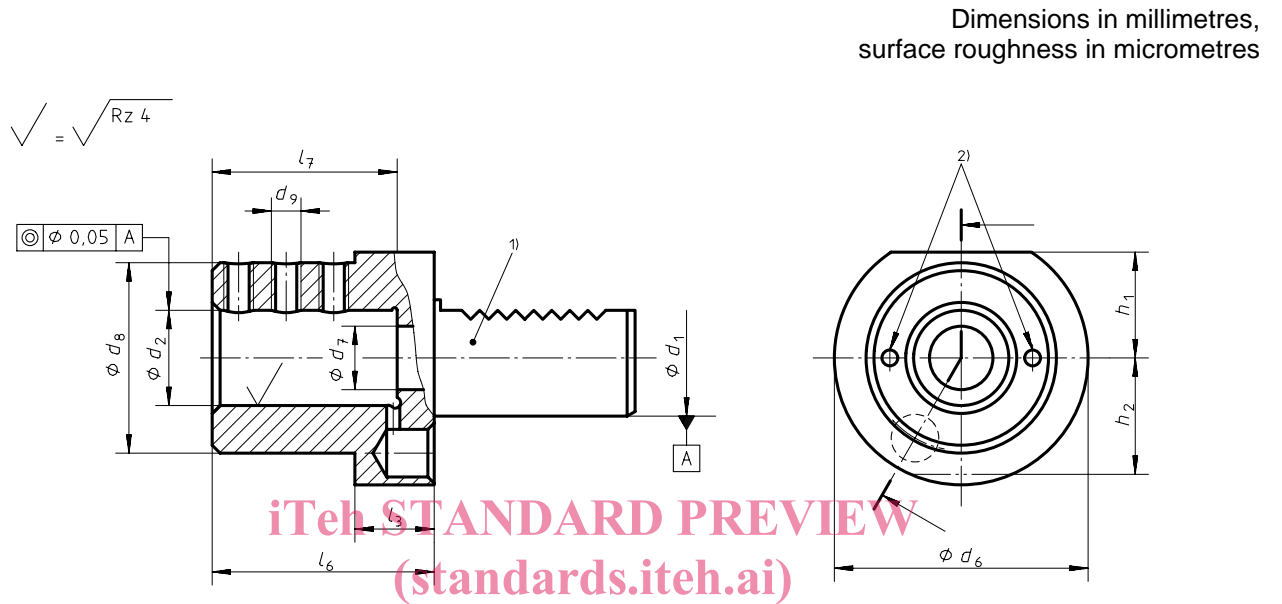


Figure 2 — Type E2 tool holder for turning tools with cylindrical shank

Table 2


Dimensions in millimetres

d_1	d_2 H7	d_6	d_7 min.	d_8	d_9 ¹⁾	h_1	h_2	l_3	l_6	l_7
16	6	40	6,7	32	M6	18	18	13	44	34
	8				M8					
	10			40						
	12									
	16									
20	8	50	9	40	M6	—	23	18	50	41
	10				M8					
	12			50						
	16									
	20									
	25				60					
25	8	58	10,5	40	M6	25	25	18	50	41
	10				M8					
	12			58						
	16									
	20									
	25				60					
30	8	68	16,5	55	M6	28	30	22	60	51
	10				M8					
	12			68						
	16									
	20									
	25									
	32				75					
40	12	83	20,5	55	M8	32,5	—	22	75	61
	16				M10					
	20			83						
	25									
	32									
	40				90					
50	16	98	25,5	68	M10	35	—	30	90	76
	20				M12					
	25			98						
	32									
	40				100					
60	16	123	40,5	68	M10	42,5	—	30	90	76
	20				M12					
	25			98						
	32									
	40									
	50				100					
80	20	158	40,5	68	M12	55	—	30	100	86
	25									
	32			98						
	40									
	50									

1) For $d_1 = 20$ mm at least two fastening threads, other sizes at least three fastening threads.

3.3 Tool holder of type E3

See figure 3 and table 3.

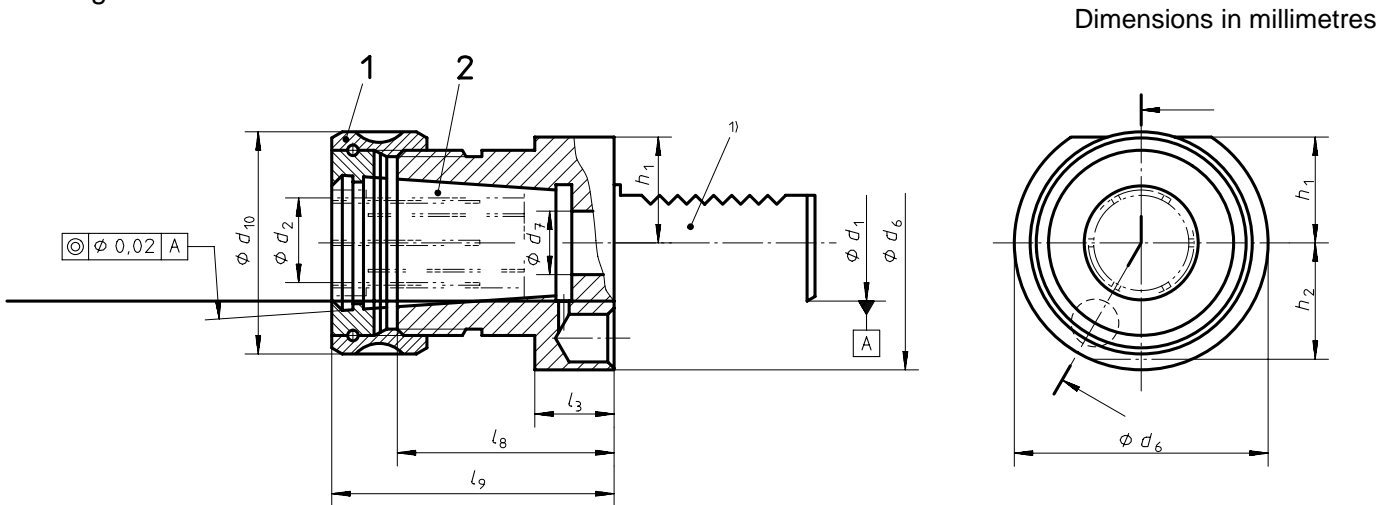

Key

- 1 Nut, form D, in accordance with ISO 10897.
- 2 Collet, form C, in accordance with ISO 10897.

1) Cylindrical shank in accordance with ISO 10889-1.


Figure 3 — Type E3 tool holder with cylindrical seat by collet in accordance with ISO 10897

iTech STANDARD PREVIEW
 (standards.itech.ai)
 ISO 10889-6:1997
 Table 3
<https://standards.itech.ai/catalog/standards/sist/4c2e4154-a6cf-42c3-917c-5135e4d4f1b6/iso-10889-6-1997>
 Dimensions in millimetres

d ₁	Nominal size for collet and nut	d ₂ Clamping range of collet in accordance with ISO 10897		d ₆	d ₇ min.	d ₁₀ max.	h ₁	h ₂	l ₃	l ₈	l ₉ max.
		Form A	Form B								
20	16	2 to 16	5 to 16	50	9	43	—	23	18	42	57
	20	2 to 20	6 to 20			50				46	62
25	16	2 to 16	5 to 16	58	10,5	43	25	25	18	42	57
	20	2 to 20	6 to 20			50				46	62
30	16	2 to 16	5 to 16	68	16,5	43	28	30	22	42	57
	25	2 to 25	6 to 25			60				59	75
40	25	2 to 25	6 to 25	83	20,5	60	32,5	—	22	59	75
	32	4 to 32	10 to 32			72				73	90
50	25	2 to 25	6 to 25	98	25,5	60	35	—	30	59	75
	32	4 to 32	10 to 32			72				73	90
60	25	2 to 25	6 to 25	123	40,5	60	42,5	—	30	59	75
	32	4 to 32	10 to 32			72				73	90
	40	6 to 29,5	30 to 40			85				82	100
80	40	6 to 29,5	30 to 40	158	40,5	82	55	—	40	82	100

3.4 Tool holder of type E4

See figure 4 and table 4.

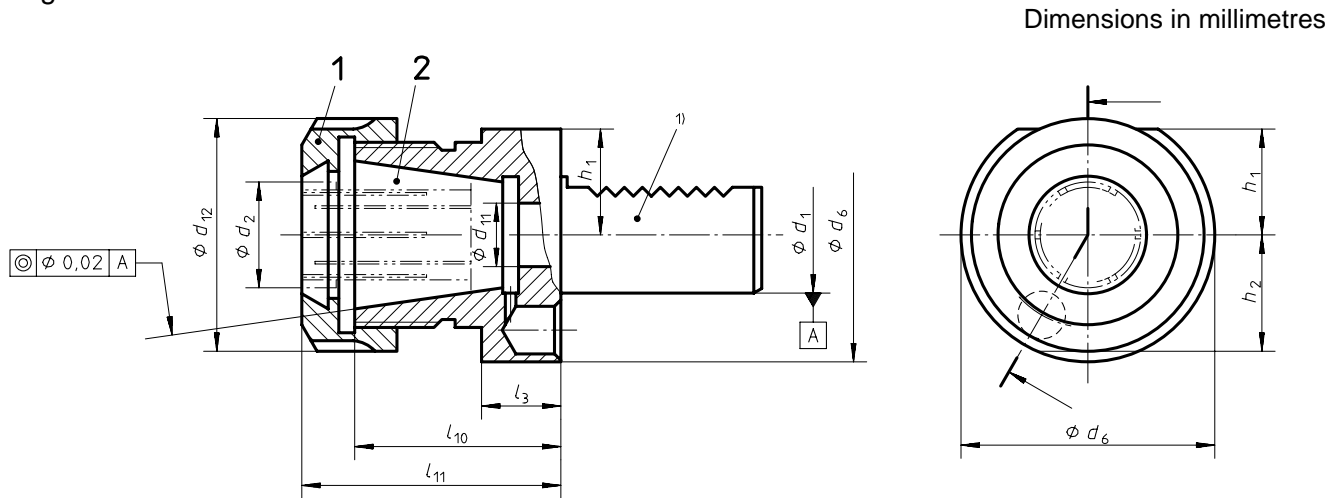

Key

- 1 Nut, form D, in accordance with ISO 15488.
 - 2 Collet, form C, in accordance with ISO 15488.
- 1) Cylindrical shank in accordance with ISO 10889-1.

Figure 4 — Type E4 tool holder with cylindrical seat by collet in accordance with ISO 15488 (standards.iteh.ai)

ISO 10889-6:1997 Table 4 Dimensions in millimetres
<https://standards.iteh.ai/catalog/standards/sist/4c2e4154-a6cf-42c3-917c-5135e4d4f1b6/iso-10889-6-1997>

d_1	Nominal size for collet and nut	d_2 Clamping range of collet in accordance with ISO 15488		d_6	d_{11} min.	d_{12} max.	h_1	h_2	l_3	l_{10}	l_{11} max.
		Form A	Form B								
16	20	1 to 13	1 to 13	40	6,7	35	18	18	13	32,5	44
20	25	1 to 16	2 to 16	50	9	42	—	23	18	38	50
	32	2 to 20	3 to 20			50				49,5	62
		1 to 16	2 to 16	58	10,5	42	25	25	18	45	57
		32	2 to 20			3 to 20				50	49,5
30	25	1 to 16	2 to 16	68	16,5	42	28	30	22	45	57
	40	3 to 26	4 to 26			63				56	70
40	32	2 to 20	3 to 20	83	20,5	50	32,5	—	22	49,5	62
	40	3 to 26	4 to 26			63				61	75
50	40	3 to 26	4 to 26	98	25,5	63	35	—	30	61	75
60	40	3 to 26	4 to 26	123	28,5	63	42,5	—	30	61	75
80	40	3 to 26	4 to 26	158	28,5	63	55	—	40	61	75