



# SLOVENSKI STANDARD

## SIST ES 283 026 V2.4.1:2009

01-marec-2009

---

**Zlite telekomunikacijske in internetne storitve ter protokoli za napredno omreženje (TISPAN) - Krmiljenje vira in pristopa - Protokol za izmenjavo informacij o rezervaciji QoS med funkcijo odločanja o storitveni politiki (SPDF) ter funkcijo krmiljenja dostopovnega vira in pristopa (A-RACF) pri specifikaciji vira in protokola**

Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN) - Resource and Admission Control - Protocol for QoS reservation information exchange between the Service Policy Decision Function (SPDF) and the Access-Resource and Admission Control Function (A-RACF) in the Resource and Protocol specification

[SIST ES 283 026 V2.4.1:2009](https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657f495e31/sist-es-283-026-v2-4-1-2009)

<https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657f495e31/sist-es-283-026-v2-4-1-2009>

**Ta slovenski standard je istoveten z: ES 283 026 Version 2.4.1**

---

**ICS:**

33.040.01	Telekomunikacijski sistemi na splošno	Telecommunication systems in general
33.080	Digitalno omrežje z integriranimi storitvami (ISDN)	Integrated Services Digital Network (ISDN)

**SIST ES 283 026 V2.4.1:2009**

**en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ES 283 026 V2.4.1:2009](https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657f495e31/sist-es-283-026-v2-4-1-2009)

<https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657f495e31/sist-es-283-026-v2-4-1-2009>

# ETSI ES 283 026 V2.4.1 (2008-11)

---

*ETSI Standard*

**Telecommunications and Internet converged Services and  
Protocols for Advanced Networking (TISPAN);  
Resource and Admission Control;  
Protocol for QoS reservation information exchange between  
the Service Policy Decision Function (SPDF) and the  
Access-Resource and Admission Control Function (A-RACF)  
in the Resource and Protocol specification**

---

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ES 283 026 V2.4.1:2009](https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657f495e31/sist-es-283-026-v2-4-1-2009)

<https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657f495e31/sist-es-283-026-v2-4-1-2009>



## Reference

---

RES/TISPAN-03130-NGN-R2

## Keywords

---

interface, stage 3

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ES 283 026 V2.4.1:2009

<https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657495c784-ES-283-026-V2-4-1-2009>

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

[http://portal.etsi.org/chaicor/ETSI\\_support.asp](http://portal.etsi.org/chaicor/ETSI_support.asp)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2008.  
All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™**, **TIPHON™**, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

**3GPP™** is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

# Contents

Intellectual Property Rights .....	5
Foreword.....	5
1 Scope .....	6
2 References .....	6
2.1 Normative references .....	6
2.2 Informative references.....	7
3 Definitions and abbreviations.....	7
3.1 Definitions.....	7
3.2 Abbreviations .....	8
4 Rq interface .....	8
4.1 Overview .....	8
4.2 Rq reference model .....	9
4.3 Functional elements and capabilities .....	9
4.3.1 Service Policy Decision Function (SPDF).....	9
4.3.2 Access-Resource Admission Control Function (A-RACF) .....	9
5 Resource control procedures .....	9
5.1 Procedures at the SPDF.....	11
5.1.1 Initial Reservation for a Session .....	11
5.1.2 Session Modification.....	12
5.1.3 Session Termination .....	13
5.1.4 Event notification.....	13
5.2 Procedures at the A-RACF.....	14
5.2.1 Initial Reservation for a Session .....	14
5.2.2 Session Modification.....	16
5.2.3 Session Termination .....	16
5.2.4 Event Notification.....	17
6 Rq protocol.....	17
6.1 Protocol support .....	17
6.1.1 Advertising Application Support .....	17
6.1.2 Transport protocol .....	17
6.1.3 Securing Rq messages .....	18
6.2 Rq messages .....	18
6.2.1 AA-Request (AAR) Command.....	18
6.2.2 AA-Answer (AAA) Command.....	18
6.2.3 Re-Auth-Request (RAR) Command .....	19
6.2.4 Re-Auth-Answer (RAA) Command .....	19
6.2.5 Session-Termination-Request (STR) Command.....	19
6.2.6 Session-Termination-Answer (STA) Command.....	20
6.2.7 Abort-Session-Request (ASR) Command .....	20
6.2.8 Abort-Session-Answer (ASA) Command.....	20
6.3 Experimental-Result-Code AVP values .....	21
6.3.1 Experimental-Result-Code AVP values imported from TS 129 209.....	21
6.3.2 Experimental-Result-Code AVP values defined in the present document.....	21
6.4 AVPs .....	22
6.4.1 AVPs defined in the present document.....	22
6.4.2 AVPs imported from TS 129 209 .....	22
6.4.3 AVPs imported from TS 183 017 .....	23
6.4.4 AVPs imported from ES 283 034 .....	23
6.4.5 Abort-Cause AVP .....	23
6.4.6 AF-Application-Identifier AVP .....	24
6.4.7 Flow-Description AVP .....	24
6.4.8 Flow-Grouping AVP.....	24
6.4.9 Flow-Number AVP.....	25

6.4.10	Flows AVP.....	25
6.4.11	Flow-Status AVP .....	25
6.4.12	Flow-Usage AVP.....	25
6.4.13	Specific-Action AVP.....	26
6.4.14	Max-Requested-Bandwidth-DL AVP.....	26
6.4.15	Max-Requested-Bandwidth-UL AVP.....	26
6.4.16	Media-Component-Description AVP .....	26
6.4.17	Media-Component-Number AVP.....	27
6.4.18	Media-Sub-Component AVP.....	27
6.4.19	Media-Type AVP.....	27
6.4.20	Reservation-Class AVP .....	28
6.4.21	Globally-Unique-Address AVP.....	28
6.4.22	Address-Realm AVP.....	28
6.4.23	Reservation-Priority AVP.....	28
6.4.24	Session-Bundle-Id AVP.....	28
6.4.25	AF-Charging-Identifier AVP.....	29
6.4.26	Service-Class AVP .....	29
6.4.27	Transport-Class AVP.....	29
6.4.28	Overbooking-indicator AVP.....	29
6.4.29	Authorization-Package-Id AVP.....	29
6.4.30	Media-Authorization-Context-Id AVP.....	29
<b>Annex A (informative):</b>	<b>Resource reservation flow states maintained by A-RACF.....</b>	<b>30</b>
<b>Annex B (informative):</b>	<b>Change history .....</b>	<b>32</b>
History .....		33

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)

[SIST ES 283 026 V2.4.1:2009](https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657f495e31/sist-es-283-026-v2-4-1-2009)

<https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657f495e31/sist-es-283-026-v2-4-1-2009>

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This ETSI Standard (ES) has been produced by ETSI Technical Committee Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN).

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ES 283 026 V2.4.1:2009](https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657f495e31/sist-es-283-026-v2-4-1-2009)

<https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657f495e31/sist-es-283-026-v2-4-1-2009>

# 1 Scope

The present document provides the stage 3 specification of the Rq interface. The functional requirements and the stage 2 specifications of the Rq interface are contained in ES 282 001 [1] and ES 282 003 [2]. The Rq interface is the interface between the Service Policy Decision Function (SPDF) and the Access - Resource and Admission Control Function (A-RACF) and is used for QoS resource reservation information exchange between the SPDF and the A-RACF. Via the Rq interface the SPDF issues requests for resources in the access network, indicating IP QoS characteristics. The A-RACF uses the IP QoS information to perform admission control and indicate to the SPDF via the Rq interface its admission control decisions. Due to the possible business roles in an access environment, the SPDF may be either in the same domain or in a different domain as the A-RACF.

The present document defines:

- The information to be exchanged between SPDF and A-RACF over the Rq interface.
- An Rq interface definition based on the Diameter protocol.

In situations where no generic overload control mechanism is used on the Rq interface, the interface shall only be capable of supporting a one-to-one relationship between the A-RACF and SPDF (i.e. one SPDF may only contact one A-RACF, and that A-RACF may only contact that same SPDF). Overload control need not be supported in this situation due to the fact that it should be possible to traffic engineer the capabilities of the two entities, so that the capacity of one entity matches the capacity of the other.

# 2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
  - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
  - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

For online referenced documents, information sufficient to identify and locate the source shall be provided. Preferably, the primary source of the referenced document should be cited, in order to ensure traceability. Furthermore, the reference should, as far as possible, remain valid for the expected life of the document. The reference shall include the method of access to the referenced document and the full network address, with the same punctuation and use of upper case and lower case letters.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

## 2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

- [1] ETSI ES 282 001: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); NGN Functional Architecture Release 2".



- [2] ETSI ES 282 003: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); Resource and Admission Control Sub-system (RACS); Functional Architecture; Release 2".
- [3] ETSI ES 282 004: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); NGN Functional Architecture; Network Attachment Sub-System (NASS); Release 2".
- [4] ETSI ES 283 034: "Telecommunications and Internet converged Services and Protocols for Advanced Networks (TISPAN); Network Attachment Sub-System (NASS); e4 interface based on the DIAMETER protocol; Release 2".
- [5] ETSI TS 183 017: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); Resource and Admission Control: DIAMETER protocol for session based policy set-up information exchange between the Application Function (AF) and the Service Policy Decision Function (SPDF); Protocol specification; Release 2".
- [6] ETSI TS 129 207: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Policy control over Gs interface (3GPP TS 29.207)".
- [7] ETSI TS 129 209: "Universal Mobile Telecommunications System (UMTS); Policy control over Gq interface (3GPP TS 29.209)".
- [8] ETSI TS 133 210: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); 3G security; Network Domain Security (NDS); IP network layer security (3GPP TS 33.210)".
- [9] IETF RFC 2960: "Stream Control Transmission Protocol".
- [10] IETF RCF 3309: "SCTP Checksum Change".
- [11] IETF RFC 3588: "Diameter Base Protocol".
- [12] IETF RFC 4005: "Diameter Network Access Server Application".

<https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657495e31/sist-es-283-026-v2-4-1-2009>

## 2.2 Informative references

The following referenced documents are not essential to the use of the present document but they assist the user with regard to a particular subject area. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Not applicable.

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

**Attribute-Value Pair (AVP):** See RFC 3588 [11], corresponds to an Information Element in a Diameter message.

**hard-state reservation:** type of reservation whereby the requested resources are reserved without time limit

NOTE: Hard-state reservations are terminated if the DIAMETER session is terminated.

**soft-state reservation:** type of reservation whereby the requested resources are reserved for a finite amount of time, soft-state reservations are terminated when the DIAMETER session is terminated

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AAA	AA-Answer
AAR	AA-Request
AF	Application Function
A-RACF	Access-Resource and Admission Control Function
ASA	Abort-Session-Answer
ASP	Application Service Provider
ASR	Abort-Session-Request
ATM VC	Asynchronous Transfer Mode Virtual Circuit
AVP	Attribute-Value Pair
BGF	Border Gateway Function
IANA	Internet Assigned Numbers Authority
IP	Internet Protocol
IP-CAN	IP-Connectivity Access Network
NASREQ	Network Access Server REquirements
RAA	Re-Auth-Answer
RACF	Resource and Admission Control Function
RACS	Resource and Admission Control Subsystem
RAR	Re-Auth-Request
RCEF	Residual Code Excited Field
RTCP	Real-time Transport Control Protocol
RTP	Real-time Transport Protocol
SDI	Session Description Information
SPDF	Service-based Policy Decision Function
STA	Session-Termination-Answer
STR	Session-Termination-Request
UDP	User Datagram Protocol
xDSL	x Digital Subscriber Line

SIST ES 283 026 V2.4.1:2009

<https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202-c7657495e31/sist-es-283-026-v2-4-1-2009>

## 4 Rq interface

### 4.1 Overview

In the following, the Rq interface is described in detail concerning what type of information that needs to be transported between the SPDF and the A-RACF. The functional requirements and the stage 2 specifications of the Rq interface are contained in ES 282 001 [1] and ES 282 003 [2]. Due to the possible business roles in an access environment, an SPDF instance may be either in the same domain or in a different domain as the A-RACF instance with which it interacts. This means that Rq reference point should support both the case when an SPDF instance and the A-RACF instance with which it interacts are located in the same domain, and when they are located in different domains.

The Rq reference point is an open vendor interface and an open operator interface. One A-RACF instance shall be able to serve more than one SPDF instance and one given SPDF instance may interact with a number of A-RACF instances, although on a session basis, it shall interact with only a single A-RACF instance.

## 4.2 Rq reference model

The Rq interface is defined between the SPDF and the A-RACF.

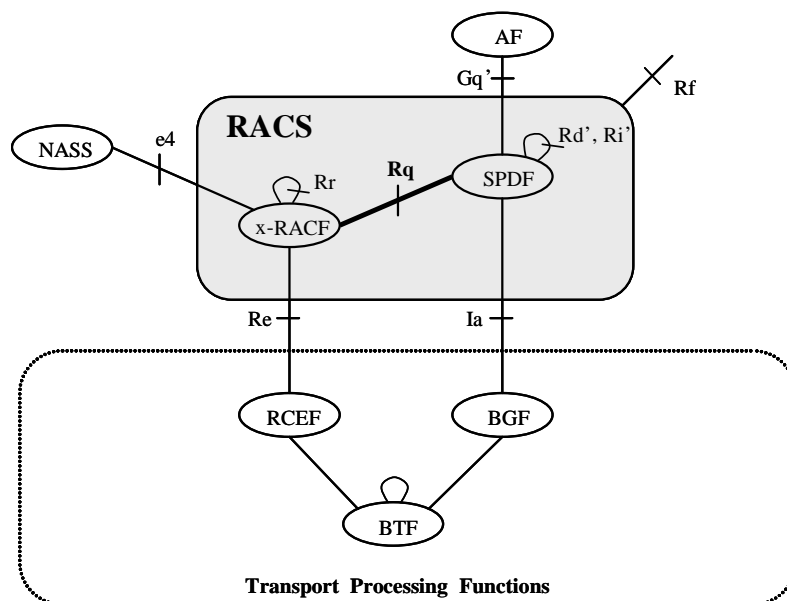


Figure 1: Rq interface architecture model

iTeh STANDARD PREVIEW

(standards.it/iti/si)

## 4.3 Functional elements and capabilities

### 4.3.1 Service Policy Decision Function (SPDF)

The SPDF is a functional element that coordinates the resource reservations requests received from by the AF. The SPDF makes policy decisions using policy rules and forwards the session and media related information obtained from the AF to the A-RACF via the Rq reference point for admission control purposes. The functionality of the SPDF is further detailed in ES 282 003 [2].

### 4.3.2 Access-Resource Admission Control Function (A-RACF)

The A-RACF is a functional element performing resource reservation admission control and network policy assembly. The A-RACF receives resource reservation requests from the SPDF via the Rq reference point. The functionality of the SPDF is further detailed in ES 282 003 [2].

## 5 Resource control procedures

The resource control procedures are defined in seven interaction procedures:

- 1) Reservation.
- 2) Commit.
- 3) Reservation and commit.
- 4) Refresh.
- 5) Modification.
- 6) Release.

## 7) Event notification.

These interactions are described in the following clauses. During the interactions Diameter AVPs are passed between the SPDF and the A-RACF.

Figure 2 describes the flow states as maintained by the A-RACF according to the procedures. Annex A provides a table further clarifying how states change at different events and actions taken by the A-RACF.

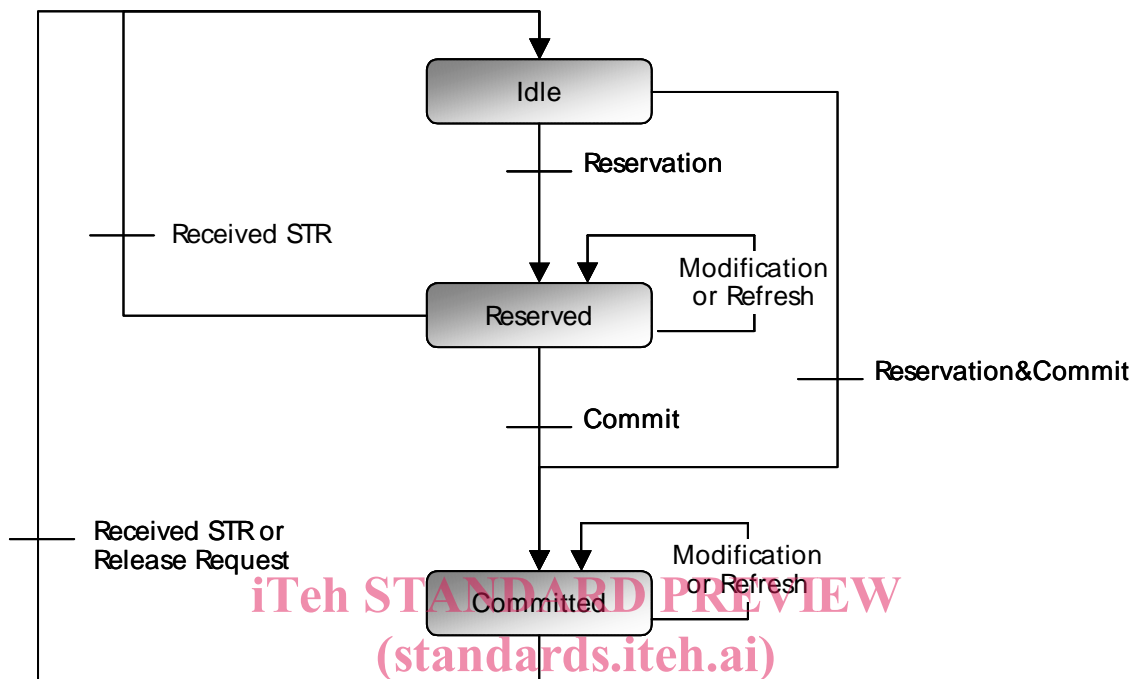


Figure 2: Flow state

<https://standards.iteh.ai/catalog/standards/sist/190b9b60-d33e-4de6-a202->

The Flow-Status AVP (clause 6.4.11) is used to define the action to be taken for each AA-Request made by the SPDF to the A-RACF. The rules for interpreting the Flow-Status AVP are the following:

- Reservation: New Media-Description-Component AVP(s) and Media-Sub-Component AVP(s). Optional Flow-Status AVP(s) set to DISABLED (3).
- Modification: Updated Media-Description-Component AVP(s) and/or Media-Sub-Component AVP(s). Flow-Status AVP not modified, unless the state needs to be modified (e.g. for committing a resource reservation, or for releasing a resource reservation).
- Commit: Media-Description-Component AVP(s) and optionally Media-Sub-Component AVP(s) of existing reservations with Flow-Status AVP(s) set to ENABLED-UPLINK (0), ENABLED-DOWNLINK (1) or ENABLED (2).
- ReservationAndCommit: New Media-Component-Description AVP(s) and Media-Sub-Component AVP(s). Flow-Status AVP(s) set to ENABLED-UPLINK (0), ENABLED-DOWNLINK (1) or ENABLED (2).
- Release: Media-Description-Component AVP(s) and optionally Media-Sub-Component AVP(s) of existing reservations with Flow-Status AVP(s) set to REMOVED (4).
- Refresh: Existing reservation unchanged (Media-Component-Description AVP(s) not specified or unchanged), Flow-Status AVP unchanged.