

## SLOVENSKI STANDARD SIST EN 302 608 V1.1.1:2009

01-marec-2009

9`Y\_lfca U[bYlbUnXfi ÿ`/]jcgh]b`nUXYjY'j`njYn]`n`fUX]/g\_]a 'gdY\_lfca 'f9FAŁ'!
BUdfUjY`\_fUh\_Y[UXcgY[UfGF8Ł'!`FUX]/g\_UcdfYa UnUÿY`Ynb]ý\_Y`g]ghYa Y
9ifcVU]gY`!'<Ufacb]n]fUb]'9Bz̃\_]`nUYa UV]ghjYbY`nU\hYjY`YbU' "&X]fY\_h]jY
F/HH9

Electromagnetic compatibility and Radio spectrum Matters (ERM) - Short Range Devices (SRD) - Radio equipment for Eurobalise railway systems - Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive ITeh STANDARD PREVIEW

(standards.iteh.ai)

SIST EN 302 608 V1.1.1:2009 https://standards.iteh.ai/catalog/standards/sist/14626626-2511-4a6e-9bea-4b5c76079f46/sist-en-302-608-v1-1-1-2009

Ta slovenski standard je istoveten z: EN 302 608 Version 1.1.1

#### ICS:

33.060.20	Sprejemna in oddajna oprema	Receiving and transmitting equipment
33.100.01	Elektromagnetna združljivost na splošno	Electromagnetic compatibility in general
45.020	Železniška tehnika na splošno	Railway engineering in general

SIST EN 302 608 V1.1.1:2009 en

SIST EN 302 608 V1.1.1:2009

# iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST EN 302 608 V1.1.1:2009</u> https://standards.iteh.ai/catalog/standards/sist/14626626-2511-4a6e-9bea-4b5c76079f46/sist-en-302-608-v1-1-1-2009

## ETSI EN 302 608 V1.1.1 (2008-11)

Harmonized European Standard (Telecommunications series)

Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Short Range Devices (SRD);
Radio equipment for Eurobalise railway systems;
Harmonized EN covering the essential requirements
of article 3.2 of the R&TTE Directive

# iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 302 608 V1.1.1:2009 https://standards.iteh.ai/catalog/standards/sist/14626626-2511-4a6e-9bea-4b5c76079f46/sist-en-302-608-v1-1-1-2009



2

Reference
DEN/ERM-TG28-0418

Keywords
radio, SRD, testing

#### **ETSI**

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la

Teh Sous-Préfecture de Grasse (06) N° 7803/88/ IEW

(standards.iteh.ai)

SIST EN 302 608 V1.1.1:2009 https://standards.iteh.ai/catalog/standards/sist/14626626-2511-4a6e-9bea-4b5c76079mps/tants/02icev1-1-1-2009

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<a href="http://portal.etsi.org/tb/status/status.asp">http://portal.etsi.org/tb/status/status.asp</a>

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI\_support.asp

#### **Copyright Notification**

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2008.
All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup>, **UMTS**<sup>TM</sup>, **TIPHON**<sup>TM</sup>, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP**<sup>TM</sup> is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

## Contents

Intelle	ectual Property Rights	5
Forev	word	5
Introd	duction	5
1	Scope	6
2	References	6
2.1	Normative references	
2.1	Informative references.	
۷,۷		
3	Definitions, symbols and abbreviations	8
3.1	Definitions	
3.2	Symbols	8
3.3	Abbreviations	8
4	Technical Requirements Specification	Q
4.1	Technical Requirements	9
4.1.1	OBE Transmitter Mask	
4.1.1.1		
4.1.1.2		
4.1.1.3		
4.1.1.4		
4.1.2	Maximum Allowable Measurement Uncertainty  OBE Unwanted Enissions	9
4.1.2.1	1 Definition	9
4.1.2.2	1 Definition	10
4.1.2.3	3 Limit	10
4.1.2.4	4 Maximum Allowable Measurement Uncertainty	10
4.1.3	Eurobalise Transmitter Mask. SISTEN 302 608 V1.1.1:2009	10
4.1.3.	Maximum Allowable Measurement Uncertainty Eurobalise Transmitter Mask Definition  Test Procedure  Maximum Allowable Measurement Uncertainty  Line 1	10
4.1.3.2	2 Test Procedure 4b5c76079f46/sist-en-302-608-v1-1-1-2009	10
4.1.3.3		
4.1.3.4	4 Maximum Allowable Measurement Uncertainty	11
4.1.4	Eurobalise Unwanted Emissions	
4.1.4.	1 Definition	11
4.1.4.2	2 Test Procedure	11
4.1.4.3	3 Limit	12
4.1.4.4	4 Maximum allowable measurement uncertainty	12
_	That County's and	10
5	Test Conditions	
5.1	General Took Power Source	
5.2 5.3	Test Power Source Normal Test Conditions	
5.3.1	Normal Test Conditions  Normal Temperature and Humidity	
5.3.2	Normal Temperature and Humidity	
5.3.2.1		
5.3.2.2		
5.3.2.2 5.4	Requirements for the Test Modulation	
5.5	Choice of Equipment for Test Suites.	
5.6	Measuring Receiver	
6	Measurement Uncertainty	
	•	
7	Test Procedures for Essential Radio Test Suites	
7.1	OBE Transmitter Mask	
7.2 7.3	OBE Unwanted Emissions	
7.3 7.4	Eurobalise Transmitter Mask Eurobalise Unwanted Emissions	
/ <b>.</b> +	Eufouanse onwanted Einissions	1 0

Annex A (normative)	RTT)	17
Annex B (normative)	: Radiated Measurement	19
3.1.1 General 3.1.2 Anechoic Cha	eneral Arrangements for Measurements Involving the use of Radiated Fields	19 19
3.1.4 Open Area Te 3.1.5 Test Antenna	umber with a Conductive Ground Plane	21 22
3.2.1 General	e Use of Radiation Test Sites	22
Range Length B.2.4.1 Far-field L	the EUTength Above 30 MHzand Far-field Length Below 30 MHz	23
3.2.5 Site Preparation 3.3 Coupling of Sig 3.3.1 General	nals	24 24
3.4 Standard Test P	osition	25
Annex C (informative) Annex D (normative)	iTeh STANDARD PREVIEW H-field Measurements and Limits at 3 m and 30 m	28
	(standards.iteh.ai)	
	surements at 30 m <u>Distance 302 608 V1.1.1.2009</u> surements at 30 m <u>Distance 302 608 V1.1.1.2009</u> surements at 30 m <u>Distance 302 608 V1.1.1.2009</u> 4b5c76079f46/sist-en-302-608-v1-1-1-2009	
Annex E (informative		30
Annex F (informative		
History		32

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

#### **Foreword**

This Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document has been produced by ETSI in response to mandate M/364 from the European Commission issued under Council Directive 98/34/EC [i.1] (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [i.2] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

Technical specifications relevant to Directive 1999/5/EC [i.2] are given in annex A.

These specifications are complementary with the system and interoperability requirements for these devices established under Commission Decision 2004/447/EC di.3]catalog/standards/sist/14626626-2511-4a6e-9bea-

In addition, relevant parts of EN 50121 [i.4] are applicable for the electromagnetic compatibility of railway applications (part 3-2 for the OBE and part 4 for the Eurobalise equipment).

National transposition dates		
Date of adoption of this EN:	4 November 2008	
Date of latest announcement of this EN (doa):	28 February 2009	
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 August 2009	
Date of withdrawal of any conflicting National Standard (dow):	31 August 2010	

## Introduction

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the R&TTE Directive. The modular structure is shown in EG 201 399 [i.5].

The Eurobalise transmission system is defined by the specifications of the UNISIG consortium [i.6] and [i.7].

## 1 Scope

The present document covers the technical requirements for radio transmitters and receivers used in the Eurobalise transmission system. The system is only used in railway systems.

It applies to the following equipment units:

- a) the On-Board Equipment (OBE) Tele-powering the Eurobalise; and
- b) the Eurobalise that is always installed in between the rails.

The OBE comprises a transmitter (normally un-modulated) and a receiver fitted with an integral or dedicated antenna.

The Eurobalise FSK-modulated transmitter is Tele-powered by the OBE and has an integral antenna.

The Eurobalise transmission system operates in accordance with ERC Recommendation 70-03 [i.8], annex 4.

These radio equipment types are capable of operating at the following frequencies as given in table 1.

Table 1: Radio communications frequencies

	Radio communications frequencies
OBE transmit centre frequency	27,095 MHz
Eurobalise transmit centre frequency	4,234 MHz

The present document is intended to cover the provisions of Directive 1999/5/EC [i 2] (R&TTE Directive) article 3.2, which states that "... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

NOTE: A list of such ENs is included on the web site <a href="http://www.newapproach.org">http://www.newapproach.org</a>.

SIST EN 302 608 V1.1.1:2009

https://standards.iteh.ai/catalog/standards/sist/14626626-2511-4a6e-9bea-

## 2 References

4b5c76079f46/sist-en-302-608-v1-1-1-2009

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
  - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
  - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <a href="http://docbox.etsi.org/Reference">http://docbox.etsi.org/Reference</a>.

For online referenced documents, information sufficient to identify and locate the source shall be provided. Preferably, the primary source of the referenced document should be cited, in order to ensure traceability. Furthermore, the reference should, as far as possible, remain valid for the expected life of the document. The reference shall include the method of access to the referenced document and the full network address, with the same punctuation and use of upper case and lower case letters.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

#### 2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

- [1] ETSI TR 102 273 (V1.2.1) (all parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties".
- [2] CISPR 16 (2006), (parts 1-1, 1-4 and 1-5): "Specification for radio disturbance and immunity measuring apparatus and methods; Part 1: Radio disturbance and immunity measuring apparatus".
- [3] ETSI TR 100 028 (V1.4.1) (all parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".
- [4] ANSI C63.5 (2006): "American National Standard for Electromagnetic Compatibility Radiated Emission Measurements in Electromagnetic Interference (EMI) Control Calibration of Antennas (9 kHz to 40 GHz)".

#### 2.2 Informative references

The following referenced documents are not essential to the use of the present document but they assist the user with regard to a particular subject area. For non-specific references, the latest version of the referenced document (including any amendments) applies.

- [i.1] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- [i.2] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive). 302 608 V1.1.1.2009

https://standards.iteh.ai/catalog/standards/sist/14626626-2511-4a6e-9bea-

- [i.3] Commission Decision 2004/447/EC of 29 April 2004 modifying Annex A to Decision 2002/731/EC of 30 May 2002 and establishing the main characteristics of Class A system (ERTMS) of the control-command and signalling subsystem of the trans-European conventional rail system referred to in Directive 2001/16/EC of the European Parliament and of the Council.
- [i.4] CENELEC EN 50121 (all parts): "Railway Applications Electromagnetic Compatibility".
- [i.5] ETSI EG 201 399 (V2.1.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); A guide to the production of candidate Harmonized Standards for application under the R&TTE Directive".
- [i.6] UNISIG SUBSET-085: "Test Specification for Eurobalise FFFIS".
- [i.7] UNISIG SUBSET-036: "FFFIS for Eurobalise".
- NOTE: The UNISIG Consortium was composed of the following European Companies working in the Railway Signalling area: Alstom, Ansaldo Signal, Bombardier, Invesys Rail, Siemens, and Thales.
- [i.8] CEPT/ERC/Recommendation 70-03: "Relating to the use of Short Range Devices (SRD)".

## 3 Definitions, symbols and abbreviations

#### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

**dedicated antenna:** removable antenna supplied and tested with the radio equipment, designed as an indispensable part of the equipment

down-link: optional binary ASK- modulated transmission link from the OBE to trackside units

**duty cycle:** defined as the ratio, expressed as a percentage, of the maximum transmitter "on" time monitored over one hour, relative to a one hour period

eurobalise: wayside transmission unit that uses the magnetic transponder technology

NOTE: Its main function is to transmit and/or receive signals through the air gap. The Eurobalise is a single device mounted on the track, which communicates with a train passing over it.

integral antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment

magnetic transponder technology: method that uses magnetic coupling in the air gap between a transmitter and a receiver for conveying data and energy

NOTE: In the Eurobalise transmission system context, it considers systems using the 27,095 MHz for Telepowering and 4,234 MHz for Up-link transmission.

On-Board Equipment (OBE): consists of antenna unit(s) (for magnetic transponder technology) and the Balise transmission function (standards iteh ai)

NOTE: It functionally matches the air-gap interface and is installed on a train.

SIST EN 302 608 V1.1.1:2009

RF carrier: fixed radio frequency prior to modulation standards/sist/14626626-2511-4a6e-9bea-

**Tele-powering:** signal transmitted by the OBE, which activates the Eurobalise upon passage

NOTE: The signal is normally an un-modulated RF carrier (CW). However, it may optionally be binary ASK-modulated for the transmission of down-link data.

up-link: transmission link from the Eurobalise to the OBE

## 3.2 Symbols

For the purposes of the present document, the following symbols apply:

 $\begin{array}{ll} f & Frequency \\ S & Power Density \\ \lambda & Wavelength \end{array}$ 

#### 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AC	Alternating Current
ASK	Amplitude Shift Keying
CW	Continuous Wave
EUT	Equipment Under Test
FSK	Frequency Shift Keying
HS	Harmonized Standard
OATS	Open Area Test Site
OBE	On-Board Equipment

9

R&TTE Radio and Telecommunications Terminal Equipment

RF Radio Frequency SRD Short Range Device

VSWR Voltage Standing Wave Ratio

## 4 Technical Requirements Specification

### 4.1 Technical Requirements

#### 4.1.1 OBE Transmitter Mask

#### 4.1.1.1 Definition

This test only applies to the OBE.

The radiated H-field mask is defined in the direction of maximum field strength under specified conditions of measurement.

#### 4.1.1.2 Test Procedure

This test is performed using a radiated measurement (see clause 7.1).

### 4.1.1.3 Limit iTeh STANDARD PREVIEW

The limits of figure 1 (expressed in dBµA/m at a distance of 10 m) shall not be exceeded.

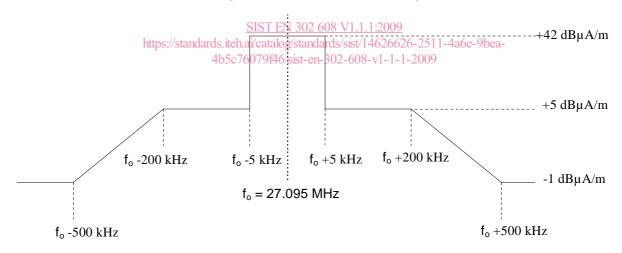


Figure 1: OBE transmitter mask

#### 4.1.1.4 Maximum Allowable Measurement Uncertainty

See table 5 in clause 6.

#### 4.1.2 OBE Unwanted Emissions

#### 4.1.2.1 Definition

This test only applies to the OBE. Unwanted emissions consist of out-of-band and spurious emissions outside the frequency range  $27,095 \text{ MHz} \pm 500 \text{ kHz}$  as defined in clause 4.1.1.3.

10

#### 4.1.2.2 Test Procedure

This test is performed using a radiated measurement (see clause 7.2).

#### 4.1.2.3 Limit

The limits in table 2 (expressed in  $dB\mu A/m$  at a distance of 10 m for frequencies below 30 MHz and expressed in  $dB\mu V/m$  at a distance of 10 m for frequencies equal or greater than 30 MHz) shall not be exceeded.

Table 2: OBE unwanted emissions limits

Frequency: (f)	Limit
9 kHz ≤ f < 150 kHz	44 dBμA/m at 9 kHz decreasing with logarithm of frequency to 19 dBμA/m at 150 kHz
150 kHz ≤ f < 30 MHz	54 dBμA/m at 150 kHz decreasing with logarithm of frequency to 4 dBμA/m at 30 MHz
30 MHz ≤ f ≤ 1 GHz	79 dBμV/m at 30 MHz decreasing with logarithm of frequency to 54 dBμV/m at 1 GHz

#### 4.1.2.4 Maximum Allowable Measurement Uncertainty

See table 5 in clause 6.

#### 4.1.3 Eurobalise Transmitter Mask

## 4.1.3.1 Definition Teh STANDARD PREVIEW

This test only applies to Eurobalises.

(standards.iteh.ai)

The radiated H-field uplink mask is defined in the direction of maximum field strength under specified conditions of measurement. https://standards.iteh.ai/catalog/standards/sist/14626626-2511-4a6e-9bea-

4b5c76079f46/sist-en-302-608-v1-1-1-2009

#### 4.1.3.2 Test Procedure

This test is performed using a radiated measurement (see clause 7.3).