
Aerospace — Nuts, anchor, self-locking, fixed, single lug, with counterbore, with MJ threads, classifications: 1 100 MPa (at ambient temperature)/235 °C, 1 100 MPa (at ambient temperature)/315 °C and 1 100 MPa (at ambient temperature)/425 °C —

Dimensions

(standards.iteh.ai)

Aéronautique et espace — Écrous à river, à freinage interne, fixes, simple patte, avec chambrage, à filetage MJ, classifications: 1 100 MPa (à température ambiante)/235 °C, 1 100 MPa (à température ambiante)/315 °C et 1 100 MPa (à température ambiante)/425 °C — Dimensions



Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 3168 was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 4, *Aerospace fastener systems*.

This second edition cancels and replaces the first edition (ISO 3168:1986), which has been technically revised.

iTeh STANDARD PREVIEW

Standards.iTeh.io

ISO 3168:1998

9cf432a-88a5-d273dd95990/iso-3168-1998

© ISO 1998

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet iso@iso.ch

Printed in Switzerland

Introduction

The dimensions specified in this International Standard have been determined to satisfy the requirements of the procurement specification of ISO 5858.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 3168:1998](https://standards.iteh.ai/catalog/standards/sist/19941910-9fcf-432a-88a5-d273dd95990/iso-3168-1998)

<https://standards.iteh.ai/catalog/standards/sist/19941910-9fcf-432a-88a5-d273dd95990/iso-3168-1998>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3168:1998

<https://standards.iteh.ai/catalog/standards/sist/19941910-9fcf-432a-88a5-d273dd95990/iso-3168-1998>

Aerospace — Nuts, anchor, self-locking, fixed, single lug, with counterbore, with MJ threads, classifications: 1 100 MPa (at ambient temperature)/235 °C and 1 100 MPa (at ambient temperature)/315 °C and 1 100 MPa (at ambient temperature)/425 °C — Dimensions

1 Scope

This International Standard specifies the dimensions of self-locking, fixed, single lug anchor nuts, with counterbore, with MJ threads, for classifications 1 100 MPa¹⁾/235 °C²⁾, 1 100 MPa¹⁾/315 °C²⁾ and 1 100 MPa¹⁾/425 °C²⁾.

This International Standard is only applicable for the compilation of aerospace product standards.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 5855-2:1988, *Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts.*

ISO 5858:1991, *Aerospace — Self-locking nuts with maximum operating temperature less than or equal to 425 °C — Procurement specification*

ISO 8788:1987, *Aerospace — Fasteners — Tolerances of form and position for nuts.*

3 Configuration and dimensions

See figure 1 and table 1. Dimensions and tolerances are expressed in millimetres. They apply after any surface coating(s) but before the application of any lubricant.

The metallic cap (optional) shall remain joined (type of attachment at the user's discretion) to the nut at the maximum operating temperature. See test conditions specified in ISO 5858.


1) Corresponds to the minimum tensile stress which the nut is able to withstand at ambient temperature without breaking or cracking when tested with a bolt of a higher strength class.

2) Maximum temperature that the nut is able to withstand, without permanent alteration to its original characteristics, after ambient temperature has been restored. The maximum temperature is conditioned by the surface treatment.

6,3 / (3,2)¹⁾

Remove sharp edges 0,1 to 0,4

Alternatives: countersunk rivet holes (when specified by purchaser) may be dimpled or cut countersunk (at manufacturer's option)

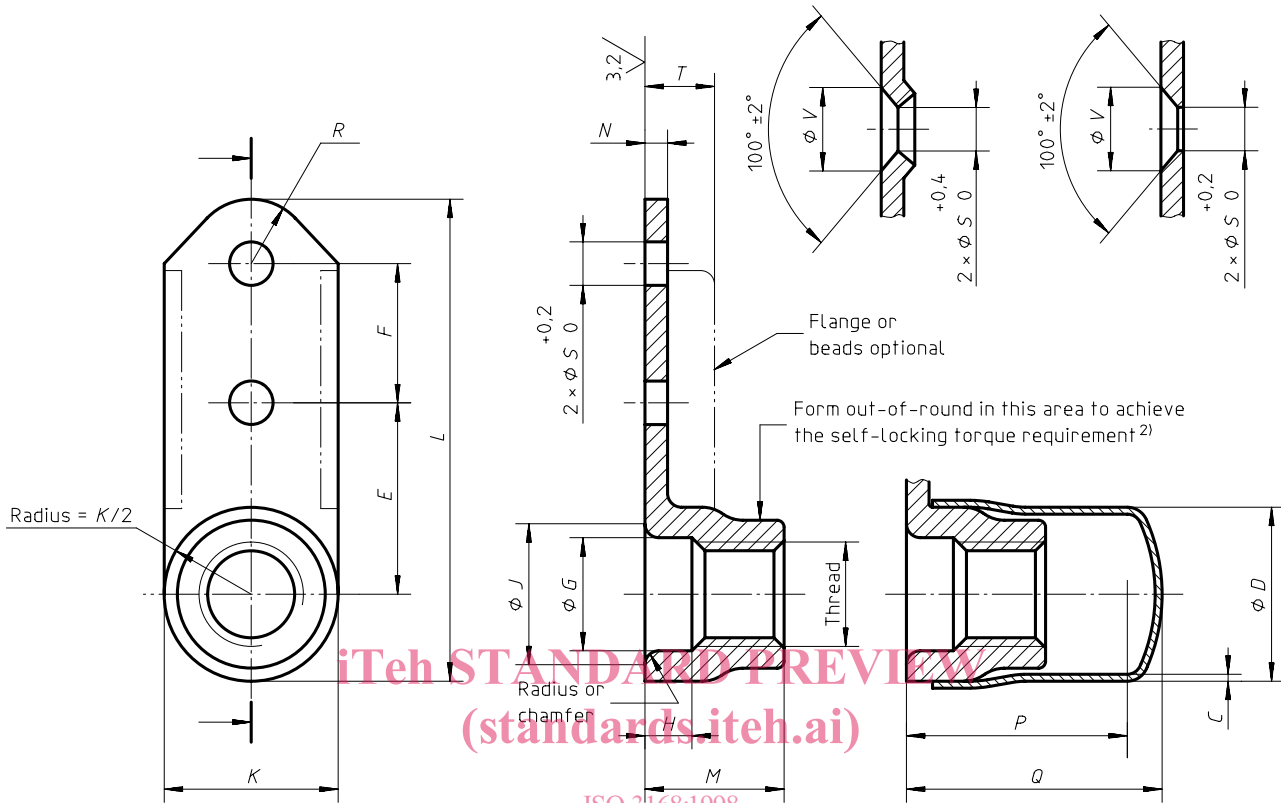

ISO 3168:1998

<https://standards.itech.ai/catalog/standards/sist/19941910-9fcf-432a-88a5-4273-41959905iso-3168-1998> Configuration with cap

NOTE — Tolerances of form and position shall conform to those specified in ISO 8788. Details of form not stated are at the manufacturer's option.

- 1) These values, in micrometres, apply before any surface coating(s) is (are) applied. The values do not apply to threads, punched holes or shear edges, the surface texture of which will be as achieved by the usual manufacturing methods.
- 2) Tooling marks permissible in this area.

Figure 1

Table 1

Diameter code	Thread 1)	C	D max.	E	F	G min.	H min.	J ²⁾ max.	K max.	L max.	M max.	N max.	P ³⁾ max.	Q max.	R ≈	S	T max.	V ± 0,25
030	MJ3 × 0,5 – 4H6H	—	—	6	6	—	—	4,6	6	17,7	3,2	—	—	2,5	—	1,6	—	—
040	MJ4 × 0,7 – 4H6H	0,4	6,6	8,5	8	4,4	2,2	6,2	8	23,7	5,8	1,1	11	13	3	2,5	2,9	4,8
050	MJ5 × 0,8 – 4H6H		8,1	9,5		5,5	2,4	7,3	9	25,2	6,9	11,4	13,4	3,5				
060	MJ6 × 1 – 4H5H		9,2	11		6,5	2,7	8,7	10	27,7	8,1	1,3	12,7	14,7			4	
080	MJ8 × 1 – 4H5H	0,5	12,8	11	8,5	8,5	3	10,9	13	29,7	9,9	1,7	15	18	3,5	3	5	5,7
100	MJ10 × 1,25 – 4H5H		15			13		10,5	12,9	16,2	34,3	12	1,9	20,2			22	4,5

- 1) In accordance with ISO 5855-2. In self-locking zone, the tolerances apply before forming out-of-round.
- 2) Measured at sharp corners (chamfered) or points of tangency (radiused).
- 3) Maximum protrusion of the bolt

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3168:1998

<https://standards.iteh.ai/catalog/standards/sist/19941910-9fcf-432a-88a5-d273dd95990/iso-3168-1998>

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 3168:1998

<https://standards.iteh.ai/catalog/standards/sist/19941910-9fcf-432a-88a5-d273dd95990/iso-3168-1998>

ICS 49.030.30

Descriptors: aircraft industry, fasteners, MJ threads, s (fasteners), anchor nuts, self-locking nuts, single-lug nuts, counterbo re nuts, classification, form specifications, dimensions.

Price based on 2 pages
