
**Information technology — Automatic
identification and data capture
techniques — Bar code digital imaging and
printing performance testing**

*Technologies de l'information — Techniques d'identification automatique et
de capture des données — Test de performance de la numérisation
digitale et l'impression des codes à barres*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 15419:2001](https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001)

<https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001>

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 15419:2001](https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001)

<https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001>

© ISO/IEC 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

Page

Foreword.....	vi
Introduction.....	vii
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions	1
4 Bar code design software	3
4.1 General requirements	3
4.1.1 Data Input	3
4.1.2 Quiet zones.....	4
4.2 Considerations by software and imaging device categories	4
4.2.1 Direct bar code imaging devices	4
4.2.2 Indirect bar code imaging devices	6
4.3 Test requirements	8
4.3.1 System configuration.....	8
4.3.2 Test procedure	8
4.4 Conformance.....	9
4.5 Test report	9
4.6 Certification	10
4.7 Software specification	10
5 Dedicated bar code printers	10
5.1 Data input requirements	11
5.2 Test requirements	11
5.2.1 Selection of equipment for testing	11
5.2.2 Test conditions.....	11
5.2.3 Test procedure	12
5.2.4 Conformance.....	13
5.2.5 Test report	13
5.3 Certification and labeling.....	14
5.4 Equipment specification	14
Annex A (normative) Sample test layout.....	15
Annex B (normative) General constructional and operational requirements.....	17
B.1 Installation, operation, and maintenance - general.....	17
B.1.1 Power supply.....	17
B.1.2 Temperature	17
B.1.3 Humidity	17
Annex C (informative) Maintenance and supplies	18
C.1 Thermal printers	18
C.2 General-purpose office printers	19
Annex D (informative) Classification of software categories	20
D.1 Bar code fonts.....	20
D.2 General purpose label design software	20
D.3 Printer drivers.....	20
D.4 General purpose software (e.g. word processing, database).....	20

D.5	Bar code controller.....	20
D.6	Bar code origination software	21
Annex E (informative) Classification of imaging device categories.....		22
Annex F (informative) Programmer's examples.....		24
F.1	Programmer's example for general-purpose printers	24
F.2	Programmer's example for indirect bar code imaging devices.....	26
F.3	Programmer's example for symbols distorted for plate roll circumference.....	28
Annex G (informative) Functions of bar code production software.....		29

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 15419:2001](https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001)

<https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001>

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 15419 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 31, *Automatic identification and data capture techniques*.

Annexes A and B form a normative part of this International Standard. Annexes C to G are for information only.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 15419:2001](https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001)

<https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001>

Introduction

The technology of bar coding is based on the recognition of patterns encoded in bars and spaces of defined dimensions according to rules defining the translation of characters into such patterns, known as the symbology specification.

Bar code digital imaging systems must be capable of reliably converting the information to be encoded into a bar code symbol meeting the symbology specification and application requirements, if the technology is to fulfil its basic objective. Such systems comprise two major components, namely the hardware device which produces the physical image of the bar code symbol on paper, photographic film, printing plate, or other substrate, and the associated software which converts the input data into digital instructions used to drive the hardware device. Each component can take many forms and perform differing functions.

Manufacturers of bar code equipment, the producers of bar code symbols and the users of bar code technology therefore require publicly available standard test specifications for bar code digital imaging systems, to ensure the accuracy and consistency of performance of these systems. This International Standard is intended to lay down general principles governing the bar code image generation function in each component, supplemented by more specific details applicable to certain major categories of software and hardware.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 15419:2001](https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001)

<https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001>

Information technology — Automatic identification and data capture techniques — Bar code digital imaging and printing performance testing

1 Scope

This International Standard describes the characteristics of, and defines categories of, bar code digital imaging systems, identifies the attributes of each system which are required to be controlled, and specifies minimum requirements for those attributes. It defines test methods for assessing the conformance of those attributes with this International Standard. This standard is intended to be used in conjunction with International Standards which detail the methodology for assessing the quality of a bar code symbol such as ISO/IEC 15416. This International Standard does not apply to Bar Code Masters that are covered by ISO/IEC 15421.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO/IEC 15416, *Information technology — Automatic identification and data capture techniques — Bar code print quality test specification — Linear symbols.*

ISO/IEC 15417, *Information technology — Automatic identification and data capture techniques — Bar code symbology specification — Code 128.*

ISO/IEC 15420, *Information technology — Automatic identification and data capture techniques — Bar code symbology specification — EAN/UPC.*

ISO/IEC 15426-1, *Information technology — Automatic identification and data capture techniques — Bar code verifier conformance specification — Part 1: Linear symbols.*

ISO 2859-1, *Sampling procedures for inspection by attributes — Part 1: Sampling schemes indexed by acceptable quality level (AQL) for lot-by-lot inspection.*

EN 1556, *Bar coding — Terminology.*

3 Terms and definitions

For the purposes of this International Standard, the terms and definitions given in EN1556 and the following apply.

ISO/IEC 15419:2001(E)

3.1

addressable imaging resolution

The maximum number of image positions per unit length (e.g. dots per millimeter) along a straight line that can be addressed by the bar code designer. This resolution would exclude further resolution enhancing techniques performed by the imaging device or software, which are beyond the control of the designer.

3.2

adjusted BWC

The value of BWC after adjustment to match addressable imaging resolution.

3.3

bar width compensation (BWC)

The extent by which the width of the bars on a machine-readable symbol, Bar Code Master, or digital bar code file is reduced/increased in order to correct for expected print or imaging gain/loss.

3.4

bar width increase (BWI)

The extent by which the width of the bars on a machine-readable symbol, Bar Code Master, or digital bar code file is increased in order to correct for expected print or imaging loss.

3.5

bar width reduction (BWR)

The extent by which the width of the bars on a machine-readable symbol, Bar Code Master, or digital bar code file is reduced in order to correct for expected print or imaging gain.

3.6

bit map

An electronic representation of the individual pixels making up the image to be output by the imaging device.

3.7

consumables

Print media, i.e. materials that need to be supplied by the user on a regular basis, e.g. ribbons, labels or printing substrates, toner and ink.

3.8

dedicated bar code printer

A printing device with the resident intelligence capable of converting data into bar code symbols.

3.9

digital bar code file

A bar code which is designed and stored in a digitized format.

3.10

digital bar code imaging system

A system which comprises the necessary software and hardware components to produce a bar code image.

3.11

distortion

The process by which the height to width ratio of a piece of artwork is modified to compensate for the dimensional change which is introduced to an image, when a flexible, relief printing plate is wrapped around the print cylinder of a rotary printing press.

3.12

disproportioning

See Distortion.

3.13**general purpose printer**

A printing device without the resident processing ability to convert data sequences into valid bar code symbol, (e.g. an office printer).

3.14**imagesetter**

A device used to output a computer image at an addressable resolution onto a photographic film, paper, or printing plate.

3.15**imaging tool**

A mechanism that transfers an image directly or indirectly to a printed substrate.

3.16**rounding errors**

An allocation of imaging device dots to bar or space modules in an inconsistent manner, (i.e. where all of the modules based on the user's target dimensions fail to be composed of a consistent number of dots).

4 Bar code design software

The testing procedures in this section are intended to report the conditions under which software, in conjunction with a printing device, is capable of producing quality symbols. The tests performed under the reported conditions will typically be performed in a controlled setting. Ongoing verification of symbols produced in an operational setting should be performed using the methodology contained in ISO/IEC 15416. In addition, visual checks should be performed to confirm the correct formatting of the symbol in accordance with the symbology and other applicable specifications. Further guidance on equipment maintenance and supplies is found in Annex C.

<https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001>

4.1 General requirements**4.1.1 Data Input**

The human-readable text and symbol characters for all symbols should, wherever possible, be generated from the same key entry input. The software should apply appropriate formatting algorithms to meet relevant application standards.

The input process should also allow for the input of relevant symbol parameters such as target X dimension or magnification factor, wide:narrow ratio, and bar height, where these are user-definable according to the symbology specification; such input shall be subject to the capabilities of the imaging or printing system, in particular the adjustment of target element dimensions as described in the subclauses of 4.2.

Check characters for encoded data shall either be calculated or verified by the software. For example, if the software prompts for the entry of only twelve digits for an EAN-13 symbol, the software shall automatically calculate the check character. Alternatively, the software might prompt for the entry of thirteen digits and indicate an error if the check character input is incorrect. The latter approach assures that valid data has been entered.

It is desirable for the input data to be displayed when the label or layout is designed, subject to the limitations of the display device, to enable the operator to validate it. Optionally, the software may also display the symbol characters encoded.

ISO/IEC 15419:2001(E)

4.1.2 Quiet zones

The software should indicate, either graphically or in text, the appropriate area surrounding the symbol required for quiet zones.

NOTE In order to ensure that the minimum quiet zones are respected when printing or positioning the symbol, if for example print growth or variations in print to substrate register are expected, adjustment of the position of any graphical mark on the digital image adjacent to the quiet zone boundary, or of the position of the symbol relative to the edges of the area in which, or substrate on which, it is to be printed, may be required.

4.2 Considerations by software and imaging device categories

Refer to Annex D for a review of software categories and Annex E for a review of imaging device categories.

4.2.1 Direct bar code imaging devices

This section provides software design requirements for imaging devices that create the final bar code symbol on the substrate. This category is divided into the two sub-categories, dedicated bar code printer software and general-purpose printer software.

4.2.1.1 Dedicated bar code printers

This section provides software requirements for dedicated bar code printers. Dedicated bar code printers contain all of the low-level software required to generate bar code symbols. This means that various symbol formats are stored in the firmware specific to the printer. The bar code design software simply sends commands to address the firmware in the printer to create the symbol. These commands typically relate to data characters, element sizes (typically expressed as a multiple of addressable dots), symbol orientation, and symbol placement.

4.2.1.1.1 Adjustment of target element dimensions

This procedure is intended to produce symbols with a revision in the target module width of the symbol to eliminate rounding errors. The software must be able to make adjustments to symbol character element widths based on the output resolution specified. This means the overall symbol width will be adjusted to produce an integer number of addressable dots consistently across all element widths. For symbols with a fixed aspect ratio, a proportional adjustment should be applied to the module height (Y-dimension).

These adjustments should be made by rounding down to the closest integer value, provided the value falls within the range of widths prescribed by the symbology specification or application standard. Rounding down is preferred because rounding up could cause reduction of or interference in the area allocated to the quiet zone. Quiet zone reduction could result from selecting a label width that is very close to the target symbol width. Quiet zone interference could result from adjacent graphic layout images remaining constant as the symbol width expands. When symbol module widths are rounded up, the software should clearly indicate the required quiet zone area to the designer.

Refer to Annex F for a programmer's example for an illustration of this procedure.

4.2.1.1.2 Record of design attributes

Digital bar code files for dedicated bar code printers are generally created for a specific printer make and model at a specific resolution. It is wise for the party printing the symbol to create the bar code at the production stage closest to the symbol output. When this is not possible and the digital bar code file is transferred between two parties, certain design attributes should be communicated. The following design attributes should be communicated for dedicated bar code printers to ensure symbol quality in the output stage:

The output resolution specified for symbol output

The adjusted symbol module dimensions based on the specified output resolution (see 4.2.1.1.1)

4.2.1.2 General purpose printers

This section provides software requirements for general-purpose printers. General-purpose printers do not contain low-level software for generating bar code symbols.

4.2.1.2.1 Adjustment of target element dimensions

This procedure is intended to produce symbols with a revision in the target module width of the symbol to eliminate rounding errors. The software must be able to make adjustments to symbol character element widths based on the output resolution specified. This means the overall symbol width will be adjusted to produce an integer number of addressable dots consistently across all element widths. For symbols with a fixed aspect ratio, a proportional adjustment should be applied to the module height (Y-dimension).

These adjustments should be made by rounding down to the closest integer value, provided the value falls within the range of widths prescribed by the symbology specification or application standard. Rounding down is preferred because rounding up could cause reduction or interference in the area allocated to the quiet zone. Quiet zone reduction could result from selecting a label width that is very close to the target symbol width. Quiet zone interference could result from adjacent graphic layout images remaining constant as the symbol width expands. When symbol module widths are rounded up, the software should clearly indicate the required quiet zone area to the designer.

Refer to Annex F for a programmer's example for an illustration of this procedure.


4.2.1.2.2 Adjusted BWC

[ISO/IEC 15419:2001](https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001)

[https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-](https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001)

[1e8abe67af00/iso-iec-15419-2001](https://standards.iteh.ai/catalog/standards/sist/17428e29-20a4-43e7-b945-1e8abe67af00/iso-iec-15419-2001)

The printed dot width for general-purpose printers is typically larger than the measurement between the centers of two adjacent dots (pixel dimension) as shown on the right grid in Figure 1.

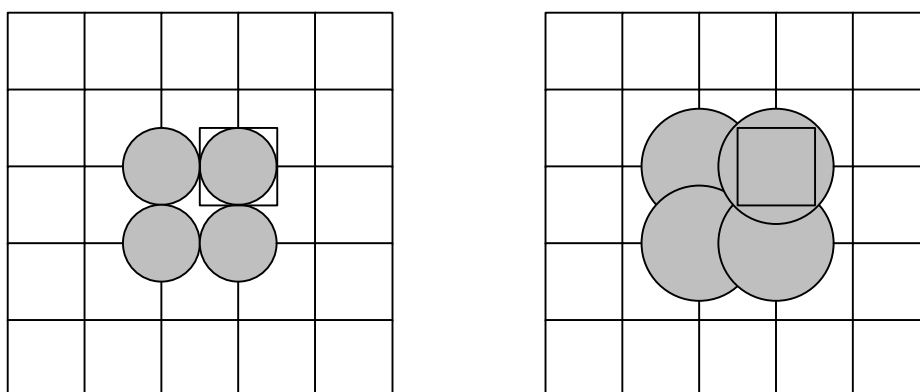

Dot width equal to pixel width (left) and dot width oversize compared to pixel width (right)

Figure 1 — General purpose printer dot / pixel comparison

This enlarged dot size causes the bars to be printed wider and the spaces narrower than nominal, unless the software driving the printer corrects for this condition. BWC is a procedure that is commonly performed during bar code design, which compensates for the bar width gain or loss experienced in the printing process.

ISO/IEC 15419:2001(E)

Adjusted BWC is the result of a procedure, which has been introduced to make BWC result in a consistent, integer number of addressable imaging device dots based on the specified output resolution. The two types of BWC are BWR and BWI. When print gain is anticipated, BWR is used. Adjustments to BWR should be made by rounding up to the closest integer value. Rounding up is preferred because slightly narrower bars are preferred to slightly narrower spaces. When print loss is anticipated, BWI is used. Adjustments to BWI should be made by rounding down to the closest integer value. Rounding down is preferred because slightly narrower bars are preferred to slightly narrower spaces.

Refer to Annex F for a programmer's example for an illustration of this procedure.

4.2.1.2.3 Record of design attributes

If the printer supplies are appropriate and the printer's operating condition is maintained, the printer should provide quality symbols when the output conditions match the specified design attributes and the symbol has not been distorted by importing it into a secondary illustration or page layout software package. It is wise for the party printing the symbol to create the bar code at the production stage closest to the symbol output. When this is not possible and the digital bar code file is transferred between two parties, certain design attributes should be communicated. The following design attributes should be communicated for general-purpose printers to ensure symbol quality in the output stage:

The output resolution specified for symbol output

The adjusted symbol module dimensions based on the specified output resolution

The adjusted BWC (bar width compensation) based on the specified output resolution

4.2.2 Indirect bar code imaging devices

ISO/IEC 15419:2001

This section provides software requirements for indirect imaging devices (e.g. imagesetters). Imagesetters commonly process and produce photographic film or paper, which is then used to produce imaging tools (e.g. printing plates) for traditional printing presses. Imagesetters may be used to produce bar code symbols directly where high-resolution symbols are required. Imagesetters can also be used to produce printing plates directly (e.g. direct-to-plate imaging).

4.2.2.1 Adjustment of target element dimensions

This procedure is intended to produce symbols with a revision in the target module width of the symbol to eliminate rounding errors. The software must be able to make adjustments to symbol character element widths based on the output resolution specified. This means the overall symbol width will be adjusted to produce an integer number of addressable dots consistently across all element widths. For symbols with a fixed aspect ratio, a proportional adjustment should be applied to the module height (Y-dimension).

These adjustments should be made by rounding down to the closest integer value, provided the value falls within the range of widths prescribed by the symbology specification or application standard. Rounding down is preferred because rounding up could cause reduction or interference in the area allocated to the quiet zone. Quiet zone reduction could result from selecting a label width that is very close to the target symbol width. Quiet zone interference could result from adjacent graphic layout images remaining constant as the symbol width expands. When symbol module widths are rounded up, the software should clearly indicate the required quiet zone area to the designer.

Refer to Annex F for a programmer's example for an illustration of this procedure.