



SLOVENSKI STANDARD SIST EN 12039:2016

01-september-2016

Nadomešča:
SIST EN 12039:2000

Hidroizolacijski trakovi - Bitumenski trakovi za tesnjenje streh - Določevanje sprijemljivosti posipa

Flexible sheets for waterproofing - Bitumen sheets for roof waterproofing - Determination
of adhesion of granules

Abdichtungsbahnen - Bitumenbahnen für Dachabdichtungen - Bestimmung der
Bestreuungshaftung

Feuilles souples d'étanchéité - Feuilles d'étanchéité de toiture bitumineuses -
Détermination de l'adhérence des granulats

Ta slovenski standard je istoveten z: EN 12039:2016

ICS:

91.060.20	Strehe	Roofs
91.100.50	Veziva. Tesnilni materiali	Binders. Sealing materials

SIST EN 12039:2016 en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 12039:2016

<https://standards.iteh.ai/catalog/standards/sist/0e1dd919-5479-46e8-8895-9a3cflbb2676/sist-en-12039-2016>

EUROPEAN STANDARD

EN 12039

NORME EUROPÉENNE

EUROPÄISCHE NORM

June 2016

ICS 91.100.50

Supersedes EN 12039:1999

English Version

Flexible sheets for waterproofing - Bitumen sheets for roof waterproofing - Determination of adhesion of granules

Feuilles souples d'étanchéité - Feuilles d'étanchéité de toiture bitumineuses - Détermination de l'adhérence des granulats

Abdichtungsbahnen - Bitumenbahnen für Dachabdichtungen - Bestimmung der Bestreuungshaftung

This European Standard was approved by CEN on 20 May 2016.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents	Page
European foreword.....	3
1 Scope	4
2 Normative references	4
3 Terms and definitions	4
4 Principle	4
5 Apparatus	4
6 Preparation of test samples and test specimens	5
6.1 Sampling	5
6.2 Sampling and preparation of test specimens	5
7 Procedure	5
8 Expression of results	5
9 Accuracy	6
10 Test report	6
Annex A (normative) Brush model and area brushed	7
Annex B (normative) Determination of the initial mass of granules	8
B.1 Apparatus and materials	8
B.2 Specimens	8
B.3 Procedure	8
B.4 Calculation and expression of results	8

European foreword

This document (EN 12039:2016) has been prepared by Technical Committee CEN/TC 254 "Flexible sheets for waterproofing", the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 2016, and conflicting national standards shall be withdrawn at the latest by December 2016.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 12039:1999.

List of main changes since this new edition:

- a) editorial changes;
- b) replacement of ISO 565 in B.1.2.

According to the CEN-CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

[SIST EN 12039:2016](https://standards.iteh.ai/catalog/standards/sist/0e1dd919-5479-46e8-8895-9a3cflbb2676/sist-en-12039-2016)

<https://standards.iteh.ai/catalog/standards/sist/0e1dd919-5479-46e8-8895-9a3cflbb2676/sist-en-12039-2016>

1 Scope

This European Standard applies to the apparatus and the test procedure used for the determination of the adhesion of granules to factory made bituminous sheets for roofing. It can also be used in other areas where it is relevant.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 13416:2001, *Flexible sheets for waterproofing - Bitumen, plastic and rubber sheets for roof waterproofing - Rules for sampling*

ISO 3310-1, *Test sieves — Technical requirements and testing — Part 1: Test sieves of metal wire cloth*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

surface

upper side of the sheet, as used in situ; which is usually the inside of the roll

3.2

granule

particle which does not pass a sieve as defined in B.1.2

4 Principle

The method determines the adhesion of granules during a brushing test under specified conditions. The mass of brushed-off granules is compared to the original mass of granules on a test specimen cut off from the same roll.

5 Apparatus

5.1 Brushing machine, working automatically to perform outward and return cyclic linear movements between a replaceable brush applied with a force of $(21,5 \pm 0,5)$ N on the surface of the test specimen, and the test specimen itself. The constant amplitude A of the relative movement of the axis of the replaceable brush is (200 ± 20) mm, and the average displacement speed is such that 50 cycles are achieved within (55 ± 5) s. The brushing machine shall include suitable clamps, at least 50 mm wide, to restrain the ends of the specimen.

5.2 Replaceable brush, consisting of a block of a suitable material in which 22 holes are drilled as indicated in Figure A.1, with a 4 mm diameter. From each hole, 22 polyamide 66 yarns, diameter 0,80 mm project (16 ± 2) mm.

The effective area of the replaceable brush, when loaded, is 80 mm × 25 mm. The effective brushed area B , as shown in Figure A.2, is $[(A + 80) \times 25]$ mm².

A single replaceable brush shall be used for a maximum of 100 tests of fewer if yarns are projecting less than 13 mm from a hole.

5.3 Balance, accurate to the nearest 0,01 g.

5.4 Machine, to cut or die-cut test specimens with a width of (50 ± 1) mm in the desired length.

5.5 Room for conditioning, temperature (23 ± 2) °C and (50 ± 20) % relative humidity.

5.6 Household vacuum cleaner, 500 W, sucking air through an accessory 50 mm wide.

6 Preparation of test samples and test specimens

6.1 Sampling

Sampling in accordance with EN 13416:2001.

6.2 Sampling and preparation of test specimens

Test specimens shall be cut or die-cut in the dimension (50 ± 1) mm wide, length minimum 285 mm, from the samples in the length direction of the sheet.

Condition five test specimens for $(24 \pm 0,5)$ h in the climate room at (23 ± 2) °C. Suck the loose granules from the test specimens carefully moving the vacuum cleaner accessory over their surfaces. Determine the mass M_{1i} of each test specimen to the nearest 0,01 g.

7 Procedure

The mass of brushed-off granules is compared to the initial mass of granules of the test specimens cut from the same roll and in the same position on the sheet with respect either to its axis or right side or left side.

Determine the initial mass of granules in accordance with Annex B.

Secure the test specimen onto the brushing machine using the clamps, and place the loaded replaceable brush on the test specimen, the length of the replaceable brush being in the length direction of the specimen (see Figure A.2).

Perform 50 cycles and remove the test specimen from the brushing machine.

Repeat the procedure for each test specimen.

Suck the loose granules from the test specimens moving the vacuum cleaner accessory over their surfaces. Determine the mass M_{2i} of each test specimen to within 0,01 g.

8 Expression of results

Determine the adhesion of granules (M_i), expressed as percentage of relative difference between the two masses of each test specimen using Formula (1):

$$M_i = \frac{M_{1i} - M_{2i}}{B \times G_0} \times 100 \quad (1)$$

where

G_0 is the initial mass of granules per 1 m² in the same third of the sample where the specimens were cut in accordance with EN 13416:2001, in gram/square metre (g/m²), as determined in Annex B;

M_{1i} is the mass of the test specimen before brushing, in gram (g);

M_{2i} is the mass of the test specimen after brushing, in gram (g);

EN 12039:2016 (E)

B is the area effectively brushed, in square metre (m²).

9 Accuracy

The precision of the method is not specified.

NOTE No report on interlaboratory tests on repeatability, r , or on reproducibility, R , is available. The accuracy will be specified when sufficient interlaboratory data are available.

10 Test report

The test report shall include at least the following information:

- a) all details necessary to identify the product tested;
- b) a reference to this European Standard and any deviation from it;
- c) information on sampling and details on preparation of test specimens in accordance with Clause 6;
- d) information on the test procedure in accordance with Clause 7;
- e) the test results in accordance with Clause 8;
- f) date of the test.


iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 12039:2016

<https://standards.iteh.ai/catalog/standards/sist/0e1dd919-5479-46e8-8895-9a3cf1bb2676/sist-en-12039-2016>

Annex A (normative)

Brush model and area brushed

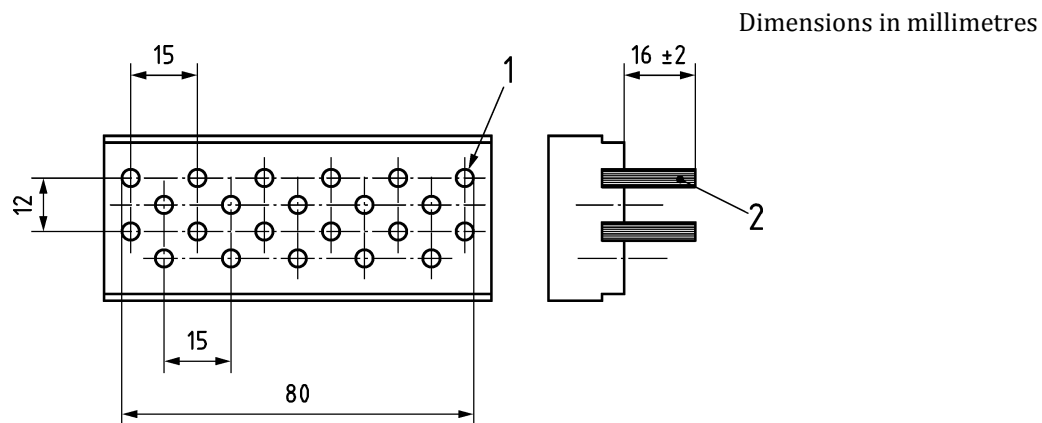


Key

- 1 22 holes $\varnothing 4$
- 2 22 wires $\varnothing 0,8$

iTeh STANDARD PREVIEW

(standards.iteh.ai)

Figure A.1 — Brush model

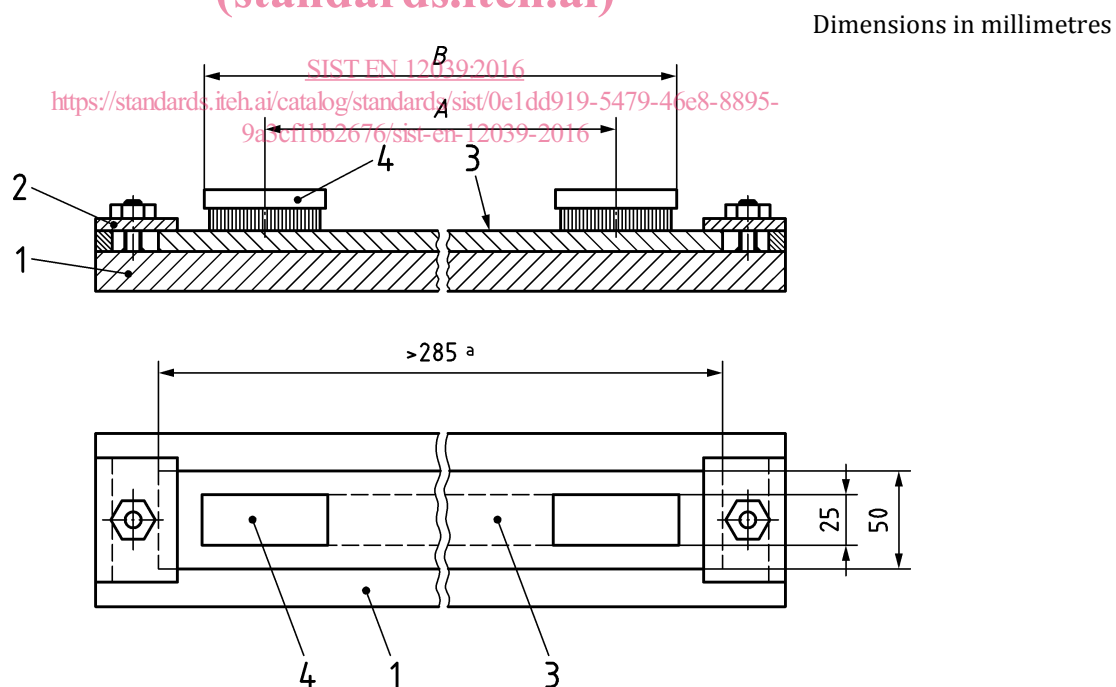

Key

- 1 support
- 2 fixing clamp for specimen (example)
- 3 test specimen
- 4 replaceable brush

Figure A.2 — Area brushed