

---

---

**Plastics piping systems for industrial applications — Acrylonitrile-butadiene-styrene (ABS), unplasticized poly(vinyl chloride) (PVC-U) and chlorinated poly(vinyl chloride) (PVC-C) — Specifications for components and the system — Metric series**

*Systèmes de canalisations en matières plastiques pour les applications industrielles — Acrylonitrile-butadiène-styrène (ABS), poly(chlorure de vinyle) non plastifié (PVC-U) et poly(chlorure de vinyle) chloré (PVC-C) — Spécifications pour les composants et le système — Série métrique*



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 15493:2003

<https://standards.iteh.ai/catalog/standards/sist/0e40fb84-6cd9-423c-ae05-4cb3e77c1096/iso-15493-2003>

© ISO 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Contents

	Page
Foreword .....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	2
3 Terms and definitions .....	4
4 Symbols and abbreviated terms.....	7
5 Material.....	8
6 General characteristics.....	10
7 Geometrical characteristics .....	10
8 Mechanical characteristics.....	11
9 Physical characteristics .....	11
10 Chemical characteristics .....	12
11 Adhesives .....	12
12 Performance requirements.....	12
13 Classification of components .....	13
14 Design of a thermoplastics piping system for industrial applications.....	13
15 Installation of piping systems.....	13
16 Declaration of compliance.....	14
17 Marking.....	14
<b>Annex A (normative) Specific characteristics and requirements for industrial piping systems made from acrylonitrile-butadiene-styrene (ABS).....</b>	<b>16</b>
<b>Annex B (normative) Specific characteristics and requirements for industrial piping systems made from unplasticized poly(vinyl chloride) (PVC-U).....</b>	<b>30</b>
<b>Annex C (normative) Specific characteristics and requirements for industrial piping systems made from chlorinated poly(vinyl chloride) (PVC-C) .....</b>	<b>44</b>
<b>Bibliography.....</b>	<b>62</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 15493 was prepared by Technical Committee ISO/TC 138, *Plastics pipes, fittings and valves for the transport of fluids*, Subcommittee SC 3, *Plastics pipes and fittings for industrial applications*.

This document has been prepared under a mandate given by the European Commission and the European Free Trade Association and supports essential requirements of EU Directives.

At the date of publication of this International Standard, the following standards had been published for piping systems, used for industrial applications, made from other types of plastic:

ISO 10931 (all parts), *Plastics piping systems for industrial applications — Poly(vinylidene fluoride) (PVDF)*

ISO 15494, *Plastics piping systems for industrial applications — Polybutene (PB), polyethylene (PE) and polypropylene (PP) — Specifications for components and the system — Metric series*.

Annexes A, B and C form a normative part of this International Standard.

## Introduction

This International Standard specifies the characteristics and requirements for a piping system and its components made from acrylonitrile-butadiene-styrene (ABS), unplasticized poly(vinyl chloride) (PVC-U) or chlorinated poly(vinyl chloride) (PVC-C), as applicable, intended to be used for industrial applications above ground by authorities, design engineers, certification bodies, inspection bodies, test laboratories, manufacturers and users.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 15493:2003](https://standards.iteh.ai/catalog/standards/sist/0e40fb84-6cd9-423c-ae05-4cb3e77c1096/iso-15493-2003)

<https://standards.iteh.ai/catalog/standards/sist/0e40fb84-6cd9-423c-ae05-4cb3e77c1096/iso-15493-2003>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 15493:2003

<https://standards.iteh.ai/catalog/standards/sist/0e40fb84-6cd9-423c-ae05-4cb3e77c1096/iso-15493-2003>

# Plastics piping systems for industrial applications — Acrylonitrile-butadiene-styrene (ABS), unplasticized poly(vinyl chloride) (PVC-U) and chlorinated poly(vinyl chloride) (PVC-C) — Specifications for components and the system — Metric series

## 1 Scope

This International Standard specifies the characteristics and requirements for components such as pipes, fittings and valves made from one of the following materials:

- acrylonitrile-butadiene-styrene (ABS);
- unplasticized poly(vinyl chloride) (PVC-U);
- chlorinated poly(vinyl chloride) (PVC-C);

intended to be used for thermoplastics piping systems in above-ground industrial applications.

This International Standard is applicable to ABS, PVC-U or PVC-C pipes, fittings, valves and ancillary equipment, to their joints and to joints with components made of other plastics and non-plastics materials, depending on their suitability, intended to be used for the conveyance of liquid and gaseous fluids as well as of solid matter in fluids for industrial applications such as:

- chemical plants;
- industrial sewerage engineering;
- power engineering (cooling and general-purpose water supply);
- electroplating and pickling plants;
- the semiconductor industry;
- agricultural production plants;
- water treatment.

NOTE 1 Where relevant, national regulations for specific applications (e.g. water treatment) apply.

Other application areas are permitted if the requirements of this International Standard and/or applicable national requirements are fulfilled.

Relevant regulations in respect of fire behaviour and explosion risk are applicable if applications are envisaged for inflammable media.

The components have to withstand the mechanical, thermal and chemical demands to be expected and have to be resistant to the fluids to be conveyed.

Characteristics and requirements which are applicable to all three materials (ABS, PVC-U and PVC-C) are covered by the relevant clauses of this International Standard. Those characteristics and requirements which are dependent on the material are given for each material in the relevant annex (see Table 1).

**Table 1 — Material-specific annexes**

Material	Annex
Acrylonitrile-butadiene-styrene (ABS)	A
Unplasticized poly(vinyl chloride) (PVC-U)	B
Chlorinated poly(vinyl chloride) (PVC-C)	C

NOTE 2 Components conforming to any of the product standards listed in the bibliography or to national standards, as applicable, may be used with components conforming to this International Standard provided they conform to the requirements for joint dimensions and to the other relevant requirements of this standard.

## 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 7-1, *Pipe threads where pressure-tight joints are made on the threads — Part 1: Dimensions, tolerances and designation*

ISO 15493:2003

<https://standards.iteh.ai/catalog/standards/sist/0e40fb84-6cd9-423c-ae05-1c9577d19768/iso-15493-2003>

ISO 228-1, *Pipe threads where pressure-tight joints are not made on the threads — Part 1: Dimensions, tolerances and designation*

ISO 265-1, *Pipes and fittings of plastics materials — Fittings for domestic and industrial waste pipes — Basic dimensions: Metric series — Part 1: Unplasticized poly(vinyl chloride) (PVC-U)*

ISO 306, *Plastics — Thermoplastic materials — Determination of Vicat softening temperature (VST)*

ISO 472, *Plastics — Vocabulary*

ISO 580:—<sup>1</sup>, *Injection-moulded unplasticized poly(vinyl chloride) (PVC-U) fittings — Oven test — Test method and basic specifications*

ISO 727-1, *Fittings made from unplasticized poly(vinyl chloride) (PVC-U), chlorinated poly(vinyl chloride) (PVC-C) or acrylonitrile/butadiene/styrene (ABS) with plain sockets for pipes under pressure — Part 1: Metric series*

ISO 1043-1, *Plastics — Symbols and abbreviated terms — Part 1: Basic polymers and their special characteristics*

ISO 1158, *Plastics — Vinyl chloride homopolymers and copolymers — Determination of chlorine content*

ISO 1167:1996, *Thermoplastics pipes for the conveyance of fluids — Resistance to internal pressure — Test method*

1) To be published. (Revision of ISO 580:1990)



- ISO 1183-2, *Plastics — Methods for determining the density of non-cellular plastics — Part 2: Density gradient column method*
- ISO 2505-1:1994, *Thermoplastics pipes — Longitudinal reversion — Part 1: Determination methods*
- ISO 2505-2:1994, *Thermoplastics pipes — Longitudinal reversion — Part 2: Determination parameters*
- ISO 2507-1, *Thermoplastics pipes and fittings — Vicat softening temperature — Part 1: General test method*
- ISO 2507-2, *Thermoplastics pipes and fittings — Vicat softening temperature — Part 2: Test conditions for unplasticized poly(vinyl chloride) (PVC-U) or chlorinated poly(vinyl chloride) (PVC-C) pipes and fittings and for high impact resistance poly(vinyl chloride) (PVC-HI) pipes*
- ISO 3126, *Plastics piping systems — Plastics piping components — Measurement and determination of dimensions*
- ISO 3127, *Thermoplastics pipes — Determination of resistance to external blows — Round-the-clock method*
- ISO 3514, *Chlorinated polyvinyl chloride (CPVC) pipes and fittings — Specification and determination of density*
- ISO 4065, *Thermoplastics pipes — Universal wall thickness table*
- ISO 9080, *Plastics piping and ducting systems — Determination of the long-term hydrostatic strength of thermoplastics materials in pipe form by extrapolation*
- ISO 9311-1, *Adhesives for thermoplastics piping systems — Part 1: Determination of film properties*
- ISO 9852, *Unplasticized poly(vinyl chloride) (PVC-U) pipes — Dichloromethane resistance at specified temperature (DCMT) — Test method*
- ISO 9853, *Injection-moulded unplasticized poly(vinyl chloride) (PVC-U) fittings for pressure pipe systems — Crushing test*
- ISO/TR 10358, *Plastics pipes and fittings — Combined chemical-resistance classification table*
- ISO 11922-1:1997, *Thermoplastics pipes for the conveyance of fluids — Dimensions and tolerances — Part 1: Metric series*
- ISO 12092, *Fittings, valves and other piping system components made of unplasticized poly(vinyl chloride) (PVC-U), chlorinated poly(vinyl chloride) (PVC-C), acrylonitrile-butadiene-styrene (ABS) and acrylonitrile-styrene-acrylester (ASA) for pipes under pressure — Resistance to internal pressure — Test method*
- ISO 12162, *Thermoplastics materials for pipes and fittings for pressure applications — Classification and designation — Overall service (design) coefficient*
- ISO 15853, *Thermoplastics materials — Preparation of tubular test pieces for the determination of the hydrostatic strength of materials used for injection moulding*
- ISO 16135:—<sup>2)</sup>, *Industrial valves — Ball valves of thermoplastics materials*
- ISO 16136:—<sup>2)</sup>, *Industrial valves — Butterfly valves of thermoplastics materials*
- ISO 16137:—<sup>2)</sup>, *Industrial valves — Check valves of thermoplastics materials*
- ISO 16138:—<sup>2)</sup>, *Industrial valves — Diaphragm valves of thermoplastics materials*
- ISO 16139:—<sup>2)</sup>, *Industrial valves — Gate valves of thermoplastics materials*
- ISO 21787:—<sup>2)</sup>, *Industrial valves — Globe valves of thermoplastics materials*

---

2) To be published.

### 3 Terms and definitions

For the purposes of this International Standard, the terms and definitions given in ISO 472 and ISO 1043-1 and the following apply.

#### 3.1 Geometrical definitions

NOTE The symbols  $d_e$  and  $e$  correspond to  $d_{ey}$  and  $e_y$  given in other International Standards such as ISO 11922-1.

##### 3.1.1 nominal outside diameter

$d_n$   
specified outside diameter of a component, which is identical to the minimum mean outside diameter,  $d_{em,min}$ , in millimetres

NOTE The nominal inside diameter of a socket is equal to the nominal outside diameter of the corresponding pipe.

##### 3.1.2 outside diameter at any point

$d_e$   
outside diameter measured through the cross-section at any point on a pipe, or the spigot end of a fitting, rounded up to the nearest 0,1 mm

##### 3.1.3 mean outside diameter

$d_{em}$   
measured length of the outer circumference of a pipe, or the spigot end of a fitting, divided by  $\pi$  ( $\approx 3,142$ ), rounded up to the nearest 0,1 mm

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

ISO 15493:2003

##### 3.1.4 mean inside diameter of a socket

<https://standards.iteh.ai/catalog/standards/sist/0e40fb84-6cd9-423c-ac05-4cb3e77c1096/iso-15493-2003>

$d_{im}$   
arithmetic mean of two measured inside diameters perpendicular to each other

##### 3.1.5 nominal size of flange

DN  
numerical designation for the size of a flange for reference purposes, related to the manufactured dimension in millimetres

##### 3.1.6 out-of-roundness

difference between the measured maximum outside diameter and the measured minimum outside diameter in the same cross-sectional plane of a pipe, or the spigot end of a fitting, or the difference between the measured maximum inside diameter and the measured minimum inside diameter in the same cross-sectional plane of a socket

##### 3.1.7 nominal wall thickness

$e_n$   
wall thickness, in millimetres, corresponding to the minimum wall thickness,  $e_{min}$

##### 3.1.8 wall thickness at any point

$e$   
measured wall thickness at any point around the circumference of a component, rounded up to the nearest 0,1 mm

### 3.1.9 pipe series S

dimensionless number related to the nominal outside diameter,  $d_n$ , and the nominal wall thickness,  $e_n$

NOTE 1 The pipe series S is related to the pipe geometry as shown in equation (1):

$$S = \frac{d_n - e_n}{2e_n} \quad (1)$$

NOTE 2 Flanges are designated on the basis of PN.

### 3.1.10 standard dimension ratio SDR

ratio of the nominal outside diameter,  $d_n$ , of a pipe to its nominal wall thickness,  $e_n$

NOTE In accordance with ISO 4065, the standard dimension ratio SDR and the pipe series S are related as shown in equation (2):

$$SDR = 2S + 1 \quad (2)$$

## 3.2 Definitions of materials

### 3.2.1 virgin material

material in a form such as granules or powder that has not been previously processed other than for compounding and to which no reprocessable or recyclable materials have been added

### 3.2.2

**reprocessable material** <https://standards.iteh.ai/catalog/standards/sist/0e40fb84-6cd9-423c-ae05-1c9e19619020/iso-15493-2003>  
material prepared from clean unused rejected pipes, fittings or valves, produced in a manufacturer's plant by a process such as moulding or extrusion, which will be reprocessed in the same plant and for which the complete formulation or material specification is known

NOTE 1 Such material may include trimmings from the production of such pipes, fittings and valves.

NOTE 2 In the case of valves, only those thermoplastics parts which are made from material conforming to this International Standard may be considered as reprocessable material.

## 3.3 Definitions related to material characteristics

### 3.3.1 lower confidence limit

$\sigma_{LCL}$

quantity with the dimensions of stress, expressed in megapascals, which can be considered as a property of the material and represents the 97,5 % lower confidence limit of the predicted long-term hydrostatic strength at a given temperature,  $T$ , and time,  $t$ , determined by pressurizing internally with water

### 3.3.2 minimum required strength MRS

value of  $\sigma_{LCL}$  at 20 °C and 50 years, rounded down to the next lower value in the R 10 series when  $\sigma_{LCL}$  is less than 10 MPa, or to the next lower value in the R 20 series when  $\sigma_{LCL}$  is greater than or equal to 10 MPa

NOTE The R 10 and R 20 series are the Renard number series as defined in ISO 3 and ISO 497.

**3.3.3  
design stress**

$\sigma_s$   
allowable stress, in megapascals, for a given application or set of service conditions

NOTE It is derived by dividing the MRS by the coefficient  $C$ , as in equation (3), then rounding to the next lower value in the R 10 or R 20 series, as applicable:

$$\sigma_s = \frac{MRS}{C} \tag{3}$$

**3.3.4  
overall service (design) coefficient**

$C$   
overall coefficient, with a value greater than one, which takes into consideration service conditions as well as the properties of the components of a piping system other than those represented in the lower confidence limit,  $\sigma_{LCL}$

**3.4 Definitions related to service conditions**

**3.4.1  
nominal pressure**

**PN**  
numerical designation used for reference purposes and related to the mechanical characteristics of the components of a piping system

NOTE 1 A pressure, in bars, numerically equal to PN is identical to the maximum allowable pressure, PS, as defined by EU Directive 97/23/ECC (PED), if both pressures are taken at 20 °C.

NOTE 2 For plastics piping systems conveying water, PN corresponds to the maximum continuous operating pressure in bars which can be sustained for water at 20 °C for 50 years, based on the minimum overall service (design) coefficient and calculated using the following equation:

$$PN = \frac{10\sigma_s}{S} = \frac{20\sigma_s}{SDR - 1} \tag{4}$$

where

$\sigma_s$  is expressed in N/mm<sup>2</sup>;

PN is expressed in bars <sup>3)</sup>.

**3.4.2  
hydrostatic stress**

$\sigma$   
stress induced in the wall of a pipe when an internal hydrostatic pressure is applied

NOTE 1 The hydrostatic stress, in megapascals, is related to the applied internal hydrostatic pressure,  $p$ , the wall thickness,  $e$ , at any point and the mean outside diameter,  $d_{em}$ , of a pipe and calculated using the following equation:

$$\sigma = p \times \frac{d_{em} - e}{2e} \tag{5}$$

NOTE 2 Equation (5) is applicable to pipes only.

---

3) 1 bar = 0,1 MPa = 10<sup>5</sup> N/mm<sup>2</sup>.

**3.4.3****long-term hydrostatic stress**

constant hydrostatic stress that is maintained in a component for a sustained period of time

**4 Symbols and abbreviated terms****4.1 Symbols**

$C$	overall service (design) coefficient (design factor)
$d_e$	outside diameter (at any point)
$d_{em}$	mean outside diameter
$d_{im}$	mean inside diameter of socket
$d_n$	nominal outside diameter
DN	nominal size of flange
$e$	wall thickness (at any point)
$e_n$	nominal wall thickness
$l_0$	free length
$p$	internal hydrostatic pressure
$t$	time
$T$	temperature
$\rho$	density of material
$\sigma$	hydrostatic stress
$\sigma_{LCL}$	lower confidence limit
$\sigma_s$	design stress

iTeh STANDARD PREVIEW

(standards.iteh.ai)

[ISO 15493:2003](https://standards.iteh.ai/catalog/standards/sist/0e40fb84-6cd9-423c-ac05-4cb3e77c1096/iso-15493-2003)<https://standards.iteh.ai/catalog/standards/sist/0e40fb84-6cd9-423c-ac05-4cb3e77c1096/iso-15493-2003>**4.2 Abbreviations**

ABS	acrylonitrile-butadiene-styrene
MRS	minimum required strength
PVC-C	chlorinated poly(vinyl chloride)
PVC-U	unplasticized poly(vinyl chloride)
PN	nominal pressure
PS	maximum allowable pressure
PT	test pressure (corresponds to the symbol $p$ usually used)
S	pipe series
SDR	standard dimension ratio
TIR	true impact rate

## 5 Material

### 5.1 General

The material from which the components are made shall be ABS, PVC-U or PVC-C, as applicable, to which are added those additives that are needed to facilitate the manufacture of pipes and fittings conforming to this International Standard.

If additives are used, they shall be uniformly dispersed.

Additives shall not be used, separately or together, in quantities sufficient to impair the fabrication or solvent-cementing characteristics of the components or to impair the chemical, physical or mechanical characteristics as specified in this International Standard.

### 5.2 Hydrostatic strength properties

The material shall be evaluated in accordance with ISO 9080 where a pressure test is carried out in accordance with ISO 1167 to find the MRS-value in accordance with ISO 12162. The test shall be carried out using test pieces of pipe series  $S \leq 12,5$ .

Conformity of the relevant material to the reference curves given for ABS (see Annex A), PVC-U (see Annex B) and PVC-C (see Annex C) shall be demonstrated in accordance with the applicable annex to this International Standard. At least 97,5 % of the data points shall be on or above the reference curves.

The material shall be as classified by the raw-material producer.

Where fittings and valves are manufactured from the same material as pipes, the material classification shall be the same as for pipes.

For the classification of a material intended only for the manufacture of fittings and valves, an injection-moulded or extruded test piece in the form of a pipe shall be used (see Figure 1) and the test pressure applied in accordance with ISO 1167. The free length  $l_0$  shall be  $3d_n$ , as defined in ISO 15853.

### 5.3 Other characteristics of material

Details of requirements on other characteristics of ABS, PVC-U and PVC-C material are given in the applicable annex to this International Standard.

### 5.4 Reprocessable and recyclable material

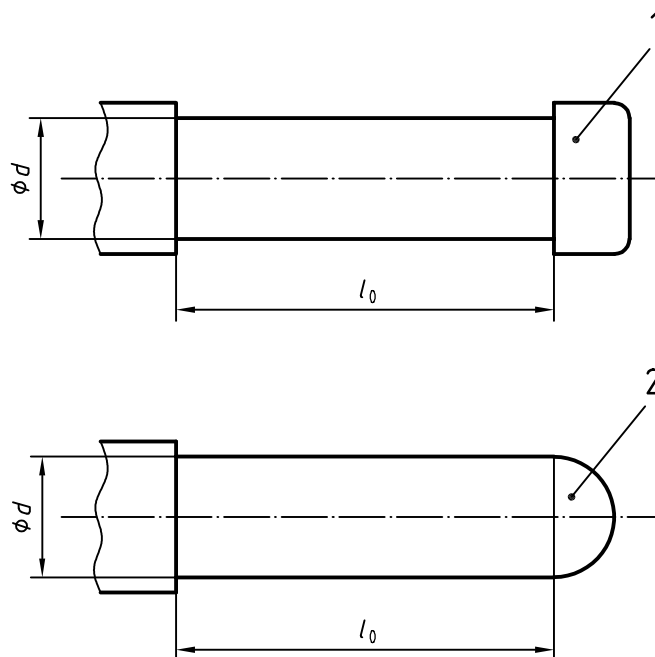
The use of reprocessible material obtained during the production and testing of components in accordance with this International Standard is permitted in addition to virgin material, provided that the requirements of this International Standard are fulfilled.

Reprocessible material obtained from external sources and recyclable material shall not be used.

### 5.5 Parts not made from ABS, PVC-U or PVC-C

#### 5.5.1 General

All components shall conform to the relevant International Standards. Alternative standards may be used in cases where suitable International Standards do not exist. In all cases, the fitness for purpose of the components shall be demonstrated.

**Key**

- 1 End cap
- 2 Injection-moulded end

iTeh STANDARD PREVIEW

(standards.iteh.ai)

**Figure 1 — Free length,  $l_0$ , of test piece**

ISO 15493:2003

Materials and constituent elements used in making a particular component (including rubber, greases and any metal parts that may be used) shall have resistance to the external and internal environments which is comparable to that of all other elements of the piping system.

Materials other than ABS, PVC-U or PVC-C in contact with components conforming to this International Standard shall not adversely effect the performance of the components or initiate stress cracking.

**5.5.2 Metallic materials**

All metal parts susceptible to corrosion shall be adequately protected.

When dissimilar metallic materials are used which can be in contact with moisture, steps shall be taken to avoid galvanic corrosion.

**5.5.3 Sealing materials**

Sealing materials shall have no detrimental effects on the properties of the components, joints and assemblies.

**5.5.4 Other materials**

Greases or lubricants shall not exude onto solvent cement areas and shall not affect the long-term performance of materials conforming to this International Standard.