

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Land Mobile Service;
Radio equipment for analogue and/or digital
communication (speech and/or data) and operating on
narrow band channels and having an antenna connector;
Part 1: Technical characteristics and
methods of measurement**

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/7273a077-e649-4317-a85-f40b5add6a01/etsi-en-301-166-1-v1.3.1-2008-08>



Reference

REN/ERM-TGDMR-271-1

Keywords

analogue, antenna, connector, data, digital,
mobile, PMR, radio, speech

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2008.
All rights reserved.

DECT™, PLUGTESTS™, UMTS™, TIPHON™, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

| | |
|---|----|
| Intellectual Property Rights | 7 |
| Foreword..... | 7 |
| 1 Scope | 8 |
| 2 References | 9 |
| 2.1 Normative references | 9 |
| 2.2 Informative references..... | 9 |
| 3 Definitions, symbols and abbreviations | 10 |
| 3.1 Definitions..... | 10 |
| 3.2 Symbols..... | 11 |
| 3.3 Abbreviations | 12 |
| 4 General | 12 |
| 4.1 Presentation of equipment for testing purposes..... | 12 |
| 4.1.1 Choice of model for testing | 12 |
| 4.1.1.1 Auxiliary test equipment | 13 |
| 4.1.1.2 Declarations by the provider | 13 |
| 5 Test conditions, power sources and ambient temperatures | 13 |
| 5.1 Normal and extreme test conditions | 13 |
| 5.2 Test power source..... | 13 |
| 5.3 Normal test conditions..... | 13 |
| 5.3.1 Normal temperature and humidity..... | 13 |
| 5.3.2 Normal test power source | 14 |
| 5.3.2.1 Mains voltage..... | 14 |
| 5.3.2.2 Regulated lead-acid battery power sources used on vehicles..... | 14 |
| 5.3.2.3 Other power sources..... | 14 |
| 5.4 Extreme test conditions | 14 |
| 5.4.1 Extreme temperatures | 14 |
| 5.4.2 Extreme test source voltages..... | 14 |
| 5.4.2.1 Mains voltage..... | 14 |
| 5.4.2.2 Regulated lead-acid battery power sources used on vehicles..... | 14 |
| 5.4.2.3 Power sources using other types of batteries..... | 15 |
| 5.4.2.4 Other power sources..... | 15 |
| 5.5 Procedure for tests at extreme temperatures..... | 15 |
| 5.5.1 Procedure for equipment designed for continuous transmission..... | 15 |
| 5.5.2 Procedure for equipment designed for intermittent transmission | 15 |
| 5.6 Testing of equipment that does not have an external 50 Ω RF connector (integral antenna equipment) | 16 |
| 6 General test conditions | 16 |
| 6.1 Test signals..... | 16 |
| 6.1.1 Transmitter test signals | 16 |
| 6.1.1.1 Analogue signals (B1)..... | 16 |
| 6.1.1.2 Digital signals (M5, M7)..... | 16 |
| 6.1.2 Receiver test signal for analogue equipment | 17 |
| 6.1.3 Receiver test signals for data (and digitized voice) equipment (M2), (M3), (M4) and (M6) | 17 |
| 6.1.4 Transmitter effective radiated power test signal (C1)..... | 17 |
| 6.2 Test load (artificial antenna)..... | 17 |
| 6.3 PEP..... | 17 |
| 6.4 Encoders..... | 17 |
| 6.5 Modulation processing | 18 |
| 6.6 Test sites and general arrangements for radiated measurements | 18 |
| 6.7 Transmitter automatic shut-off facility..... | 18 |
| 6.8 Arrangement for analogue test signals at the input of the transmitter | 18 |
| 6.9 Arrangement for test signals at the input of the receiver..... | 18 |
| 6.10 Receiver mute or squelch facility | 18 |
| 6.11 Receiver rated audio output power..... | 18 |

| | | |
|----------|--|----|
| 6.12 | Facilities for access | 18 |
| 6.12.1 | Analogue access..... | 18 |
| 6.12.2 | Test points for bit stream measurements..... | 19 |
| 6.12.3 | Coupling arrangements | 19 |
| 6.12.3.1 | Arrangements for measurements with continuous bit streams..... | 19 |
| 6.12.3.2 | Arrangements for measurements with messages..... | 19 |
| 6.12.4 | Modes of operation of the transmitter..... | 19 |
| 6.13 | Duplex equipment | 19 |
| 7 | Technical characteristics of the transmitter..... | 20 |
| 7.1 | Maximum power (PX) (conducted)..... | 20 |
| 7.1.1 | Definition..... | 20 |
| 7.1.2 | Method of measurement | 20 |
| 7.1.3 | Limit | 20 |
| 7.2 | Maximum effective radiated power..... | 20 |
| 7.2.1 | Definition..... | 20 |
| 7.2.2 | Method of measurement | 20 |
| 7.2.2.1 | Evaluation of CW-to-PEP correction factor for signal C1 | 20 |
| 7.2.2.2 | Measurements on a test site..... | 21 |
| 7.2.3 | Limit | 22 |
| 7.3 | Adjacent and alternate channels power | 22 |
| 7.3.1 | Definition..... | 22 |
| 7.3.2 | Methods of measurement..... | 23 |
| 7.3.3 | Limit | 24 |
| 7.4 | Unwanted emissions in the spurious domain..... | 24 |
| 7.4.1 | Definition..... | 24 |
| 7.4.2 | Method of measurement | 25 |
| 7.4.2.1 | Method of measuring conducted spurious emissions (clause 7.4.1 a) in a specified load | 25 |
| 7.4.2.2 | Method of measuring the effective radiated power with an external antenna connector (clause 7.4.1 b)..... | 25 |
| 7.4.2.3 | Method of measuring the effective radiated power with an integral antenna (clause 7.4.1 c) | 26 |
| 7.4.3 | Limits..... | 27 |
| 7.5 | Intermodulation attenuation..... | 28 |
| 7.5.1 | Definition..... | 28 |
| 7.5.2 | Method of measurement | 28 |
| 7.5.3 | Limits..... | 29 |
| 7.6 | Transient power..... | 29 |
| 7.6.1 | Definition..... | 29 |
| 7.6.2 | Method of measurement | 29 |
| 7.6.2.1 | Characteristics of the transient power measuring device | 30 |
| 7.6.3 | Limits..... | 30 |
| 7.7 | Frequency error | 30 |
| 7.7.1 | Definition..... | 31 |
| 7.7.2 | Method of measurement | 31 |
| 7.7.3 | Limits..... | 31 |
| 8 | Technical characteristics of the receiver | 32 |
| 8.1 | Maximum usable sensitivity (analogue, conducted) | 32 |
| 8.1.1 | Definition..... | 32 |
| 8.1.2 | Method of measuring the SINAD ratio..... | 32 |
| 8.1.3 | Limits..... | 32 |
| 8.2 | Maximum usable sensitivity (analogue, field strength)..... | 33 |
| 8.2.1 | Definition..... | 33 |
| 8.2.2 | Method of measurement | 33 |
| 8.2.3 | Limits..... | 34 |
| 8.3 | Maximum usable sensitivity (digital, conducted)..... | 34 |
| 8.3.1 | Definition..... | 34 |
| 8.3.2 | Methods of measurement..... | 34 |
| 8.3.2.1 | Method of measurement with continuous bit streams | 34 |
| 8.3.2.2 | Method of measurement with messages..... | 35 |
| 8.3.3 | Limits..... | 35 |
| 8.4 | Maximum usable sensitivity (digital, field strength)..... | 36 |

| | | |
|-----------|---|----|
| 8.4.1 | Definition..... | 36 |
| 8.4.2 | Method of measurement | 36 |
| 8.4.2.1 | Method of measurement with continuous bit streams | 36 |
| 8.4.2.2 | Method of measurement with messages..... | 37 |
| 8.4.3 | Limits..... | 38 |
| 8.5 | Adjacent channel selectivity..... | 39 |
| 8.5.1 | Definition..... | 39 |
| 8.5.2 | Method of measurement | 39 |
| 8.5.2.1 | Method of measurement (analogue)..... | 39 |
| 8.5.2.2 | Method of measurement (digital with continuous bit stream)..... | 40 |
| 8.5.2.3 | Method of measurement with messages..... | 41 |
| 8.5.3 | Limits..... | 42 |
| 8.6 | Spurious response rejection..... | 42 |
| 8.6.1 | Definition..... | 42 |
| 8.6.2 | Method of measurement | 42 |
| 8.6.2.1 | Introduction to the method of measurement..... | 42 |
| 8.6.2.2 | Method of search over the "limited frequency range"..... | 43 |
| 8.6.2.3 | Method of measurement (analogue)..... | 44 |
| 8.6.2.4 | Method of measurement (digital with continuous bit streams) | 44 |
| 8.6.2.5 | Method of measurement (digital with messages)..... | 45 |
| 8.6.3 | Limits..... | 46 |
| 8.7 | Intermodulation response rejection | 46 |
| 8.7.1 | Definition..... | 46 |
| 8.7.2 | Method of measurement | 46 |
| 8.7.2.1 | Method of measurement (analogue)..... | 46 |
| 8.7.2.2 | Method of measurement (digital with continuous bit stream)..... | 47 |
| 8.7.2.3 | Method of measurement with messages..... | 48 |
| 8.7.3 | Limit | 49 |
| 8.8 | Blocking or desensitization | 49 |
| 8.8.1 | Definition..... | 49 |
| 8.8.2 | Method of measurement | 49 |
| 8.8.2.1 | Method of measurement (analogue)..... | 49 |
| 8.8.2.2 | Method of measurement (digital with continuous bit stream)..... | 50 |
| 8.8.2.3 | Method of measurement with messages..... | 50 |
| 8.8.3 | Limit | 51 |
| 8.9 | Spurious radiations | 52 |
| 8.9.1 | Definition..... | 52 |
| 8.9.2 | Methods of measurement..... | 52 |
| 8.9.2.1 | Method of measuring the power level in a specified load (clause 8.9.1 a)) | 52 |
| 8.9.2.2 | Method of measuring the effective radiated power (clause 8.9.1 b)) | 52 |
| 8.9.2.3 | Method of measuring the effective radiated power (clause 8.9.1 c)) | 53 |
| 8.9.3 | Limits..... | 54 |
| 8.10 | Co-channel rejection..... | 54 |
| 8.10.1 | Definition..... | 54 |
| 8.10.2 | Methods of measurement..... | 54 |
| 8.10.2.1 | Method of measurement (analogue)..... | 54 |
| 8.10.2.2 | Method of measurement (digital with continuous bit stream)..... | 55 |
| 8.10.2.3 | Method of measurement with messages..... | 56 |
| 8.10.3 | Limits..... | 57 |
| 9 | Duplex operation | 57 |
| 9.1 | Receiver desensitization (with simultaneous transmission and reception)..... | 57 |
| 9.1.1 | Definition..... | 57 |
| 9.1.2 | Methods of measurement..... | 58 |
| 9.1.2.1 | Desensitization measured with analogue modulation | 58 |
| 9.1.2.1.1 | Method of measurement when the equipment has a duplex filter | 58 |
| 9.1.2.1.2 | Method of measurement when the equipment has to operate with two antennas | 59 |
| 9.1.2.2 | Desensitization measured with continuous bit streams | 60 |
| 9.1.2.2.1 | Method of measurement when the equipment has a duplex filter | 60 |
| 9.1.2.2.2 | Method of measurement when the equipment has to operate with two antennas | 61 |
| 9.1.2.3 | Desensitization measured with messages..... | 62 |
| 9.1.2.3.1 | Method of measurement when the equipment has a duplex filter | 62 |

| | | |
|--|---|-----------|
| 9.1.2.3.2 | Method of measurement when the equipment has to operate with two antennas | 63 |
| 9.1.3 | Limits..... | 64 |
| 9.2 | Receiver spurious response rejection (with simultaneous transmission and reception) | 64 |
| 9.2.1 | Definition..... | 64 |
| 9.2.2 | Method of measurement | 64 |
| 9.2.3 | Limits..... | 67 |
| 10 | Measurement uncertainty | 68 |
| Annex A (normative): Radiated measurement..... | | 69 |
| A.1 | Test sites and general arrangements for measurements involving the use of radiated fields | 69 |
| A.1.1 | Anechoic chamber..... | 69 |
| A.1.2 | Anechoic chamber with a ground plane | 70 |
| A.1.3 | OATS | 71 |
| A.1.4 | Test antenna..... | 72 |
| A.1.5 | Substitution antenna | 72 |
| A.1.6 | Measuring antenna | 73 |
| A.2 | Guidance on the use of radiation test sites | 73 |
| A.2.1 | Verification of the test site | 73 |
| A.2.2 | Preparation of the EUT..... | 73 |
| A.2.3 | Power supplies to the EUT | 73 |
| A.2.4 | Volume control setting for analogue speech tests | 73 |
| A.2.5 | Range length..... | 74 |
| A.2.6 | Site preparation | 74 |
| A.3 | Coupling of signals..... | 75 |
| A.3.1 | General | 75 |
| A.3.2 | Data signals | 75 |
| A.3.3 | Speech and analogue signals | 75 |
| A.3.3.1 | Acoustic coupler description..... | 75 |
| A.3.3.2 | Calibration | 76 |
| Annex B (normative): Spectrum analyser specification | | 77 |
| Annex C (normative): Specification for measurement filter | | 78 |
| Annex D (informative): Bibliography | | 80 |
| History | | 81 |

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the ETSI standards One-step Approval Procedure.

The present document is part 1 of a multi-part deliverable covering Land Mobile Service; Radio equipment for analogue and/or digital communication (speech and/or data) and operating on narrow band channels and having an antenna connector, as identified below:

- Part 1: "Technical characteristics and methods of measurement";**
- Part 2: "Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive".

| Proposed national transposition dates | |
|--|---------------------------------|
| Date of latest announcement of this EN (doa): | 3 months after ETSI publication |
| Date of latest publication of new National Standard or endorsement of this EN (dop/e): | 6 months after doa |
| Date of withdrawal of any conflicting National Standard (dow): | 6 months after doa |

1 Scope

The present document covers the technical requirements for radio transmitters and receivers used in stations in the Private Mobile Radio (PMR) service. It applies to use in the land mobile service, operating on radio frequencies between 30 MHz and 3 GHz, with narrow channel separations (CSP) (less than 10 kHz) and intended for speech and/or data. It is the intention of the present document to cover any Channel Bandwidths (CBW) permitted by National Administrations for such systems, e.g. 6,25 kHz.

Table 1: Radiocommunications service frequency bands

| Radiocommunications service frequency bands | |
|---|---------------------|
| Transmit | 30 MHz to 3 000 MHz |
| Receive | 30 MHz to 3 000 MHz |

In the present document different requirements are given for the different radio frequency bands, environmental conditions and types of equipment where appropriate.

In the present document, data transmission systems are defined as systems which transmit and/or receive data and/or digitized voice. The equipment comprises a transmitter and associated encoder and modulator and/or a receiver and associated demodulator and decoder.

The present document covers equipment which may use constant envelope or non-constant envelope modulation.

The types of equipment covered by the present document are as follows:

- base station: equipment fitted with antenna connector;
- mobile station: equipment fitted with antenna connector.

Handportable stations:

- a) either fitted with an antenna connector; or
- b) without an external antenna connector but fitted with a permanent internal or a temporary internal 50 Ω RF connector which allows access to the transmitter output and the receiver input.

Handportable station equipment without an external or internal Radio Frequency (RF) connector and without the possibility of having a temporary internal 50 Ω RF connector is not covered by the present document.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

For online referenced documents, information sufficient to identify and locate the source shall be provided. Preferably, the primary source of the referenced document should be cited, in order to ensure traceability. Furthermore, the reference should, as far as possible, remain valid for the expected life of the document. The reference shall include the method of access to the referenced document and the full network address, with the same punctuation and use of upper case and lower case letters.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

- [1] ANSI C63.5-2004: "American National Standard for Electromagnetic Compatibility-Radiated Emission Measurements in Electromagnetic Interference (EMI) Control-Calibration of Antennas (9 kHz to 40 GHz)".
- [2] ITU-T Recommendation O.153: "Basic parameters for the measurement of error performance at bit rates below the primary rate".
- [3] IEC 60489-3: "Methods of measurement for radio equipment used in the mobile services. Part 3: Receivers for A3E or F3E emissions" Second edition (1988) appendix F.
- [4] ITU-R Recommendation SM.329-10 (2003): "Unwanted emissions in the spurious domain".
- [5] ITU-T Recommendation O.41 (1984): "Psophometer for use on telephone-type circuits".

2.2 Informative references

The following referenced documents are not essential to the use of the ETSI deliverable but they assist the user with regard to a particular subject area. For non-specific references, the latest version of the referenced document (including any amendments) applies.

- [6] ETSI TR 100 028 (V1.4.1) (all parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".
- [7] ETSI TR 102 273 (all parts) (V1.2.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

50 Ω : 50 ohm non-reactive impedance

adjacent and alternate channels:

- adjacent channels are those two channels offset from the wanted channel by the channel spacing;
- alternate channels are those two channels offset from the wanted channel by double the channel spacing

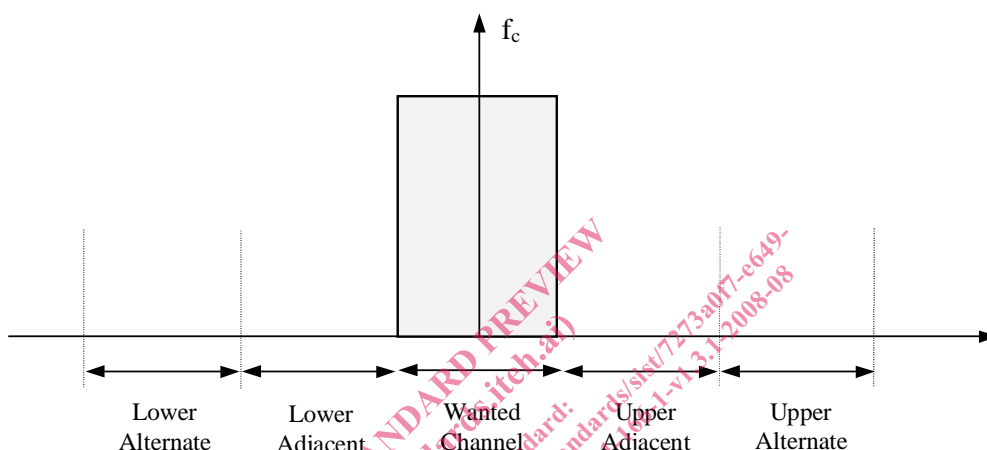


Figure 1: Adjacent and alternate channel definitions

audio frequency input socket: socket normally intended for connection to a microphone for the purpose of voice transmission

NOTE: In some cases, this socket could be expected to be used for the input of an audio sub-carrier, modulated to carry data, such as FFSK.

base station: equipment fitted with an antenna connector, for use with an external antenna and intended for use in a fixed location

bit: binary digit

block: smallest quantity of information that is sent over the radio channel

NOTE: A constant number of useful bits are always sent together with the corresponding redundancy bits.

conducted measurements: measurements which are made using direct 50 Ω connection to the equipment under test

data transmission systems: systems which transmit and/or receive data and/or digitized voice

facilities socket: any socket intended for purposes other than the transmission of voice

NOTE 1: The purpose of the socket and required input signals are specified by the manufacturer.

NOTE 2: The audio frequency input socket and the facilities socket may be the same physical socket in some implementations.

handportable station: equipment either fitted with an antenna connector or an integral antenna, or both, normally used on a stand-alone basis, to be carried on a person or held in the hand

integral antenna: antenna designed to be connected to the equipment without the use of a 50 Ω external connector and considered to be part of the equipment

NOTE: An integral antenna may be fitted internally or externally to the equipment.

Listen Before Transmit mode (LBT): monitoring mode in which the RF channel is checked for activity before transmitting

NOTE: Examples for LBT are transceivers or systems implementing squelch, CTCSS (Continuous Tone Control Squelch System), RSSI (Receiver Signal Strength Indicator), algorithms evaluating the status of the channel.

message: user data to be transferred in one or more packets in a session

mobile station: mobile equipment fitted with an antenna connector, for use with an external antenna, normally used in a vehicle or as a transportable station

necessary bandwidth: for a given class of emission, the width of the frequency band which is just sufficient to ensure the transmission of information at the rate and with the quality required under specified conditions

NOTE: See ITU-R Recommendation SM.329-10 [4].

packet: one block or a contiguous stream of blocks sent by one (logical) transmitter to one particular receiver or one particular group of receivers

radiated measurements: measurements which involve the absolute measurement of a radiated field

session: set of inter-related exchange of packets occupying one or several windows or part thereof (if applicable)

NOTE: A session corresponds to a complete interactive procedure for interchanging data between users, comprising initiation, data transmission and termination procedures. The session can be short (e.g. 2 packets), or long (e.g. one full page of text).

switching range: maximum frequency range, as specified by the manufacturer, over which the receiver or the transmitter can be operated within the alignment range without reprogramming or realignment

transmission (physical): one or several packets transmitted between power on and power off of a particular transmitter

window: set of inter-related transmissions which may be limited in time by an appropriate access protocol and corresponding occupation rules

3.2 Symbols

For the purposes of the present document, the following symbols apply:

| | |
|--------------|---|
| AR | Alignment Range |
| NOTE: | See clause 4.1. |
| dB | decibel |
| dBm | dB relative to 1 mW |
| dB μ V | dB relative to 1 μ V |
| f_c | Channel centre frequency |
| f_{I1} | 1 st intermediate frequency |
| f_{I2} | 2 nd intermediate frequency |
| f_{In} | n th intermediate frequency |
| f_{LO} | Local oscillator frequency |
| M1, M2, etc. | names of test signals defined in clause 6.1 |
| PR | rms power |
| PX | Maximum power |

| | |
|------------------|----------------------------------|
| V _{min} | Minimum extreme test voltage |
| V _{max} | Maximum extreme test voltage |
| T _{min} | Minimum extreme test temperature |
| T _{max} | Maximum extreme test temperature |
| λ | wavelength |

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

| | |
|-------|--|
| ac | alternating current |
| Bit | Binary digit |
| CBW | Channel BandWidth |
| CSP | Channel SeParation |
| CTCSS | Continuous Tone Control Squelch System |
| CW | Continuous Wave |
| DC | Direct Current |
| EMC | ElectroMagnetic Compatibility |
| emf | electromotive force |
| EUT | Equipment Under Test |
| FFSK | Fast Frequency Shift Keying |
| GMSK | Gaussian Minimum Shift Keying |
| IF | Intermediate Frequency |
| LBT | Listen Before Transmit |
| OATS | Open Area Test Site |
| PEP | Peak Envelope Power |
| PMR | Professional Mobile Radio |
| RF | Radio Frequency |
| rms | root mean square |
| RSSI | Receiver Signal Strength Indicator |
| SINAD | (signal + noise + distortion)/(noise + distortion) |
| sr | switching range |
| Tx | Transmitter |
| VSWR | Voltage Standing Wave Ratio |

4 General

4.1 Presentation of equipment for testing purposes

Each equipment to be tested submitted for testing shall fulfil the requirements of the present document on all frequencies over which it is intended to operate.

The provider or manufacturer shall declare the frequency ranges, the range of operating conditions and power requirements as applicable, to establish the appropriate test conditions.

Additionally, technical documentation and operating manuals, sufficient to make the test, shall be supplied.

4.1.1 Choice of model for testing

The provider or manufacturer shall provide one or more samples of the equipment, as appropriate for testing.

Stand alone equipment shall be complete with any ancillary equipment needed for testing.

If an equipment has several optional features, considered not to affect the RF parameters then the tests need only to be performed on the equipment configured with that combination of features considered to be the most complex.

Where practicable, equipment to be tested shall provide a 50 Ω connector for conducted RF power level measurements.

In the case of integral antenna equipment, if the equipment does not have a internal permanent 50 Ω connector then it is permissible to supply a second sample of the equipment with a temporary antenna connector fitted to facilitate testing.

The performance of the equipment to be tested shall be representative of the performance of the corresponding production model.

4.1.1.1 Auxiliary test equipment

All necessary test signal sources, setting up instructions and other product information shall accompany the equipment to be tested.

4.1.1.2 Declarations by the provider

The provider or manufacturer shall declare the necessary information of the equipment with respect to all technical requirements set by the present document.

In the case of hand portable equipment without a 50 Ω external antenna connector see clause 5.6.

5 Test conditions, power sources and ambient temperatures

5.1 Normal and extreme test conditions

Testing shall be performed under normal test conditions, and also, where stated, under extreme test conditions.

The test conditions and procedures shall be as specified in clauses 5.2 to 5.5.

5.2 Test power source

During testing the power source of the equipment shall be replaced by a test power source capable of producing normal and extreme test voltages as specified in clauses 5.3.2 and 5.4.2. The internal impedance of the test power source shall be low enough for its effect on the test results to be negligible. For the purpose of tests, the voltage of the power source shall be measured at the input terminals of the equipment.

For battery operated equipment the battery shall be removed and the test power source shall be applied as close to the battery terminals as practicable.

During tests of DC powered equipment the power source voltages shall be maintained within a tolerance of $< \pm 1$ % relative to the voltage at the beginning of each test. The value of this tolerance is critical for power measurements, using a smaller tolerance will provide better measurement uncertainty values.

5.3 Normal test conditions

5.3.1 Normal temperature and humidity

The normal temperature and humidity conditions for tests shall be any convenient combination of temperature and humidity within the following ranges:

- temperature: +15 $^{\circ}\text{C}$ to +35 $^{\circ}\text{C}$;
- relative humidity: 20 % to 75 %.

When it is impracticable to carry out the tests under these conditions, a note to this effect, stating the ambient temperature and relative humidity during the tests, shall be added to the test report.