

ETSI TS 101 220 V7.12.0 (2008-02)

Technical Specification

Smart Cards; ETSI numbering system for telecommunication application providers (Release 7)

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/00272228-b985-4fd6-b2b8-31bcb5ea6c8e/etsi-ts-101-220-v7.12.0-2008-02>



Reference

RTS/SCP-T070653r2

Keywords

GSM, ID, smart card, UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:
<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:
http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2008.
All rights reserved.

DECT™, PLUGTESTS™, UMTS™, TIPHON™, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	4
Foreword.....	4
1 Scope	5
2 References	5
2.1 Normative references	5
2.2 Informative references.....	6
3 Definitions and abbreviations.....	7
3.1 Definitions.....	7
3.2 Abbreviations	7
4 Structure of the Application Identifier (AID).....	8
4.1 Registered application provider Identifier (RID)	8
4.2 Proprietary application Identifier eXtension (PIX)	8
5 Use of the Application Identifier (AID)	9
6 Toolkit Application Reference (TAR)	9
7 Tag-Length-Value (TLV) data objects.....	10
7.1 TLV data object forms	10
7.1.1 COMPREHENSION-TLV tag coding.....	10
7.1.1.1 Single byte format.....	10
7.1.1.2 Three-byte format	11
7.1.1.3 Length encoding	11
7.2 Assigned TLV tag values	11
Annex A (normative): Allocated ETSI PIX numbers	16
Annex B (normative): Coding of the PIX for GSM and TETRA applications	17
Annex C (normative): Coding of the PIX for SIM toolkit API packages	18
Annex D (normative): Allocated TAR values	19
Annex E (normative): Allocated 3GPP PIX numbers	20
Annex F (normative): Coding of the PIX for 3G UICC applications	21
Annex G (normative): Coding of the PIX for 3G USIM Toolkit Applications	22
Annex H (informative): Tag allocation guidelines	23
Annex I (normative): Coding of the PIX for UICC toolkit API packages.....	24
Annex J (normative): Coding of the PIX for (U)SIM API for Java Card™ packages.....	25
Annex K (normative): Coding of the PIX for ISIM API for Java Card™ package.....	26
Annex L (Informative): Bibliography	27
Annex M (informative): Change history	28
History	31

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Smart Card Platform (SCP).

The contents of the present document are subject to continuing work within TC SCP and may change following formal TC SCP approval. If TC SCP modifies the contents of the present document, it will then be republished by ETSI with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 0 early working draft;
 - 1 presented to TC SCP for information;
 - 2 presented to TC SCP for approval;
 - 3 or greater indicates TC SCP approved document under change control.
- Y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document provides for the administration of shared name spaces in use by applications on the UICC including the managed allocation of identifiers from these name spaces.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- In the case of a reference to a TC SCP document, a non specific reference implicitly refers to the latest version of that document in the same Release as the present document.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

For online referenced documents, information sufficient to identify and locate the source shall be provided. Preferably, the primary source of the referenced document should be cited, in order to ensure traceability. Furthermore, the reference should, as far as possible, remain valid for the expected life of the document. The reference shall include the method of access to the referenced document and the full network address, with the same punctuation and use of upper case and lower case letters.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

- | | |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [1] | Void. |
| [2] | ITU-T Recommendation E.164: "The international public telecommunication numbering plan". |
| [3] | ISO/IEC 7816-4: "Identification cards - Integrated circuit cards - Part 4: Organization, security and commands for interchange". |
| [4] | ITU-T Recommendation E.118: "The international telecommunication charge card". |
| [5] | Void. |
| [6] | ETSI TS 151 011: "Digital cellular telecommunications system (Phase 2+); Specification of the Subscriber Identity Module - Mobile Equipment (SIM-ME) interface (3GPP TS 51.011)". |
| [7] | ETSI TS 101 267: "Digital cellular telecommunications system (Phase 2+); Specification of the SIM Application Toolkit (SAT) for the Subscriber Identity Module - Mobile Equipment (SIM-ME) interface (3GPP TS 11.14)". |

- [8] ETSI TS 143 019: "Digital cellular telecommunications system (Phase 2+); Subscriber Identity Module Application Programming Interface (SIM API) for Java Card; Stage 2 (3GPP TS 43.019)".
- [9] ETSI EN 300 812-3: "Terrestrial Trunked Radio (TETRA); Subscriber Identity Module to Mobile Equipment (SIM-ME) interface; Part 3: Integrated Circuit (IC); Physical, logical and TSIM application characteristics".
- [10] ETSI TS 131 101: "Universal Mobile Telecommunications System (UMTS); UICC-terminal interface; Physical and logical characteristics (3GPP TS 31.101)".
- [11] ETSI TS 131 102: "Universal Mobile Telecommunications System (UMTS); Characteristics of the Universal Subscriber Identity Module (USIM) application (3GPP TS 31.102)".
- [12] ETSI TS 131 111: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Universal Subscriber Identity Module (USIM) Application Toolkit (USAT) (3GPP TS 31.111)".
- [13] ETSI TS 131 114: "Universal Mobile Telecommunications System (UMTS); Universal Subscriber Identity Module Application Toolkit (USAT) interpreter protocol and administration (3GPP TS 31.114)".
- [14] ETSI TS 131 103: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Characteristics of the IP Multimedia Services Identity Module (ISIM) application (3GPP TS 31.103)".
- [15] ISO/IEC 8825-1: "Information technology - ASN.1 encoding rules: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER)".
- [16] ISO/IEC 7816-6: "Identification cards - Integrated circuit cards - Part 6: Interindustry data elements for interchange".
- [17] ETSI TS 102 241: "Smart cards; UICC Application Programming Interface (UICC API) for Java Card I (Release 7)".
- [18] ETSI TS 131 130: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); (U)SIM Application Programming Interface (API); (U)SIM API for Java Card (3GPP TS 31.130)".
- [19] ETSI TS 102 226: "Smart cards; Remote APDU structure for UICC based applications (Release 6)".
- [20] ETSI TS 131 116: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Remote APDU Structure for (Universal) Subscriber Identity Module (U)SIM Toolkit applications (3GPP TS 31.116)".
- [21] Void.
- [22] ETSI TS 102 474: "Digital Video Broadcasting (DVB); IP Datacast over DVB-H: Service Purchase and Protection".

NOTE: This reference is not yet publicly available.

- [23] ETSI TS 102 223: "Smart Cards; Card Application Toolkit (CAT)".
- [24] ETSI TS 131 133: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); IP Multimedia Services Identity Module (ISIM) Application Programming Interface (API); ISIM API for Java Card™ (3GPP TS 31.133)".
- [25] OMA-TS-Smartcard-Web-Server-V1-0 Available from <http://www.openmobilealliance.org>.

2.2 Informative references

- [26] ETSI TR 121 905: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Vocabulary for 3GPP Specifications (3GPP TR 21.905)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

Application Identifier (AID): data element, which identifies an application in a card

NOTE: An AID may contain a Registered application provider Identifier (RID). If it contains either a RID or an issuer identification number, then this identification is unambiguous (see ISO/IEC 7816-4 [3]).

Application Provider (AP): entity, which provides those components of an application on a card, required to perform the respective application

NOTE: See ISO/IEC 7816-4 [3].

Data object: structured data seen on an interface consisting of the concatenation of a mandatory tag field, a mandatory length field and an optional value field

tag: nominal datum that encodes the name of a data object

telecommunication IC card application: application described by an ETSI document

template: definition of a set of TLV data objects forming the value field of a constructed BER-TLV data object and a data object that realizes this definition

Toolkit Application Reference (TAR): data element, which identifies an application in the toolkit mechanisms (e.g. SMS Data Download)

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AID	Application Identifier
AP	Application Provider
API	Application Program Interface
BCD	Binary Coded Decimal
BER	Basic Encoding Rules
CR	Comprehension Required
DECT	Digital Enhanced Cordless Telecommunications
GSM	Global System for Mobile communication
IC	Integrated Circuit(s)
ICC	Integrated Circuit Card
ID	IDentifier
ISIM	IP Multimedia Services Identity Module
PIX	Proprietary application Identifier eXtension
RFU	Reserved for Future Use
RID	Registered application provider IDentifier
SIM	Subscriber Identity Module
TAR	Toolkit Application Reference
TETRA	TErrestrial Trunked RAdio
TLV	Tag-Length-Value
UPT	Universal Personal Telecommunications
URL	Uniform Resource Locator
USAT	USIM Application Toolkit
USIM	Universal Subscriber Identity Module
USSD	Unstructured Supplementary Services Data

4 Structure of the Application Identifier (AID)

In accordance with ISO/IEC 7816-4 [3], the AID has the following structure:

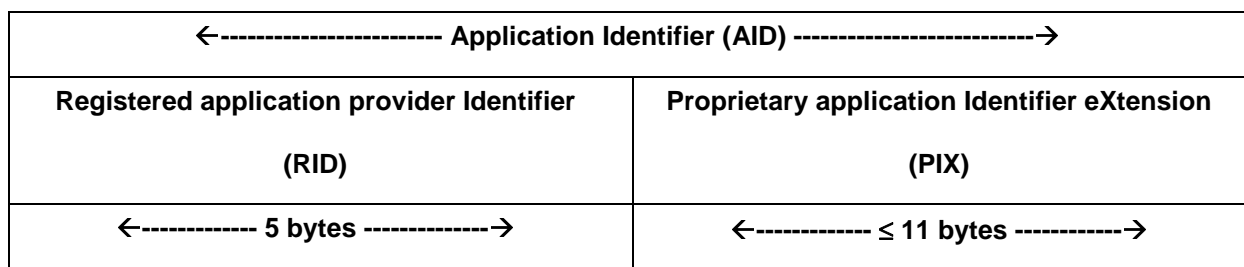


Figure 4.1: AID structure

The AID consists of a Registered application provider Identifier (RID) of 5 bytes and a Proprietary application Identifier eXtension (PIX) of up to 11 bytes.

4.1 Registered application provider Identifier (RID)

The RIDs dealt with in the present document, as registered by ISO/IEC according to ISO/IEC 7816-4 [3], are:

- 'A000000009' for ETSI;
- 'A000000087' for the 3GPP.

4.2 Proprietary application Identifier eXtension (PIX)

The PIX is used at the discretion of ETSI and can contain between 7 bytes and 11 bytes of information. The PIX is coded in hexadecimal. Hexadecimal digit 1 is the most significant digit.

Digits 1 to 4

Application code

Purpose: To be used for identification of the standardized ETSI or 3G card application (e.g. GSM, DECT, UPT, pre-paid application). Different versions of an application may have individual codings.

Management: Assigned by ETSI on request from the ETSI or 3G technical body responsible for the document in question.

Coding: Hexadecimal. The coding indicates the ETSI or 3G document that specifies the standardized ETSI or 3G card application and the PIX number. The correspondence between digits 1 to 4 and the ETSI or 3G document in question can be seen in a list maintained by the ETSI Secretariat (see annex A). Escape value '0000' is reserved for use by the ETSI Secretariat for proprietary ETSI or 3G applications.

Digits 5 to 8

Country code

Purpose: To indicate the country of the application provider of the ETSI or 3G standardized application.

Coding: According to ITU-T Recommendation E.164 [2]. The coding is right justified and padded with 'F' on the left.

NOTE 1: List of actual country codes is published by ITU.

Digits 9 to 14**Application provider code**

Purpose: Individual code for the application provider of the ETSI or 3G standardized application.

Coding: According to ITU-T Recommendation E.118 [4]. Hexadecimal. The coding is right justified and padded with 'F' on the left.

Digits 15 up to 22**Application provider field Optional. Up to 8 digits**

Purpose: The use of this field is entirely up to the application provider. It may, for instance, be used to indicate "local" versions, revisions, etc. of the ETSI or 3G standardized application. According to ISO/IEC 7816-4 [3], if the AID is 16 bytes long, then the value 'FF' for the least significant byte (digits 21 and 22) is reserved for future use.

Management: Application provider.

Coding: Hexadecimal.

NOTE 2: Digits 1 to 14 are assigned and registered by the ETSI Secretariat upon request by the responsible ETSI technical body.

5 Use of the Application Identifier (AID)

The use of the AID is specified in ISO/IEC 7816-4 [3].

6 Toolkit Application Reference (TAR)

The Toolkit Application Reference (TAR) is used to uniquely identify a second level application (e.g. Toolkit Application).

To be addressed, the Toolkit Application needs a first level application (e.g. GSM, USIM application) running.

A second level application may have several TAR values assigned.

The TAR values in the range '00 00 01' to 'AF FF FF' and 'C0 00 00' to 'FF FF FF' are under the responsibility of the first level application issuer.

The TAR values '00 00 00' and in the range 'B0 00 00' to 'BF FF FF' are reserved for allocation (by the ETSI Technical Body responsible for the present document) to generic second level application independent of the first level application issuer.

It is not mandatory for a second level application to have a TAR value assigned. If a TAR value is assigned to a second level application it is not mandatory for this value to be included in the AID. As a consequence, the AID coding of the second level application might not always comply with the present document (see annex B).

Table 6.1 lists the TAR values or range and their associated application categories.

Table 6.1: TAR and application categories

Toolkit application reference	Application category
'00 00 00' and 'B2 01 00'	Issuer security domain
'00 00 01' to 'AF FF FF'	Allocated by the 1 st level application issuer
'B0 00 00' to 'B0 FF FF'	Remote File Management (see annex D)
'B1 00 00' to 'B1 FF FF'	Payment application (see annex D)
'B2 00 00' to 'B2 00 FF'	USAT Interpreter Application (see annex D)
'B2 01 01' and 'B2 01 02'	Smart Card Web Server (see annex D)
'BF FF 00' to 'BF FF FF'	Proprietary Toolkit Application
'C0 00 00' to 'FF FF FF'	Allocated by the 1 st level application issuer

7 Tag-Length-Value (TLV) data objects

7.1 TLV data object forms

The encoding of data objects shall consist of three components that appear in the following order:

1. Tag (T).
2. Length (L).
3. Value (V).

The encoding of these components for each of the recognized forms of TLV is given in the following table.

Name of TLV	Encoding of tag field	Encoding of length field	Encoding of value field
BER-TLV	See ISO/IEC 8825-1 [15]	See clause 7.1.2	See ISO/IEC 8825-1 [15]
COMPACT-TLV	See ISO/IEC 7816-4 [3]	See ISO/IEC 7816-4 [3]	See ISO/IEC 7816-4 [3]
COMPREHENSION-TLV	See clause 7.1.1	See clause 7.1.2	See ISO/IEC 7816-4 [3]

7.1.1 COMPREHENSION-TLV tag coding

COMPREHENSION-TLV tags can be in one of two formats: single byte and three-byte format.

The value of the first byte identifies the format used.

First byte value	Format
'00'	Not used
'01' to '7E'	Single byte
'7F'	Three-byte
'80'	Reserved for future use
'81' to 'FE'	Single byte
'FF'	Not used

The same value in the different formats represents the same data object.

Unless otherwise stated, for COMPREHENSION-TLV it is the responsibility of the UICC application and the terminal to decide the value of the Comprehension Required (CR) flag for each data object in a given command.

Handling of the CR flag is the responsibility of the receiving entity.

CR	Value
Comprehension required	1
Comprehension not required	0

7.1.1.1 Single byte format

The tag is coded over one byte.

8	7	6	5	4	3	2	1
CR	Tag value						

CR: Comprehension required for this object.

7.1.1.2 Three-byte format

The tag is coded over three bytes.

Byte 1	Byte 2							Byte 3	
	8	7	6	5	4	3	2		1
Tag value format = '7F'	CR	Tag value							

Tag value format: Byte 1 equal to '7F' indicates that the tag is in the three-byte format.

- **CR:** Comprehension required for this object. Use and coding is the same as in single byte format.
- **Tag value:** Coded over 15 bits, with bit 7 of byte 2 as the most significant bit. Range is from '00 01' to '7F FF'.

7.1.1.3 Length encoding

The length is coded onto 1, 2, 3 or 4 bytes according to the following table:

Length	Byte 1	Byte 2	Byte 3	Byte 4
0 to 127	Length ('00' to '7F')	Not present	Not present	Not present
128 to 255	'81'	Length ('80' to 'FF')	Not present	Not present
256 to 65 535	'82'	Length ('01 00' to 'FF FF')		Not present
65 536 to 16 777 215	'83'	Length ('01 00 00' to 'FF FF FF')		

7.2 Assigned TLV tag values

The assigned tag values given in the following tables are the tag values used by specifications referencing the present document. All unassigned tag values are reserved for future use.

COMPACT-TLV tag	ATR data objects
'31'	Card Service Data
'73'	Card Capabilities

BER-TLV tag	Templates
'61'	Application Template
'62'	FCP Template
'7B'	Security Environment Template

BER-TLV tag	FCP template ('62')
'80'	File Size – Data
'81'	File Size – Total
'82'	File Descriptor
'83'	File Identifier
'84'	DF Name (AID)
'85'	Proprietary – Primitive
'88'	SFI Support
'8A'	Life Cycle Status
Security attribute data object	
'8B'	Security Attribute – Reference Format
'8C'	Security Attribute – Compact Format
'AB'	Security Attribute Template – Expanded Format
Proprietary template	
'A5'	Proprietary Template
PIN Status data objects	
'C6'	PIN Status data objects