
INTERNATIONAL STANDARD



5752

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Metal valves for use in flanged pipe systems — Face-to-face and centre-to-face dimensions

Appareils de robinetterie métalliques utilisés dans les tuyauteries à brides — Dimensions face-à-face et face-à-axe

First edition — 1979-02-15

UDC 621.646

Ref. No. ISO 5752-1979 (E)

Descriptors : piping, valves and fittings, industrial valves, valves, cocks, pipe flanges, nomenclature, connecting dimensions.

Price based on 11 pages

FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 5752 was developed by Technical Committee ISO/TC 153, *General purpose industrial valves*, and was circulated to the member bodies in August 1977.

It has been approved by the member bodies of the following countries :

Australia	Italy	Spain
Austria	Japan	Sweden
Canada	Mexico	Switzerland
Denmark	Netherlands	United Kingdom
Finland	Norway	U.S.A.
Germany, F. R.	Poland	
India	Romania	

The member bodies of the following countries expressed disapproval of the document on technical grounds :

Belgium
France
South Africa, Rep. of
U.S.S.R.

Metal valves for use in flanged pipe systems — Face-to-face and centre-to-face dimensions

0 INTRODUCTION

The object of this International Standard is the establishment of face-to-face and centre-to-face dimensions for metal valves to permit a degree of dimensional interchangeability. It is intended for use in preparing product standards for industrial valves.

The pressure/temperature ratings for the different types of valves are those to be specified in the valve product standards for the types of valve and materials used.

Where dimensions from inch series of valves have been converted into millimetres, the exact values obtained have been rounded to the whole millimetre below when the decimal value obtained in conversion has been less than 0,5 mm, and to the whole millimetre above when the decimal value obtained in conversion has been equal to or greater than 0,5 mm.

1 SCOPE AND FIELD OF APPLICATION

1.1 This International Standard specifies the basic series of face-to-face or centre-to-face dimensions for two-way metal valves used in flanged pipe systems. Each basic series of face-to-face or centre-to-face dimensions may be used as required with flanges of mating dimensions conforming to ISO 2084 or ISO 2229.

1.2 The range of pressure ratings, in PN values, is

1 — 1,6 — 2,5 — 4 — 6 — 10 — 16 — 25 and 40
and classes 125 — 150 — 250 — 300 and 600.

1.3 The range of nominal sizes, in DN values, is

10 — 15 — 20 — 25 — 32 — 40 — 50 — 65 — 80 — 100 —
125 — 150 — 200 — 250 — 300 — 350 — 400 — 450 —
500 — 600 — 700 — 800 — 900 — 1 000 — 1 200 —
1 400 — 1 600 — 1 800 and 2 000.

2 DEFINITIONS

2.1 nominal size (DN): A numerical designation of size which is common to all components in a piping system other than components designated by outside diameters. It is a convenient round number for reference purposes and it is normally only loosely related to manufacturing dimensions.

It is designated by the letters DN, followed by a number.

2.2 nominal pressure: The nominal pressures in this International Standard follow one of two systems, the PN rating system or the class rating system.

2.3 face-to-face dimension (for straight pattern valves): The distance, expressed in millimetres, between the two planes perpendicular to the valve axis located at the extremities of the body end ports or as may be specified in the relevant valve products standards.

The face-to-face dimension for butterfly valves is the distance between the extremities of the valve in the installed conditions.

2.4 centre-to-face dimension (for angle pattern valves): The distance, expressed in millimetres, between the plane located at the extremity of either body end port and perpendicular to its axis and the other body end port axis.

3 DIMENSIONS AND TOLERANCES


The basic series of face-to-face and centre-to-face dimensions, expressed in millimetres, are given in table 1. The table is a summary of the dimensions in tables 2 to 10 giving the origin of each series, and should be referred to when consideration is given to the standardization of valve types not presently covered by this International Standard. Each particular column does not necessarily include all the valves of the relevant basic series.

The face-to-face or centre-to-face dimensions as appropriate for the types of valves included in this International Standard, shall be in accordance with table 2 for the isomorphic series and tables 3 to 10 for the isobaric series, and the tolerances shall be in accordance with table 11.


4 TERMINOLOGY*

4.1 Gate valves

4.1.1 Wedge gate valve




4.1.2 Parallel slide gate valve




4.2 Butterfly valves

4.2.1 Wafer butterfly valve




4.2.2 Double-flanged butterfly valve




4.3 Plug and ball valves

4.3.1 Conical or cylindrical plug valve




4.3.2 Ball valve




4.4 Diaphragm valves

4.4.1 Diaphragm valve




4.4.2 Non-return diaphragm valve

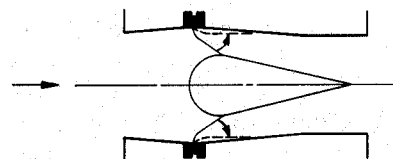


* The illustrations are intended to be a diagrammatic only and should not be used as symbols. They do not assume the principle or the construction details.

4.5 Globe valves


4.5.1 Globe valve



4.5.2 Oblique type of globe valve




4.5.3 Globe type angle valve




4.6 Check (non-return) valves

4.6.1 Lift type check valve



4.6.2 Swing type check valve



4.6.3 Lift type angle check valve




TABLE 1 — Face-to-face and centre-to-face dimensions — Basic series

Nominal size (DN)	Basic series																											
	1	2	3	4	5	6	7	8*	9*	10	11*	12	13	14	15	16	17	18	19	20	21	22	23	24*	25			
	DIN 3202/F1	DIN 3203/F	ANSI B16.10	ANSI B16.10	ANSI B16.10	ANSI B16.10	BS 5156	DIN 3202/F32	DIN 3202/F33	ANSI B16.10	ANSI B16.10	ANSI B16.10	BS 3952	DIN 3202/F4	DIN 3202/F5	API 609	BS 3952	API 600	BS 5154	ANSI B16.10	API 609	BS 3952	ANSI B16.10	22	23	24*	MSS SP 67	
10	130	210	102	—	—	—	108	85	105	—	—	102	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
15	130	210	108	140	165	108	108	90	105	108	57	108	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
20	150	230	117	152	190	117	117	95	115	117	64	117	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
25	160	230	127	165	216	127	127	100	115	127	70	127	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
32	180	260	140	178	229	146	105	130	130	140	76	140	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
40	200	260	165	190	241	159	115	130	150	165	82	165	106	140	240	33	190	120	190	33	241	33	241	33	241	33	241	33
50	230	300	178	216	292	190	125	150	203	203	102	203	108	150	250	43	216	135	216	43	267	43	267	43	267	43	267	43
65	290	340	190	241	330	216	145	170	216	216	108	222	112	170	270	46	241	165	241	46	292	46	292	46	292	46	292	46
80	310	380	203	283	356	254	155	190	241	241	121	241	114	180	280	64	283	185	283	46	318	46	318	46	318	46	318	46
100	350	430	229	305	432	305	175	215	292	292	146	305	127	190	300	64	305	305	305	52	356	52	356	52	356	52	356	52
125	400	500	254	381	508	356	200	250	356	356	178	356	140	200	325	70	381	381	381	56	400	56	400	56	400	56	400	56
150	480	550	267	403	559	406	225	275	406	406	203	394	140	210	350	76	403	403	403	56	444	56	444	56	444	56	444	56
200	600	650	292	419	660	521	275	325	495	495	248	457	152	230	400	89	502	419	419	60	559	60	559	60	559	60	559	60
250	730	775	330	457	787	635	325	325	622	622	311	533	165	250	450	114	568	457	457	68	622	68	622	68	622	68	622	68
300	850	900	356	502	838	749	375	375	698	698	350	610	178	270	500	114	648	502	502	78	711	78	711	78	711	78	711	78
350	980	1 025	381	762	889	749	425	425	787	787	394	686	190	290	550	127	762	572	572	78	838	78	838	78	838	78	838	78
400	1 100	1 150	406	838	991	749	475	475	914	914	457	762	216	310	600	140	838	610	610	102	864	102	864	102	864	102	864	102
450	1 200	1 275	432	914	1 092	749	500	500	978	978	483	864	222	330	650	152	914	660	660	114	978	114	978	114	978	114	978	114
500	1 250	1 400	457	991	1 194	749	500	500	978	978	483	914	229	350	700	152	991	711	711	127	1 016	127	1 016	127	1 016	127	1 016	127
550	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
600	1 450	1 650	508	1 143	1 397	749	500	500	1 295	1 295	1 067	267	390	800	178	1 143	787	787	154	1 346	154	1 346	154	1 346	154	1 346	154	1 346
650	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
700	1 650	—	610	—	—	—	—	—	1 448	1 448	292	430	900	229	—	—	—	—	—	—	—	—	—	—	—	—	—	—
750	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
800	1 850	—	660	—	—	—	—	—	—	—	318	470	1 000	241	—	—	—	—	—	—	—	—	—	—	—	—	—	—
900	2 050	—	711	—	—	—	—	—	—	—	330	510	1 100	241	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1 000	2 250	—	811	—	—	—	—	—	1 956	1 956	410	550	1 200	300	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1 200	—	—	—	—	—	—	—	—	—	—	470	630	1 200	350	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1 400	—	—	—	—	—	—	—	—	—	—	530	710	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1 600	—	—	—	—	—	—	—	—	—	—	600	790	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1 800	—	—	—	—	—	—	—	—	—	—	670	870	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2 000	—	—	—	—	—	—	—	—	—	—	760	950	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

* Centre-to-face dimensions for angle valves.

TABLE 2 – Gate valves, isomorphic series

Nominal size (DN)	Face-to-face dimensions	Maximum working pressure at 20 °C for lamellar graphite cast iron bar ¹⁾
40	140	10
50	150	
65	170	
80	180	
100	190	
125	200	
150	210	
200	230	6
250	250	
300	270	
350	290	4
400	310	
450	330	
500	350	
600	390	2,5
700	430	
800	470	1,6
900	510	1
1 000	550	
Basic series	14	—

NOTE — "Isomorphic" is the name of a series of flow pressure gate valves of a specified shape, having, for each nominal size the minimum wall thickness meeting the foundry or manufacturing requirements (in contrast to "isobar series", i.e. having the same maximum operating pressure at a temperature of 20 °C). Since the maximum permissible pressure at a temperature of 20 °C in such a series decreases as the nominal size increases, the gate valves may only be used at the maximum permissible pressures at a temperature of 20 °C given in the above table, subject to the material of which the body and the bonnet is formed.

1) 1 bar = 10⁵ Pa

TABLE 3 – Gate valves

Nominal size (DN)	Face-to-face dimensions					
	PN 10/16 Class 125/150		PN 25/40 Class 300	Alternative for PN 25 only	Class 250 cast iron	Class 600
	Short	Long				
10	102					
15	108		140		140	165
20	117		152		152	190
25	127		165		165	216
32	140		178		178	229
40	165	240	190	240	190	241
50	178	250	216	250	216	292
65	190	270	241	270	241	330
80	203	280	283	280	283	356
100	229	300	305	300	305	432
125	254	325	381	325	381	508
150	267	350	403	350	403	559
200	292	400	419	400	419	660
250	330	450	457	450	457	787
300	356	500	502	500	502	838
350	381	550	762	550	572	889
400	406	600	838	600	610	991
450	432	650	914	650	660	1 092
500	457	700	991	700	711	1 194
600	508	800	1 143	800	787	1 397
700	610	900				
800	660	1 000				
900	711	1 100				
1 000	811	1 200				
Basic series	3	15	4	15	19	5

TABLE 4 – Double-flanged butterfly valves and double-flanged butterfly check valves

Nominal size (DN)	Face-to-face dimensions	
	≤ PN 16 and Class 125/150	≤ PN 25 and Class 125/150
	short series	long series
40	106	140
50	108	150
65	112	170
80	114	180
100	127	190
125	140	200
150	140	210
200	152	230
250	165	250
300	178	270
350	190	290
400	216	310
450	222	330
500	229	350
600	267	390
700	292	430
800	318	470
900	330	510
1 000	410	550
1 200	470	630
1 400	530	710
1 600	600	790
1 800	670	870
2 000	760	950
Basic series	13	14

NOTE -- ≤ means equal to or less than.

TABLE 5 – Wafer butterfly valves and wafer butterfly check valves

Nominal size (DN)	Face-to-face dimensions		
	≤ PN 16 and Class 125/150		
	short	medium	long
40	33		33
50	43		43
65	46		46
80	46	49	64
100	52	56	64
125	56	64	70
150	56	70	76
200	60	71	89
250	68	76	114
300	78	83	114
350	78	92	127
400	102	102	140
450	114	114	152
500	127	127	152
600	154	154	178
700	165		229
800	190		241
900	203		241
1 000	216		300
1 200	254		350
Basic series	20	25	16

NOTE -- ≤ means equal to or less than.

TABLE 6 – Plug valves and ball valves

Nominal size (DN)	Face-to-face dimensions					
	PN 10/16 Class 125/150			PN 25/40 Class 250/300		Class 600
	short*	medium	long	short	long	
10	102	102	130		130	
15	108	108	130	140	130	165
20	117	117	150	152	150	190
25	127	127	160	165	160	216
32	140	140	180	178	180	229
40	165	165	200	190	200	241
50	178	203	230	216	230	292
65	190	222	290	241	290	330
80	203	241	310	283	310	356
100	229	305	350	305	350	432
125	254	356	400	381	400	508
150	267	394	480	403	480	559
200	292	457	600	419**	600	660
250	330	533	730	457**	730	787
300	356	610	850	502**	850	838
350	381	686	980	762	980	889
400	406	762	1 100	838	1 100	991
450	432	864	1 200	914	1 200	1 092
500	457	914	1 250	991	1 250	1 194
600	508	1 067	1 450	1 143	1 450	1 397
Basic series	3	12	1	4	1	5

* Not applicable :

- a) above DN 40 to top entry full bore ball valves;
- b) above DN 300 to plug and full bore ball valves.

** For full bore ball valves use :

- 502 (DN 200)
- 568 (DN 250)
- 648 (DN 300).