
Draft ETSI EN 301 908-15 V4.1.1 (2009-04)

Harmonized European Standard (Telecommunications series)

Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks; Part 15: Harmonized EN for IMT-2000, Evolved Universal Terrestrial Radio Access (E-UTRA) (FDD Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive

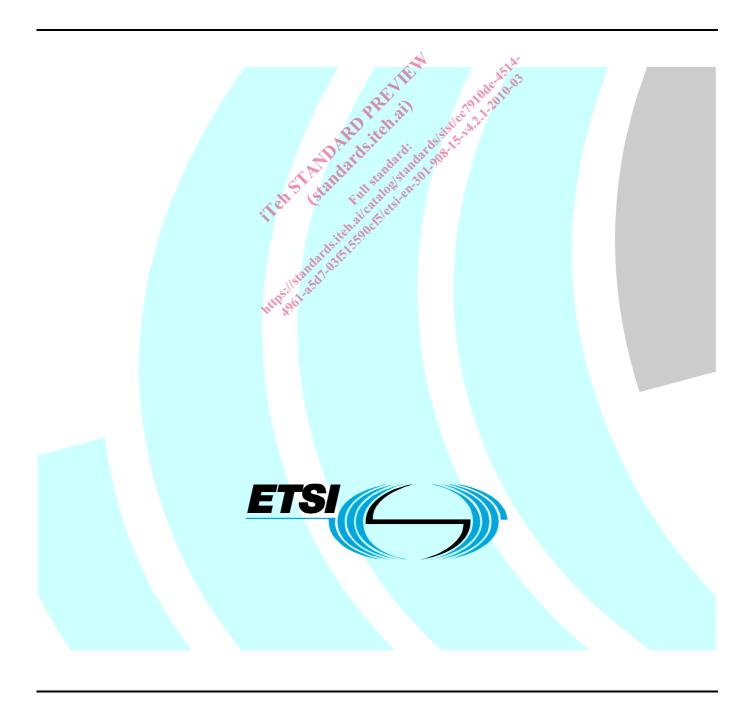

Reference

DEN/ERM-TFES-002-15

Keywords

3G, 3GPP, cellular, digital, IMT-2000, mobile, radio, regulation, repeater, UMTS, WCDMA

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2009. All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP[™] is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **LTE**[™] is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intelle	ectual Property Rights	5
Forew	vord	5
Introd	luction	6
1	Scope	7
2	References	7
2.1	Normative references	
2.1	Informative references	
3	Definitions, symbols and abbreviations	9
3.1	Definitions	9
3.2	Symbols	10
3.3	Abbreviations	10
4	Technical requirements specifications	10
 4.1	Environmental profile	10
4.2	Conformance requirements	
4.2.1		1.1
4.2.1	Operating hand insuranted emissions	11 11
4.2.2 4.2.2.1	Operating band unwanted emissions	11 11
	Definition	11 11
4.2.2.2		11
4.2.2.2	2.1 General operating band unwanted emissions.	12
4.2.2.2	2.2 Protection of the BS receiver in the operating band	13
4.2.2.3	3 Conformance	14
4.2.3	Spurious emissions	14
4.2.3.1	Definition	14
4.2.3.2	AON	14
4.2.3.2	2.1 Spurious emissions	14
4.2.3.2	2.2 Co-existence with other systems in the same geographical area	14
4.2.3.3	Conformance	16
4.2.4	Maximum output power	16
4.2.4.1	Definition	16
4.2.4.2	Limit	16
4.2.4.3	3 Conformance	16
4.2.5	Input intermodulation	
4.2.5.1	Definition	16
4.2.5.2		
4.2.5.2	2.1 General input intermodulation requirement	17
4.2.5.2	2.2 Co-existence with other systems	18
4.2.5.3	3 Conformance	18
4.2.6	Out of band gain	18
4.2.6.1	Definition	18
4.2.6.2	Limits	19
4.2.6.3	Conformance	19
4.2.7	Adjacent Channel Rejection Ratio	19
4.2.7.1	Definition	19
4.2.7.2	Limit	19
4.2.7.2	2.1 ACRR	19
4.2.7.2		
4.2.7.3		
4.2.8	Output intermodulation	
4.2.8.1	1	
4.2.8.2		
4.2.8.3		
	Testing for compliance with technical requirements	
5.1	Environmental conditions for testing	

5.2	Interpretation of the	measurement results	21
5.3		uites	
5.3.1	Operating band u	inwanted emissions	22
5.3.1.1	Initial conditi	ons	22
5.3.1.2	Procedures		22
5.3.2	Spurious emissio	ns	23
5.3.2.1	Initial conditi	ons	23
5.3.2.2	Procedures		23
5.3.3	Maximum output	t power	24
5.3.3.1	Initial conditi	ons	24
5.3.3.2	Procedures		24
5.3.4	Input intermodula	ation	25
5.3.4.1	Initial conditi	ons	25
5.3.4.2	Procedures		25
5.3.5	Out of band gain		25
5.3.5.1	Initial conditi	ons	25
5.3.5.2			
5.3.6		el Rejection Ratio	
5.3.6.1		ons	
5.3.6.2			
5.3.7		ulation	
5.3.7.1		ons	
5.3.7.2	Procedures		27
Annov	A (normative):	HS Requirements and conformance Test specifications Table	
Aimex	A (normative):	(IIC DTT)	20
		(IIS-K11)	⊿o
Annex 1	B (normative):	(HS-RTT)	30
B.1 P	ower supply	Repeater configurations	30
B.2 P	ower supply options	A Tudat danidani dani dani	30
В.3 С	'ombining of Repeate	are all Star Kill talogicars	30
D .5 C	comoning of Repeat	ilegie	
Annex	C (informative):	Environmental profile specification	31
Annex 1	D (informative):	The EN title in the official languages	32
Annex 1	E (informative):	Bibliography	33
I U - U I Y			

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Public Enquiry phase of the ETSI standards Two-step Approval Procedure.

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC [i.1] (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [i.2] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

Technical specifications relevant to Directive 1999/5/EC [i,2] are given in annex A.

The present document is part 15 of a multi-part deliverable covering the Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks, as identified below:

- Part 1: "Harmonized EN for IMT-2000, introduction and common requirements, covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 2: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD and E-UTRA FDD) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 3: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD and E-UTRA FDD) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 4: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) and Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 5: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) and Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 6: "Harmonized EN for IMT-2000, CDMA TDD (UTRA TDD and E-UTRA TDD) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 7: "Harmonized EN for IMT-2000, CDMA TDD (UTRA TDD and E-UTRA TDD) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 8: "Harmonized EN for IMT-2000, TDMA Single-Carrier (UWC 136) (UE) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 9: "Harmonized EN for IMT-2000, TDMA Single-Carrier (UWC 136) (BS) covering essential requirements of article 3.2 of the R&TTE Directive";

- Part 10: "Harmonized EN for IMT-2000, FDMA/TDMA (DECT) covering essential requirements of article 3.2 of the R&TTE Directive";
- Part 11: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD and E-UTRA FDD) (Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 12: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) (Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 13: "Harmonized EN for IMT-2000, Evolved Universal Terrestrial Radio Access (E-UTRA) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 14: "Harmonized EN for IMT-2000, Evolved Universal Terrestrial Radio Access (E-UTRA) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 15: "Harmonized EN for IMT-2000, Evolved Universal Terrestrial Radio Access (E-UTRA) (FDD Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 16: "Harmonized EN for IMT-2000, Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (UE) covering the essential requirements of article 3.2 of the R&TTE Directive";
- Part 17: "Harmonized EN for IMT-2000, Evolved CDMA Multi-Carrier Ultra Mobile Broadband (UMB) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive".

Proposed national transposition dates				
Date of latest announcement of this EN (doa):	3 months after ETSI publication			
Date of latest publication of new National Standard				
or endorsement of this EN (dop/e):	6 months after doa			
Date of withdrawal of any conflicting National Standard (dow).	18 months after doa			

Introduction

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the R&TTE Directive. The modular structure is shown in EG 201 399 [i.3].

1 Scope

The present document applies to the following radio equipment types:

• Repeaters for Evolved Universal Terrestrial Radio Access (E-UTRA) (FDD).

These radio equipment types are capable of operating in all or any part of the operating bands given in table 1-1.

E-UTRA FDD Direction of transmission E-UTRA Repeater operating bands band Downlink 2 110 MHz to 2 170 MHz 1 Uplink 1 920 MHz to 1 980 MHz 3 Downlink 1 805 MHz to 1 880 MHz Uplink 1 710 MHz to 1 785 MHz 7 Downlink 2 620 MHz to 2 690 MHz Uplink 2 500 MHz to 2 570 MHz 8 Downlink 925 MHz to 960 MHz 880 MHz to 915 MHz Uplink

Table 1-1: E-UTRA Repeater operating bands

The present document covers requirements for E-UTRA Repeaters for Release 8.

The present document is intended to cover the provisions of Directive 1999/5/EC [i,2] (R&TTE Directive), Article 3.2, which states that "..... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [i.2] may apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site http://www.newapproach.org.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at http://docbox.etsi.org/Reference.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

- [1] ETSI EN 301 908-1 (V4.1.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks; Part 1: Harmonized EN for IMT-2000, introduction and common requirements, covering the essential requirements of article 3.2 of the R&TTE Directive".
- [2] ETSI TS 136 143 (V8.0.0): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Repeater conformance testing (3GPP TS 36.143 version 8.0.0 Release 8)".
- [3] ETSI TR 100 028 (all parts) (V1.4.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".
- [4] ITU-R Recommendation SM.329-10 (2003): "Unwanted emissions in the spurious domain".
- [5] IEC 60068-2-1 (2007): "Environmental testing Part 2-1: Tests Test A: Cold".
- [6] IEC 60068-2-2 (2007): "Environmental testing Part 2-2: Tests Test B: Dry heat".
- [7] ETSI EN 301 908-11 (V4.1.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks; Part 11: Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD and E-UTRA FDD) (Repeaters) covering the essential requirements of article 3.2 of the R&TTE Directive".
- [8] ETSI TS 136 141 (V8.1.0): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) conformance testing (3GPP TS 36.141 version 8.1.0 Release 8)".
- [9] ETSI TS 125 141 (V8.6.0): "Universal Mobile Telecommunications System (UMTS); Base Station (BS) conformance testing (FDD) (3GPP TS 25.141 version 8.6.0 Release 8)".

2.2 Informative references

The following referenced documents are not essential to the use of the present document but they assist the user with regard to a particular subject area. For non-specific references, the latest version of the referenced document (including any amendments) applies.

- [i.1] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- [i.2] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [i.3] ETSI EG 201 399: "Electromagnetic compatibility and Radio spectrum Matters (ERM); A guide to the production of candidate Harmonized Standards for application under the R&TTE Directive".
- [i.4] ETSI TR 102 215 (V1.3.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Recommended approach, and possible limits for measurement uncertainty for the measurement of radiated electromagnetic fields above 1 GHz".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

carrier: modulated waveform conveying the E-UTRA or UTRA (WCDMA) physical channels

channel bandwidth: RF bandwidth supporting a single E-UTRA RF carrier with the transmission bandwidth configured in the uplink or downlink of a cell

NOTE: The channel bandwidth is measured in MHz and is used as a reference for transmitter and receiver RF requirements.

channel edge: lowest and highest frequency of the E-UTRA carrier, separated by the channel bandwidth

donor coupling loss: coupling loss between the repeater and the donor base station

downlink: signal path where base station transmits and mobile receives

downlink operating band: part of the operating band designated for downlink

operating band: frequency range in which E-UTRA FDD operates, that is defined with a specific set of technical requirements

NOTE 1: The operating band(s) for an E-UTRA Repeater is declared by the manufacturer according to the designations in clause 1, table 1-1.

NOTE 2: Unless specified, operating band refers to the uplink operating band and downlink operating band.

output power, Pout: mean power of one carrier at maximum repeater gain delivered to a load with resistance equal to the nominal load impedance of the transmitter

pass band: repeater can have one or several pass bands

NOTE: The pass band is the frequency range that the repeater operates in with operational configuration. This frequency range can correspond to one or several consecutive nominal channels. If they are not consecutive each subset of channels shall be considered as an individual pass band.

rated output power: rated output power of the repeater is the mean power level per carrier that the manufacturer has declared to be available at the antenna connector

repeater: device that receives, amplifies and transmits the radiated or conducted RF carrier both in the downlink direction (from the base station to the mobile area) and in the uplink direction (from the mobile to the base station)

transmission bandwidth: bandwidth of an instantaneous transmission from a UE or BS, measured in Resource Block units

transmission bandwidth configuration: highest transmission bandwidth allowed for uplink or downlink in a given channel bandwidth, measured in Resource Block units

uplink: signal path where mobile transmits and base station receives

uplink operating band: part of the operating band designated for uplink

3.2 **Symbols**

For the purposes of the present document, the following symbols apply:

 $BW_{Channel}$ Channel bandwidth

Transmission bandwidth configuration, expressed in MHz, where $BW_{Config} = N_{RB} \times 180 \text{ kHz}$ in BW_{Config}

the uplink and BW_{Config} = 15 kHz + $N_{RB} \times 180$ kHz in the downlink

 $\mathrm{BW}_{\mathrm{Meas}}$ Measurement bandwidth

Bandwidth of the repeater input signal filling the repeater pass band BW_{Signal}

The lowest frequency of the downlink operating band F_{DL_low} The highest frequency of the downlink operating band F_{DL_high} The lowest frequency of the uplink operating band F_{UL low} The highest frequency of the uplink operating band F_{UL high}

f_offset_PB The distance from the channel edge frequency of the first or last channel in the pass band

Downlink EARFCN N_{DL}

Offset used for calculating downlink EARFCN N_{Offs-DL} Offset used for calculating uplink EARFCN N_{Offs-UL}

Transmission bandwidth configuration, expressed in units of resource blocks N_{RB}

 N_{UL} Uplink EARFCN Pmax Maximum output power

Pout Output power

3.3 **Abbreviations**

For the purposes of the present document, the following abbreviations apply:

Adjacent Channel Rejection Ratio **ACRR**

BS **Base Station** BWBandwidth Continuous Wave CW

E-UTRA Absolute Radio Frequency Channel Number **EARFCN**

E-TM E-UTRA Test Model E-UTRA **Evolved UTRA**

Frequency Division Duplex **FDD**

PB Pass Band RF Radio Frequency

Root Mean Square (value) RMS **RRC Root Raised Cosine UMB** Ultra Mobile Broadband **UTRA UMTS** Terrestrial Radio Access

Technical requirements specifications 4

Environmental profile 4.1

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the supplier. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the declared operational environmental profile.

For guidance on how a supplier can declare the environmental profile, see annex C.

4.2 Conformance requirements

The requirements in the present document are based on the assumption that the operating band (e.g. bands 1, 3, 7 and 8) is shared between systems of the IMT-2000 family (for band 3 and 8 also GSM) or systems having compatible characteristics.

4.2.1 Introduction

To meet the essential requirement under article 3.2 of Directive 1999/5/EC [i.2] (R&TTE Directive) for IMT-2000 Repeaters five essential parameters in addition to those in EN 301 908-1 [1] have been identified. Table 4.2.1-1 provides a cross reference between these five essential parameters and the corresponding seven technical requirements for equipment within the scope of the present document.

Table 4.2.1-1: Cross references

Essential parameter	Corresponding technical requirements
Spectrum emissions mask	4.2.2 Operating band unwanted emissions
Conducted spurious emissions from the antenna connector	4.2.3 Spurious emissions
Accuracy of maximum output power	4.2.4 Maximum output power
	4.2.5 Input intermodulation
Receiver immunity	4.2.6 Out of band gain
	4.2.7 Adjacent Channel Rejection Ratio
Intermodulation attenuation of the output	4.2.8 Output intermodulation

4.2.2 Operating band unwanted emissions

4.2.2.1 Definition

Unwanted emissions consist of out-of-band emissions and spurious emissions (ITU-R Recommendation SM.329-10 [4]). Out of band emissions are unwanted emissions immediately outside the pass band bandwidth resulting from the modulation process and non-linearity in the transmitter, but excluding spurious emissions. Spurious emissions are emissions which are caused by unwanted transmitter effects such as harmonics emission, parasitic emission, intermodulation products and frequency conversion products, but exclude out of band emissions.

The out-of-band emissions requirement for repeater is specified both in terms operating band unwanted emissions and protection of the BS receiver in the uplink operating band. The operating band unwanted emissions define all unwanted emissions in the repeater operating band plus the frequency ranges 10 MHz above and 10 MHz below that band. Unwanted emissions outside of this frequency range are limited by a spurious emissions requirement.

4.2.2.2 Limit

Emissions shall not exceed the maximum levels specified in the tables below, where:

- Δf is the separation between the channel edge frequency and the nominal -3 dB point of the measuring filter closest to the carrier frequency.
- BW_{Meas} is the measurement bandwidth.
- BW_{Signal} is the bandwidth of the repeater input signal filling the repeater pass band.
- f_offset is the separation between the channel edge frequency and the centre of the measuring filter.
- f_offset_{max} is the offset to the frequency 10 MHz outside the repeater operating band.
- Δf_{max} is equal to f_offset_{max} minus half of the bandwidth of the measuring filter.

Unless otherwise stated, all requirements are measured as mean power (RMS).