
**Micrographics — Alphanumeric computer
output microforms — Quality control**

**Part 2:
Method**

*Micrographie — Microformes COM alphanumériques — Contrôle de
la qualité*
(Partie 2: Méthode)

<https://standards.iteh.ai/catalog/standards/sist/0a8a66ae-0842-4b09-9e21-6cff03476267/iso-8514-2-2000>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8514-2:2000

<https://standards.iteh.ai/catalog/standards/sist/0a8a66ae-0842-4b09-9e21-6cff03476267/iso-8514-2-2000>

© ISO 2000

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 734 10 79
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 8514 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 8514-2 was prepared by Technical Committee ISO/TC 171, *Document imaging applications*, Subcommittee SC 1, *Quality*.

This second edition cancels and replaces the first edition (ISO 8514-2:1992) which has been technically revised.

ISO 8514 consists of the following parts, under the general title *Micrographics — Alphanumeric computer output microforms — Quality control*:

- *Part 1: Characteristics of the test slide and test data*
- *Part 2: Method*

Annex A of this part of ISO 8514 is for information only.

Introduction

The use of alphanumeric computer output microforms (alphanumeric COM) for the storage of information requires valid, reliable methods by which the quality of the images can be measured. This is necessary to achieve consistent usable output. Of primary importance in the production of microforms containing alphanumeric information is the legibility of the information presented to the user. This is true whether the microform used is the original (first generation) or a duplicate.

ISO 8514 specifies a method for measuring the quality of computer output microforms (COM) and specifies a test form slide and test data to be used for applying this method. It applies to microforms containing variable data produced using a cathode-ray tube, light-emitting diodes or a laser, and fixed data such as that contained on a form slide, with effective reduction ratios of 1:24 through 1:48, in accordance with ISO 9923. This International Standard applies only to COM recorders that use a physical form slide.

This International Standard describes various systems and equipment to establish test guidelines whereby the user can establish and maintain a given level of performance using the minimum of sophisticated equipment.

The method requires a test form slide and test data generated from the COM image generator.

Part 1 of this International Standard specifies the characteristics of the test slide and of the test data used for applying this method.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8514-2:2000

<https://standards.iteh.ai/catalog/standards/sist/0a8a66ae-0842-4b09-9e21-6cff03476267/iso-8514-2-2000>

Micrographics — Alphanumeric computer output microforms — Quality control —

Part 2: Method

1 Scope

This part of ISO 8514 describes a method for measuring the output quality of alphanumeric COM recorders that use a physical form slide. It also provides a means for establishing the optimum intensity (exposure) settings of the image generator.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 8514. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 8514 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 5-2:1991, *Photography — Density measurements — Part 2: Geometric conditions for transmission density.*

ISO 5-3:1995, *Photography — Density measurements — Part 3: Spectral conditions.*

ISO 446:1991, *Micrographics — ISO character and ISO test chart No. 1 — Description and use.*

ISO 3334:1989, *Micrographics — ISO resolution test chart No. 2 — Description and use.*

ISO 6196-7:1992, *Micrographics — Vocabulary — Part 7: Computer micrographics.*

ISO 8514-1:2000, *Micrographics — Alphanumeric computer output microforms — Quality control — Part 1: Characteristics of test slide and test data.*

ISO 9923:1994, *Micrographics — Transparent A6 microfiche — Image arrangements.*

3 Terms and definitions

For the purposes of this part of ISO 8514, the terms and definitions given in ISO 6196-7 and the following apply.

3.1

test slide

form slide designed for use in measuring the quality of output from a COM system.

4 Outline of the method

The method described is used initially to set up the COM system to yield satisfactory images and later as a means to maintain consistent performance on a day-to-day basis. If several COM recorders are in use, it also provides the means to ensure that equivalent performance is being obtained from each COM recorder.

The method first uses the test slide specified in ISO 8514-1 to determine if optimum focus of the image of the test slide is being achieved. This is carried out using the ISO No. 1 or No. 2 test chart.

The E-H patterns and density balancing areas (see Figure 1) are then used to establish the proper exposure. The data from the character generator is used to adjust and determine the registration accuracy of the data with the test slide. This is accomplished using the alignment grid. The "E" and "H" characters are used to set up the exposure from the image generator. In general, this exposure level is established by the user in relation to his own needs.

The typical set of COM characters and the characters of similar appearance (see Figure 1) are used to establish that the data from the image generator are legible.

5 Test procedure

5.1 General

The following procedure consists of obtaining first the best image of the test slide (see 5.2) and then of establishing the best image from the image generator (see 5.3).

5.2 Optimizing the test slide image

iTeh STANDARD PREVIEW
(standards.iteh.ai)

5.2.1 COM reduction ratio

The reduction ratio shall be in accordance with ISO 9923.
<https://standards.iteh.ai/standards/sist/0a8a66ae-0842-4b09-9e21-6cff03476267/iso-8514-2-2000>

The actual reduction ratio of the COM recorder shall be checked by taking the ratio of a dimension of any element of the artwork and the actual dimension on the same element on the microimage.

To do this accurately the use of a travelling microscope¹⁾ may be required, although such devices may not be readily available. An alternative method is to use a fixed microscope, with a measuring graticule, of sufficient magnification to measure the size of the image of the test slide. It is also essential that the proper reduction has been used during preparation of the test slide. In most COM systems utilizing physical form slides, and using a particular lens, the reduction ratio is fixed, hence this test is useful only in determining if the specifications of this part of ISO 8514 have been met.

5.2.2 Optical focus of the test slide

Since, in most cases, the form slide imaging system is prefocused by the manufacturer, this test is used to confirm that the minimum resolution specified in 5.2.4 is being achieved. If not, the necessary adjustment shall be made before any other operation is initiated.

For this purpose the microimage shall be checked. The value obtained is dependent not only on the COM recorder lens focus but also on the exposure conditions, film type and processing.

The maximum resolving power shall be determined through several tests carried out at various exposure settings ranging from underexposure, through normal exposure to overexposure. To measure the resolution, use either the ISO test chart No. 1 or the ISO resolution test chart No. 2 in accordance with ISO 446 and ISO 3334 respectively.

¹⁾ A travelling microscope is one designed to measure distances. Typically it has a graduated moveable stage upon which the microform is affixed, and an eyepiece with cross-hairs.

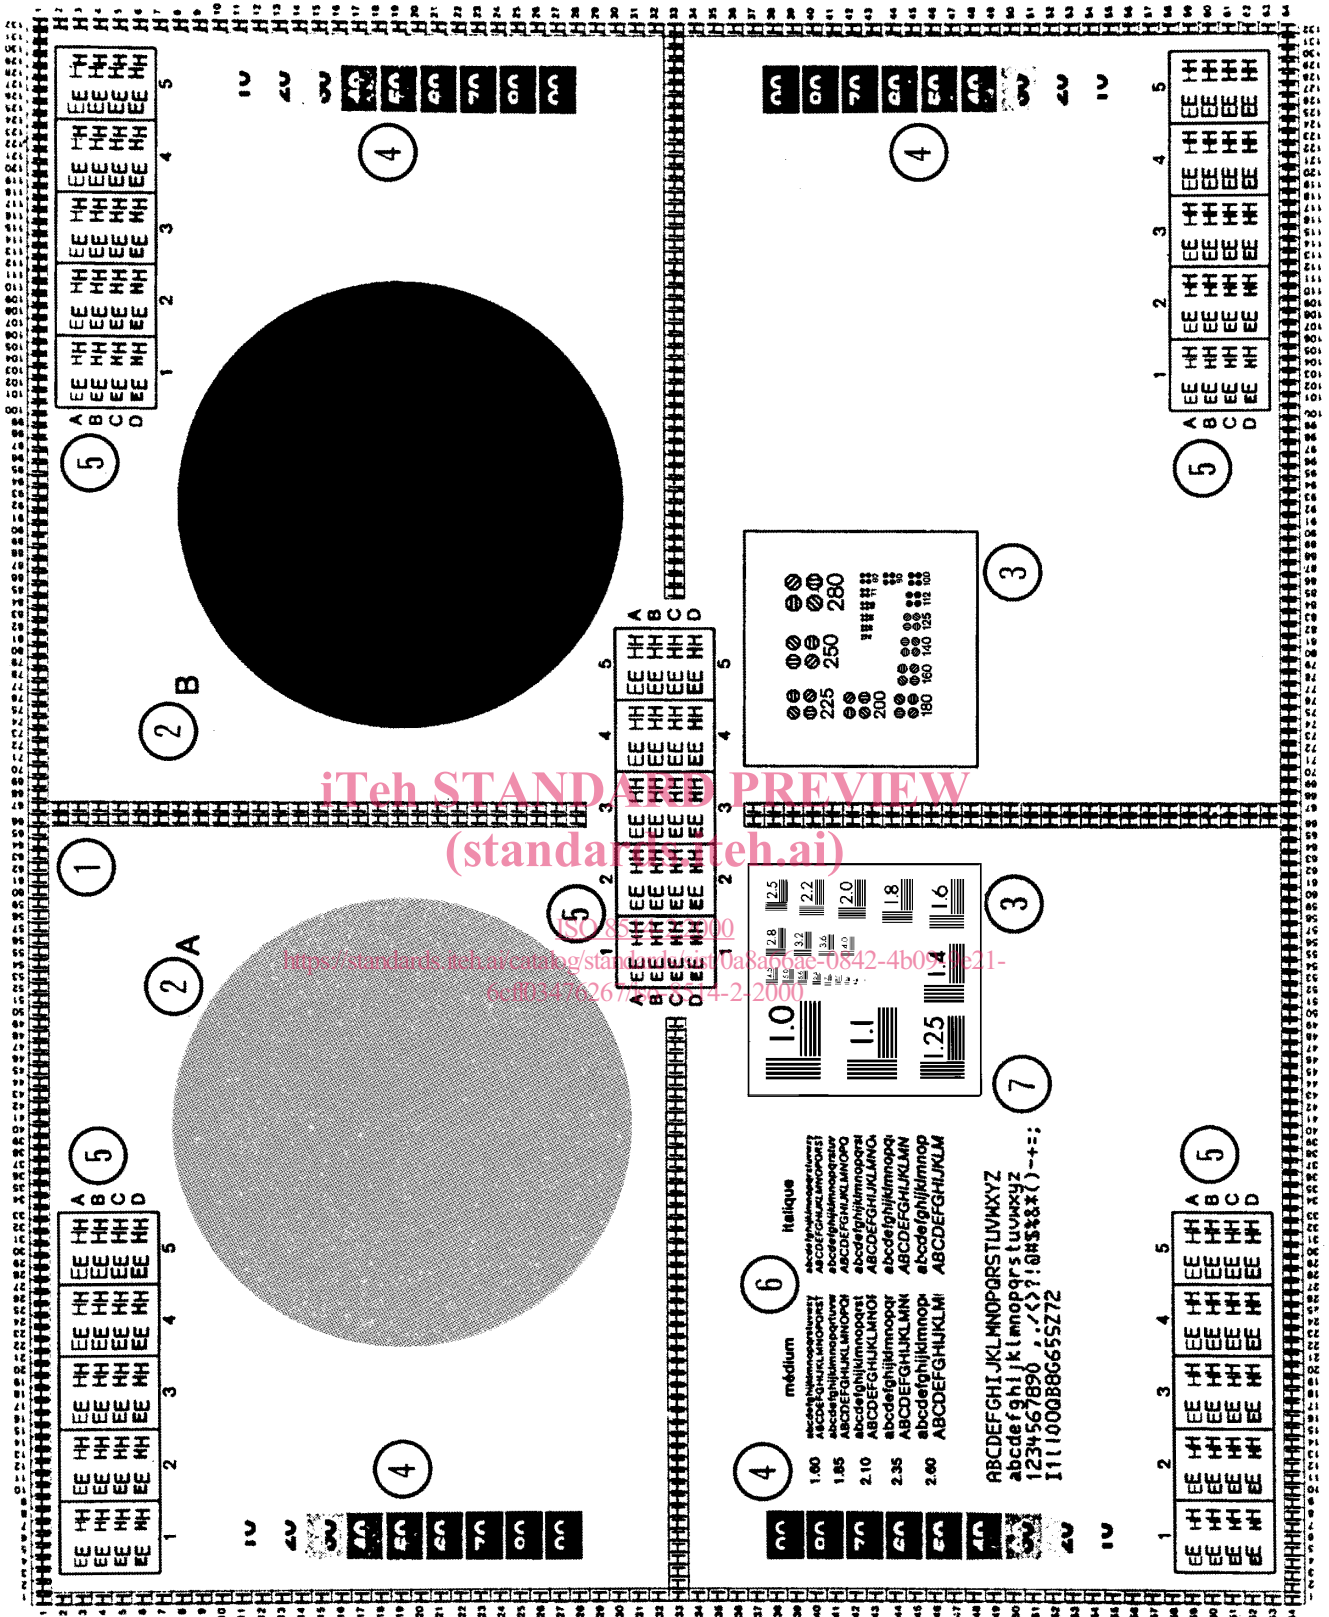


Figure 1 — Sample layout of image frame combining test slide and the generated test data

For information regarding resolving power on duplicates, see Annex A.

NOTE Maximum resolution is rarely achieved when practical exposure conditions are used.

5.2.3 Test slide exposure — Test “A”

Fill a microfiche or a suitable length of roll microfilm with images of the test slide using a series of gradually increasing form-flash intensities (line by line or column by column). Choose the exposure level for the test slide that gives an image in which the thinnest E-H pair (A1) (see area) appears underexposed and the heaviest E-H pair (D5) appears overexposed. If more than one pair appears underexposed or overexposed, choose the image in which the amount of under- and overexposure is equal. Note the exposure setting that gives these results.

Once the proper exposure level is chosen, if a densitometer which complies to ISO 5-2 and 5-3 is available, measure the visual diffuse transmission density of the appropriate density area. A densitometer with a maximum aperture of 1 mm should be used due to the high reduction ratio often used for computer output microfilm. For positive-appearing COM images measure the maximum density on the density measuring area B and for negative-appearing COM images measure the minimum density on the density measuring area B and measure the density of the density measuring area A. Also record the related coordinates (column and row) of the E and H patterns corresponding to the optimum exposure. These can be used for future checking of the system to ensure that proper exposure and processing is maintained.

If a densitometer is not available, the density balancing areas may be used as a visual comparison reference.

To read the density balancing scale, consider areas as "read" only for those having enough visual contrast to distinguish both the white and the black numbers from the background of the areas in which they are located.

5.2.4 COM resolving power

(standards.iteh.ai)

5.2.4.1 Requirements

ISO 8514-2:2000

The resolving power requirements for COM recording depend on the type of characters (font and size) being recorded and on the reduction ratio used. If the data contains lower case or complex characters, then the resolving power requirements are higher than if all upper case characters are used.

5.2.4.2 Determination

The test charts located in area are used to determine the resolving power of the system. Measurement of the resolution of the image of the test slide is used to determine the ability of the COM system to record fine detail. Since the resolving power measurement is made using a high-quality, high-contrast form slide and not the image generator, this test is not a measure of the character resolution. Resolving power shall be determined in accordance with ISO 446 or ISO 3334.

NOTE Measuring resolving power will help to determine whether the lens and film components of the system are capable of recording fine detail. The value obtained is critically dependent upon the focus of the lens. Thus, if the resolving power is below expectation a focus range test should be run at the exposure as determined in 5.2.3.

The character size being used can be determined by examining area on the image of the test slide. Compare the size of the test data EH characters with those from the test slide. Refer to Table 1 in ISO 8514-1 to determine the 'equivalent' size of the generated test characters.

Determine the quality obtained by using the following formula:

$$Q = P \times H$$

where

Q is the quality value;

P is the highest pattern number from test chart area resolved;

H is the height determined from COM character legibility test areas.

If only upper case characters are used, the height of the upper case E should be used in the above formula.

If lower case or complex characters are used, then 80 % of the height of the upper case E should be used in the above formula.

A quality value of 8 or greater, excellent copies should be obtained. A value of 5 or greater should be able to be read without difficulty. A value of 3 or less will only be read with difficulty. A minimum value of 3,6 is recommended.

NOTE Resolving power is critically dependent upon the focus of the lens. Thus if resolving power is below expectation a focus range test should be run at the optimum exposure as determined in 5.2.3.

5.2.5 Legibility control of the test slide image

Check the quality of the characters located in area. In routine work all characters in the area shall be legible. The characters located in area are a sample of standard characters recommended for use in making standard form slides.

NOTE This test is used to check that a typical form slide will produce a microimage of acceptable quality.

5.3 Optimizing the image of the image generator

5.3.1 General

Set the test slide exposure to the value determined to be optimum in test "A" for all the following tests.

5.3.2 Setting of the image generator luminance — Test "B"

Generate data (see ISO 8514-1, Figure 3) using the image generator. Prior to recording on film, align the dynamic data to the test slide grid. Fill a microfiche or a suitable length of roll microfilm with images from the test slide and image generator using gradually increasing generator intensity.

5.3.3 Legibility and exposure determination

Select the best image of the EH pairs. Use a microscope or a full size blowback microform reader to compare this image with an EH pair from the test slide having the same height and line width. Do this for each area on the test slide image. Note the number and letter position of each comparable EH set. Also examine the resolution targets on the image of the form slide to determine if the pattern resolved is equal to or smaller than the pattern determined to be required using the method described in 5.2.4.

5.3.4 Alignment

The grid area shall be used to check the alignment accuracy of the image generator, the stability of deflection frame to frame and any possible character distortion or aberration.

5.3.5 COM character set

The typical set of COM characters shall be generated in area. Examine each character to ensure legibility, particularly any sequence of similar characters.

— I, 1;

— 0, O, Q;