
Utekočinjeni naftni plin - Detekcija hidrogen sulfida - Metoda s svinčevim acetatom (ISO 8819:1993)

Liquefied petroleum gases - Detection of hydrogen sulfide - Lead acetate method (ISO 8819:1993)

Flüssiggas - Nachweis von Schwefelwasserstoff - Bleiacetatverfahren (ISO 8819:1993)

Gaz de pétrole liquéfiés - Détection de l'acide sulfhydrique - Méthode à l'acétate de plomb (ISO 8819:1993)

iTeh STANDARD PREVIEW

(standards.itteh.ai)

[SIST EN ISO 8819:1998](https://standards.itteh.ai/catalog/standards/sist/187db3be-6425-49ce-8834-10659a682e31/sist-en-iso-8819-1998)

Ta slovenski standard je istoveten z: EN ISO 8819:1995

<https://standards.itteh.ai/catalog/standards/sist/187db3be-6425-49ce-8834-10659a682e31/sist-en-iso-8819-1998>

ICS:

75.160.30 Plinska goriva Gaseous fuels

SIST EN ISO 8819:1998

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN ISO 8819:1998

<https://standards.iteh.ai/catalog/standards/sist/187db3be-6425-49ce-8834-f6859a882e31/sist-en-iso-8819-1998>

EUROPEAN STANDARD

EN ISO 8819

NORME EUROPÉENNE

EUROPÄISCHE NORM

January 1995

ICS 75.160.30

Descriptors: petroleum products, liquefied petroleum gases, chemical analysis, detection, hydrogen sulfide

English version

Liquefied petroleum gases - Detection of hydrogen sulfide - Lead acetate method (ISO 8819:1993)

Gaz de pétrole liquéfiés - Détection de l'acide sulfhydrique - Méthode à l'acétate de plomb (ISO 8819:1993) Flüssiggase - Nachweis von Schwefelwasserstoff - Bleiacetatverfahren (ISO 8819:1993)

(standards.iteh.ai)

SIST EN ISO 8819:1998

<https://standards.iteh.ai/catalog/standards/sist/187db3be-6425-49ce-8834-f6859a882e31/sist-en-iso-8819-1998>

This European Standard was approved by CEN on 1995-01-02. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

The European Standards exist in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Foreword

This European Standard has been taken over by the Technical Committee CEN/TC 19 "Petroleum products, lubricants and related products" from the work of ISO/TC 28 "Petroleum products and lubricants" of the International Organization for Standardization (ISO).

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by July 1995, and conflicting national standards shall be withdrawn at the latest by July 1995.

According to the CEN/CENELEC Internal Regulations, the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, United Kingdom.

Endorsement notice

The text of the International Standard ISO 8819:1993 was approved by CEN as a European Standard without any modification.

(standards.iteh.ai)

[SIST EN ISO 8819:1998](https://standards.iteh.ai/catalog/standards/sist/187db3be-6425-49ce-8834-f6859a882e31/sist-en-iso-8819-1998)

<https://standards.iteh.ai/catalog/standards/sist/187db3be-6425-49ce-8834-f6859a882e31/sist-en-iso-8819-1998>

INTERNATIONAL
STANDARD

ISO
8819

Second edition
1993-10-01

**Liquefied petroleum gases — Detection of
hydrogen sulfide — Lead acetate method**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

*Gaz de pétrole liquéfiés — Détection de l'acide sulfhydrique — Méthode
à l'acétate de plomb*

[SIST EN ISO 8819:1998](#)

[https://standards.iteh.ai/catalog/standards/sist/187db3be-6425-49ce-8834-
f6859a882e31/sist-en-iso-8819-1998](https://standards.iteh.ai/catalog/standards/sist/187db3be-6425-49ce-8834-f6859a882e31/sist-en-iso-8819-1998)



Reference number
ISO 8819:1993(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 8819 was prepared by Technical Committee ISO/TC 28, *Petroleum products and lubricants*.

This second edition cancels and replaces the first edition (ISO 8819:1987), which has been technically revised.

Annex A of this International Standard is for information only.

© ISO 1993

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Liquefied petroleum gases — Detection of hydrogen sulfide — Lead acetate method

WARNING — The use of this International Standard may involve hazardous materials, operations and equipment. This standard does not purport to address all of the safety problems associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

1 Scope

This International Standard specifies a method for the detection of hydrogen sulfide in liquefied petroleum gases.

The lower limit of detectability is 4 mg of hydrogen sulfide in 1 m³ of liquefied petroleum gas. Methyl mercaptan, if present, produces a transitory yellow stain on lead acetate paper which, however, fades completely in less than 5 min. Other sulfur compounds present in liquefied petroleum gas do not interfere with the test.

NOTE 1 Liquefied petroleum gases and the products of their combustion should not be unduly corrosive or reactive to materials with which they come into contact. It is therefore important that the presence of any hydrogen sulfide, a highly reactive substance, be detected. Additionally, the odour of hydrogen sulfide is unacceptable in some applications of liquefied petroleum gases (e.g. lighter fuel).

2 Principle

The vaporized sample is passed over moist lead acetate paper under controlled conditions. Hydrogen sulfide reacts with lead acetate to form lead sulfide and thus produces a coloration on the paper which will vary from yellow to black, depending upon the amount of hydrogen sulfide present.

3 Apparatus

3.1 Apparatus for detecting hydrogen sulfide in liquefied petroleum gas, as shown in figure 1.

3.2 Lead acetate test paper, either prepared by dipping strips of smooth filter paper into an aqueous 50 g/l solution of lead acetate, withdrawing the strips and removing excess solution from them with clean filter paper, or commercially available test paper if it is of a type that has been shown to give similar results to paper prepared as above.

The strips of the test paper shall be approximately 51 mm long by 9,5 mm wide and have a 3,5 mm diameter hole near to one end. This hole shall permit the strip to hang freely in the test apparatus.

3.3 Flow indicator, comprising a wet test meter or variable area flowmeter, which measures gas flow rates in the range of 2 l/min to 3 l/min.

4 Sampling


Information on constraints to the use of sample containers and to laboratory testing is given in annex A.

5 Procedure

5.1 Connect the test apparatus (3.1) to the sample source with a minimum length of clean stainless steel tubing.

NOTE 2 The use of rubber hoses, stoppers, etc., should be avoided since hydrogen sulfide has an affinity for rubber which will result in erroneous test results.

Flush the line and apparatus with the sample gas for approximately 1 min. Fill the water reservoir with water at a temperature of 60 °C to 80 °C. By use of the needle valve, adjust the rate of gas flow to 2,3 l/min \pm 0,2 l/min.

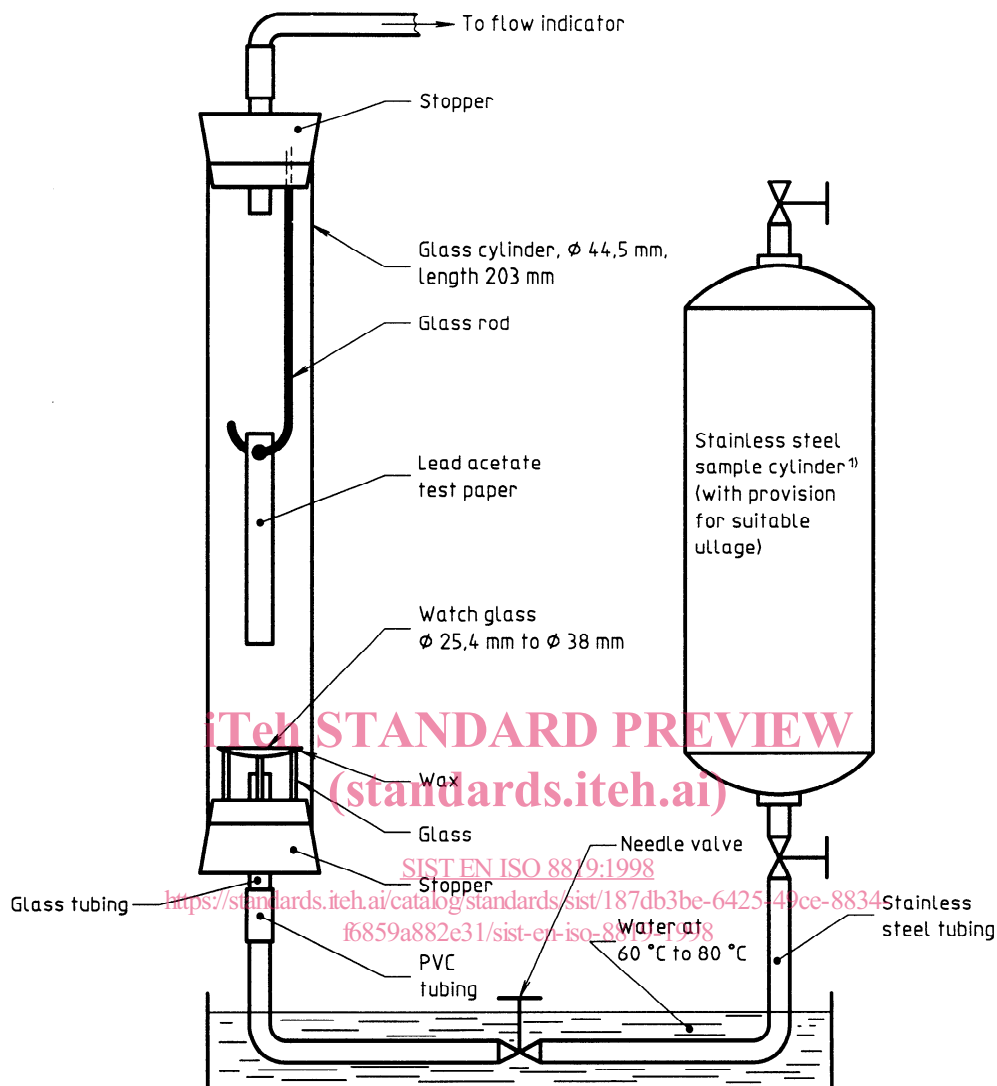

1) It is preferable to avoid the use of a sample cylinder by instead using a direct connection to the sample source (see clause 4).

Figure 1 — Apparatus for detecting hydrogen sulfide in liquefied petroleum gas

NOTE 3 Any restriction in the downstream flow indicator, or rapid opening of the needle valve, may result in over-pressuring of the glass cylinder.

Immediately place a single strip of lead acetate paper on the hook in the glass cylinder of the apparatus (3.1) so that the paper, moistened with distilled water, is held midway between the watch glass and the bottom of the upper stopper. Expose the moist paper

for exactly 2 min to the gas flow maintained at $2,3 \text{ l/min} \pm 0,2 \text{ l/min}$. Remove the test paper and proceed as described in 5.2.

5.2 Compare the exposed test paper with a moistened test paper that has not been exposed.

5.2.1 If the distinct coloration is absent, report hydrogen sulfide negative.

5.2.2 If a distinct coloration is present, wait 5 min and again compare the exposed test paper with the moistened test paper that has not been exposed and record the test result as follows:

- a) if the distinct coloration has persisted, report hydrogen sulfide positive;
- b) if initially there was a distinct yellow coloration that is no longer present after 5 min, report methyl mercaptan present.

NOTE 4 In the case of pass-fail data or results from other qualitative tests, no generally accepted method for determining precision is currently available.

6 Test report

The test report shall contain at least the following information:

- a) sufficient details for complete identification of the product tested;
- b) a reference to this International Standard;
- c) the result of the test;
- d) any deviation, by agreement or otherwise, from the procedure specified;
- e) the date of the test.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN ISO 8819:1998](https://standards.iteh.ai/catalog/standards/sist/187db3be-6425-49ce-8834-f6859a882e31/sist-en-iso-8819-1998)

<https://standards.iteh.ai/catalog/standards/sist/187db3be-6425-49ce-8834-f6859a882e31/sist-en-iso-8819-1998>