



SLOVENSKI STANDARD

SIST EN 16054:2014

01-marec-2014

Kolesa BMX - Varnostne zahteve in preskusne metode

BMX bicycles - Safety requirements and test methods

BMX-Fahrräder - Sicherheitstechnische Anforderungen und Prüfverfahren

Bicyclette BMX - Exigences de sécurité et méthodes d'essai

Ta slovenski standard je istoveten z: EN 16054:2012

[SIST EN 16054:2014](https://standards.iteh.ai/catalog/standards/sist/a9265294-6f7b-4080-9429-7f0c06ebb479/sist-en-16054-2014)

<https://standards.iteh.ai/catalog/standards/sist/a9265294-6f7b-4080-9429-7f0c06ebb479/sist-en-16054-2014>

ICS:

43.150

Kolesa

Cycles

SIST EN 16054:2014

en,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 16054:2014

<https://standards.iteh.ai/catalog/standards/sist/a9265294-6f7b-4080-9429-7f0c06ebb479/sist-en-16054-2014>

EUROPEAN STANDARD

EN 16054

NORME EUROPÉENNE

EUROPÄISCHE NORM

September 2012

ICS 43.150

English Version

BMX bicycles - Safety requirements and test methodsBicyclette BMX - Exigences de sécurité et méthodes
d'essaiBMX-Fahrräder - Sicherheitstechnische Anforderungen und
Prüfverfahren

This European Standard was approved by CEN on 27 July 2012.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

SIST EN 16054:2014

<https://standards.iteh.ai/catalog/standards/sist/a9265294-6f7b-4080-9429-7f0c06ebb479/sist-en-16054-2014>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	4
1 Scope	5
2 Normative references	5
3 Terms and definitions	5
4 Requirements and test methods	7
4.1 Numbers and condition of test specimens	7
4.2 Accuracy tolerances and test conditions	7
4.2.1 Accuracy — Tolerances	7
4.2.2 Test conditions — Fatigue tests	8
4.3 Crack detection methods	8
4.4 Sharp edges	8
4.5 Protrusions.....	8
4.5.1 Requirements	8
4.5.2 Test method.....	10
4.5.3 Pegs	10
4.6 Security and strength of safety-related fasteners.....	11
4.6.1 Security of screws	11
4.6.2 Minimal failure torque	11
4.6.3 Folding bicycle.....	11
4.6.4 Quick release devices	11
4.7 Pegs/axles assembly.....	11
4.7.1 Pegs — Resistance to loosening	11
4.7.2 Resistance to deflection	12
4.8 Brakes	13
4.8.1 Braking-systems	13
4.8.2 Hand-operated brakes.....	13
4.8.3 Attachment of brake assembly and cable requirements	16
4.8.4 Brake adjustment.....	16
4.8.5 Brake-block and brake-pad assemblies — Security test.....	16
4.8.6 Hand-operated braking-system — Strength test.....	17
4.8.7 Braking performance.....	17
4.9 Steering.....	27
4.9.1 Handlebar dimensions	27
4.9.2 Handlebar grips and plugs	27
4.9.3 Handlebar-stem with quill — Insertion-depth mark or positive stop	28
4.9.4 A-head set stem Handlebar stem-extension to fork-stem — Clamping requirements.....	28
4.9.5 Steering stability	29
4.9.6 Handlebar and stem assembly.....	29
4.9.7 Handlebar-stem to fork-stem — Torsional security test.....	32
4.9.8 Handlebar and stem assembly — Fatigue test	33
4.9.9 Handlebar/stem assembly impact test	34
4.10 Frame	35
4.10.1 Dummy fork characteristics	35
4.10.2 Frame — Impact test (falling mass)	36
4.10.3 Frame — Impact test (falling frame).....	38
4.10.4 Frame — Fatigue test with pedalling forces	39
4.10.5 Frame — Fatigue test with horizontal forces.....	41
4.11 Fork	42
4.11.1 Front fork — Means of location of the axle and wheel retention.....	42
4.11.2 Front fork — Static bending test.....	42
4.11.3 Front fork — Rearward impact test.....	43

4.11.4	Front fork – Bending fatigue test.....	45
4.12	Wheels and wheel/tyre assemblies	45
4.12.1	Rotational accuracy	45
4.12.2	Wheel/tyre assembly — Clearance	46
4.12.3	Wheel/tyre assembly — Static strength test.....	47
4.12.4	Wheel retention.....	47
4.13	Rims, tyres and tubes	48
4.13.1	General	48
4.13.2	Tyre inflation pressure.....	48
4.13.3	Tyre and rim compatibility.....	48
4.13.4	Rim-wear.....	49
4.13.5	Wheel/tyre assembly – Impact test.....	49
4.14	Pedals and pedal/crank drive system	50
4.14.1	Pedal tread	50
4.14.2	Pedal clearance	50
4.14.3	Pedal/pedal-spindle assembly —Static strength test.....	51
4.14.4	Pedal/pedal-spindle — Dynamic durability test	52
4.14.5	Crank/pedal assembly impact test and plastic pedal impact test.....	53
4.14.6	Drive-system - Static strength test.....	54
4.14.7	Crank assembly — Fatigue tests	55
4.15	Saddle and seat-pillars	57
4.15.1	General	57
4.15.2	Limiting dimensions.....	57
4.15.3	Seat-pillar — Insertion-depth mark or positive stop.....	57
4.15.4	Saddle/seat pillar - Security test.....	58
4.15.5	Saddle - Static strength test.....	59
4.15.6	Saddle and seat-pillar clamp — Fatigue test.....	59
4.15.7	Seat-pillar clamp - Static test.....	60
4.16	Drive-chain	61
4.17	Chain guard.....	61
4.17.1	Requirement.....	61
4.17.2	Chain-wheel disc diameter.....	61
4.17.3	Chain protective device	62
4.18	Lighting systems and reflectors	63
4.18.1	Lighting and reflectors.....	63
4.18.2	Wiring harness.....	63
4.19	Warning device	63
5	Manufacturer's instructions	63
6	Marking.....	64
6.1	Requirement.....	64
6.2	Durability test.....	65
6.2.1	Requirement.....	65
6.2.2	Test method	65
	Bibliography.....	66

EN 16054:2012 (E)

Foreword

This document (EN 16054:2012) has been prepared by Technical Committee CEN/TC 333 “Cycles”, the secretariat of which is held by UNI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2013, and conflicting national standards shall be withdrawn at the latest by March 2013.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 16054:2014](#)

<https://standards.iteh.ai/catalog/standards/sist/a9265294-6f7b-4080-9429-7f0c06ebb479/sist-en-16054-2014>

1 Scope

This European Standard specifies safety and performance requirements for the design, assembly and testing of BMX bicycles and sub-assemblies intended for use in any type of location such as roads and/or tracks and/or ramps. It applies to specialised types of bicycle designed and equipped for activities such as acrobatic ground manoeuvres, stunting and aerobic manoeuvres and lays down guidelines for instructions on the use and care of such BMX bicycles.

It applies to BMX bicycles on which the saddle height can be adjusted to provide a minimum saddle height of 435 mm or more.

It applies to:

- a) category 1, BMX designed for a rider mass of 45 kg or less;
- b) category 2, BMX designed for a rider mass more than 45 kg.

It does not apply to BMX bicycles for use in sanctioned competition events.

No requirements on lighting set, reflectors and warning devices are specified in this European Standard due to the existence of several different national regulations applicable in the European countries.

2 Normative references

The following documents, in whole or in part are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN ISO 1101, *Geometrical Product Specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out (ISO 1101)*

ISO 9633, *Cycle chains — Characteristics and test methods*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

BMX

bicycle designed for use in any type of location such as roads, tracks and/or ramps and equipped with single speed freewheel transmission, no suspension systems and no back pedal brake

3.2

free-wheel transmission

gearing mechanism which is designed to disengage the wheel from the pedal mechanism in one rotating direction

3.3

peg

component that allows the rider to stand during aerobic manoeuvres or to slide on static objects

3.4

rotor

part of the brake system that allows an infinite rotation of the steering system around its axis

EN 16054:2012 (E)

- 3.5
cycle**
vehicle that has at least two wheels and is propelled solely or mainly by the muscular energy of the person on that vehicle, in particular by means of pedals
- 3.6
bicycle**
two-wheeled cycle
- 3.7
fully-assembled bicycle**
bicycle fitted with all components necessary for its intended use
- 3.8
maximum saddle height**
vertical distance from the ground to the top of the seat surface, measured with the seat in a horizontal position and with the seat-pillar set to the minimum insertion depth
- 3.9
braking distance**
distance travelled by a bicycle between the commencement of braking (3.10) and the point at which the bicycle comes to rest
- 3.10
commencement of braking**
point on the test track or test machine at which the brake actuating device operated directly by the rider's hand or by a test mechanism starts to move from its rest position, on the test track this point being determined by the first brake actuating device (front or rear) to operate
- 3.11
braking force**
 F_{Br}
tangential rearward force between the tyre and the ground or the tyre and the drum or belt of the test machine
- 3.12
rim-brake**
brake in which brake-shoes act on the rim of the wheel
- 3.13
pedal tread-surface**
surface of a pedal that is presented to the underside of the foot
- 3.14
crank assembly**
assembly which, for fatigue testing, consists of the two cranks, the pedal-spindles (possibly with adaptors), the bottom-bracket spindle, and the first component of the drive system, e.g. the chain-wheel cluster
- 3.15
visible crack**
crack which results from a test where that crack is visible to the naked eye
- 3.16
fracture**
unintentional separation into two or more parts
- 3.17
wheel-base**
distance between the axes of the front and rear wheels of an un-laden bicycle

3.18**wheel**

assembly or combination of hub, spokes or disc, and rim, but excluding the tyre

3.19**quick-release device**

device to fix or release a part without a tool

3.20**maximum inflation pressure**

maximum tyre pressure recommended by the tyre manufacturer

3.21**exposed protrusion**

protrusion which, through its location and rigidity, could present a hazard to the rider either through heavy contact with it in normal use or should the rider fall onto it in an accident

4 Requirements and test methods**4.1 Numbers and condition of test specimens**

In general, for static, impact and fatigue tests, each test shall be conducted on a new test sample, but if only one sample is available, it is permissible to conduct all of these tests on the same sample with the sequence of testing being fatigue, static and impact.

If more than one test is conducted on the same sample, the test sequence shall be clearly recorded in the test report or record of testing.

NOTE It should be noted that if more than one test is conducted on the same sample, earlier tests can influence the results of subsequent tests. In addition, if a sample fails when it has been subjected to more than one test, a direct comparison with single testing is not possible.

In all strength tests, specimens shall be in the fully finished condition.

4.2 Accuracy tolerances and test conditions**4.2.1 Accuracy — Tolerances**

Unless stated otherwise, accuracy tolerances based on the nominal values shall be as follows:

- forces and torques 0/+ 5 %;
- masses and weights ± 1 %;
- dimensions ± 1 mm;
- angles ± 1 ;
- time duration ± 5 s;
- temperatures ± 2 °C;
- pressures ± 5 %.

EN 16054:2012 (E)**4.2.2 Test conditions — Fatigue tests**

The shape of the signal is not specified in the standard. However, the intention is for the force to be applied and released progressively.

Unless stated otherwise, the frequency shall be adapted to insure a good application of the loading and shall not exceed 10 Hz.

To allow for the initial settling of carbon-fibre components, the initial value has to be taken on the mean of 10 cycles after 1 000 load cycles.

4.3 Crack detection methods

Standardised methods should be used to emphasise the presence of cracks where visible cracks are specified as criteria of failure in tests specified in this standard (see 3.15).

NOTE For example, suitable dye-penetrant methods are specified in EN ISO 3452 series.

4.4 Sharp edges

Exposed edges that could come into contact with the rider's hands, legs, etc., during normal riding or normal handling and normal maintenance shall not be sharp.

4.5 Protrusions**4.5.1 Requirements****4.5.1.1 Exposed protrusions**

Any rigid exposed protrusion longer than 8 mm (see L in Figure 1) after assembly except:

- a) the rim-brake mechanism at the front and rear wheels;
- b) a lamp-bracket fitted on the headtube;
- c) reflectors;
- d) clipless attachment mechanism;
- e) chainwheels and sprockets;
- f) bottle carrier;
- g) brake rotor;
- h) pedal tread;


shall terminate in a radius, R (see Figure 1), of not less than 6,3 mm. Such protrusions shall have a major end dimension, A , not less than 12,7 mm and a minor dimension, B , not less than 3,2 mm.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 16054:2014

https://standards.iteh.ai/catalog/standards/sist/c9c5231c-2710-4988-b031-7f0c06ebb479/sist-en-16054-2014

Dimensions in millimetres

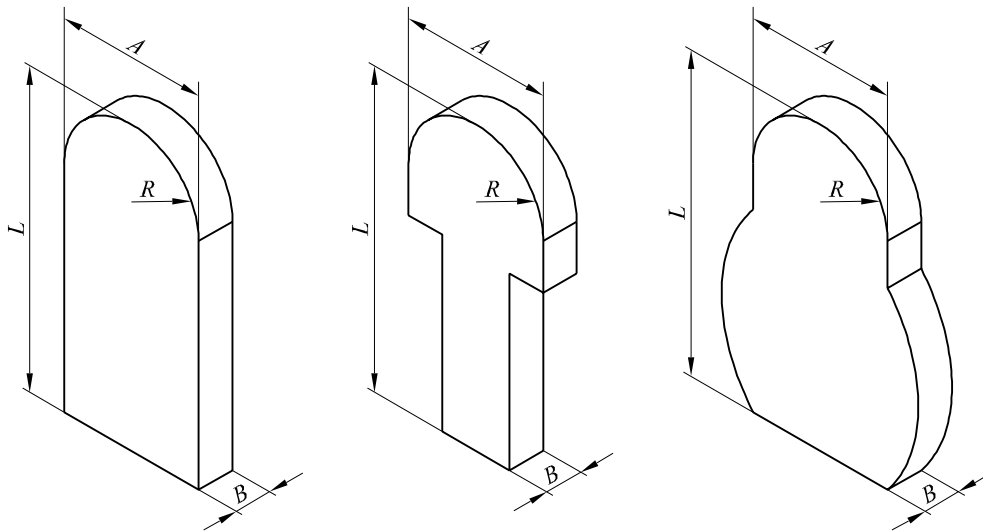**Key** $R \geq 6,3$ $A \geq 12,7$ $B \geq 3,2$

iTeh STANDARD PREVIEW

Figure 1 — Examples of minimum dimensions of exposed protrusions (which apply only when L is greater than 8 mm)

SIST EN 16054:2014

<https://standards.iteh.ai/catalog/standards/sist/a9265294-6f7b-4080-9429-7f0c06ebb479/sist-en-16054-2014>

Dimensions in millimetres

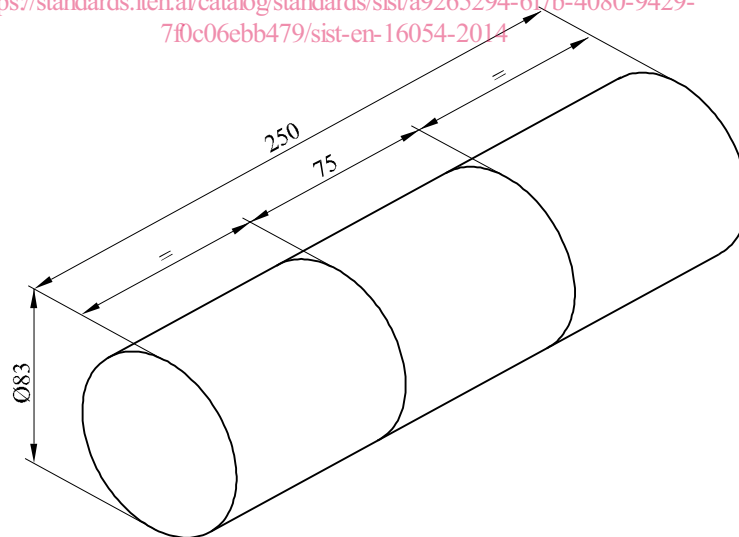


Figure 2 — Exposed protrusion test cylinder

4.5.1.2 Exclusion zone, protective devices and screw threads

There shall be no protrusions on the top tube of a bicycle frame between the saddle and a point 300 mm forward of the saddle, with the exception that outer cable casing no greater than 6,4 mm in diameter and cable guides and outer cable stops made from material no thicker than 4,8 mm may be attached to the top tube.

Foam pads attached to the bicycle frame to act as protective cushions are permitted, provided that the bicycle meets the requirements for protrusions when the pads are removed.

EN 16054:2012 (E)


A screw thread that is an exposed protrusion shall be limited to a protrusion length of one major diameter of the screw beyond the internally threaded mating part.

4.5.2 Test method

Conduct the test with a protrusion test cylinder (which simulates a limb) having the dimensions shown in Figure 2.

Manoeuvre the test cylinder in all possible attitudes towards any rigid protrusion on the bicycle. If the central 75 mm long section of the cylinder contacts the protrusion that protrusion shall be considered to be an exposed protrusion and it shall comply with 4.5.1.1.

Examples of protrusions which need and do not need to comply with the requirements are shown in Figure 3.

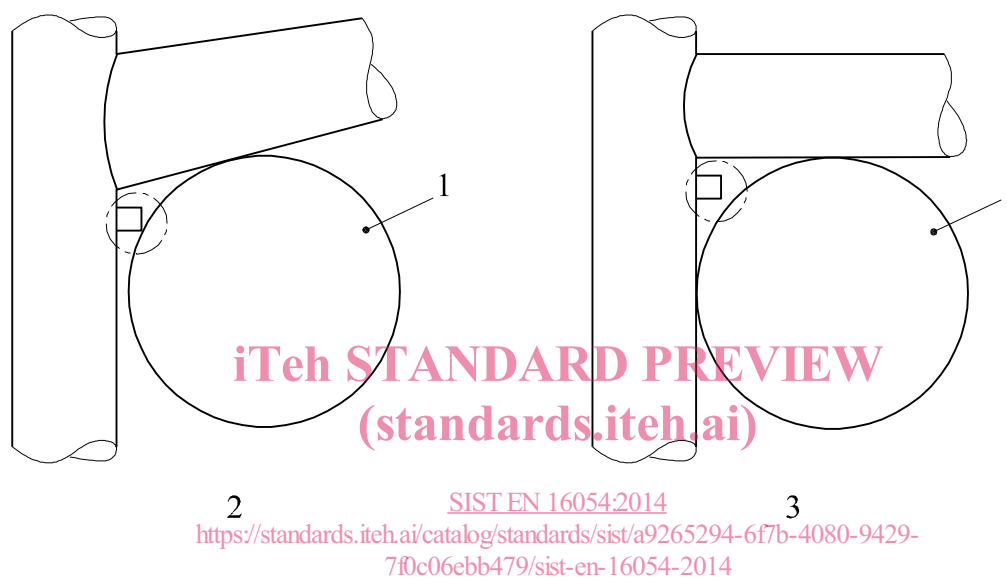

Key

- 1 test cylinder
- 2 protrusion shall comply
- 3 protrusion need not to comply

Figure 3 — Examples of protrusions

4.5.3 Pegs

External extremities of the pegs (see Figure 4) shall have a chamfer or a fillet of at least 1,6 mm and an angle from 30° min to 45° max. The dimension A shall be at least 1,6 mm.

Dimensions in millimetres

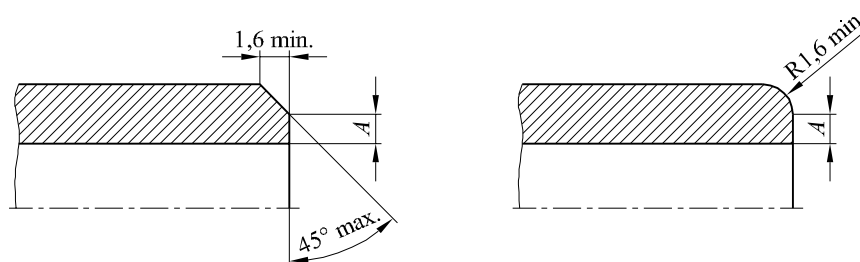


Figure 4 — Peg's extremity

4.6 Security and strength of safety-related fasteners

4.6.1 Security of screws

Any screws used to attach brake-mechanisms to the frame or fork, and the saddle to the seat-pillar shall be provided with suitable locking devices, e.g., lock-washers, lock-nuts, or stiff nuts.

4.6.2 Minimal failure torque

The minimum failure torque of bolted joints for the fastening of handlebars, handlebar stems, seats and seat pillars shall be at least 50 % greater than the manufacturer's recommended tightening torque.

4.6.3 Folding bicycle

Folding bicycles shall meet all test requirements.

Folding mechanisms shall be designed so that the bicycle can be locked for use in a simple, stable, safe way and when folded no damage shall occur to any cables. No locking mechanism shall contact the wheels or tyres during riding, and it shall be impossible to unintentionally loosen or unlock the folding mechanisms during riding.

4.6.4 Quick release devices

No form of quick release system shall be permitted for wheel axle retention.

4.7 Pegs/axles assembly


4.7.1 Pegs — Resistance to loosening

4.7.1.1 Requirements

When tested according to test method described in 4.7.1.2, pegs shall not unscrew.

4.7.1.2 Test method

Apply a tangential force of 700 N at the midpoint of each peg, in such a way to produce the maximum unscrewing torque as shown in Figure 5. Apply the load for one minute and check if the requirements are met.

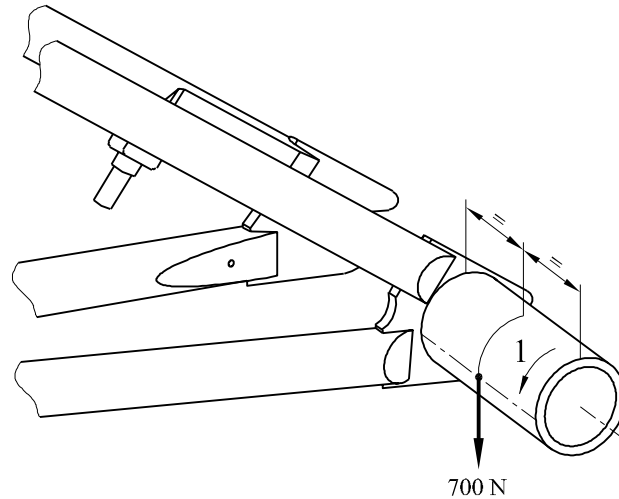**Key**

1 unscrewing

Figure 5 — Pegs – Resistance loosening

In case of noncircular cross section, apply the tangential load at the longer side.


4.7.2 Resistance to deflection**4.7.2.1 Requirements**

Pegs shall not show a total deflection under load, greater than 30° (measured on the pegs) to the axle axis when tested according to test method described in 4.7.2.2.

4.7.2.2 Test method

Perform a separate static test on each pair of front and back peg/axle assembly of a complete bike with the pegs supported at their midpoint.

Apply a vertical force, F , of 3 000 N on the wheel, in a direction normal to the peg longitudinal axis and corresponding to the vertical direction, with the bicycle standing on the ground, as shown in Figure 6. Apply the load for one minute and check if the requirements are met before removing the load.

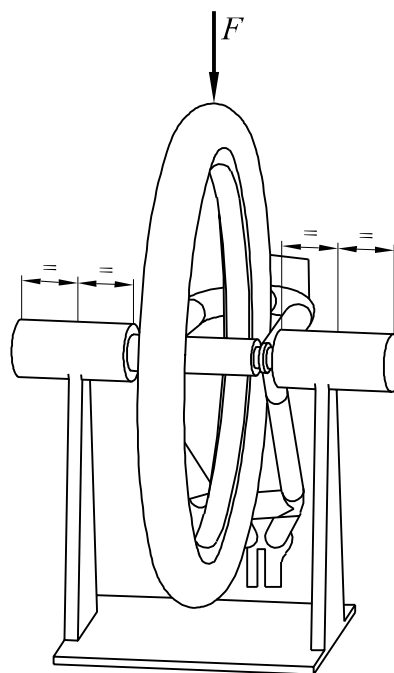**Key**

$F = 3\,000\text{ N}$

iTeh STANDARD PREVIEW

Figure 6 — Pegs — Resistance to deflection (example of test configuration)

4.8 Brakes

SIST EN 16054:2014

[https://standards.iteh.ai/catalog/standards/sist/a9265294-6f7b-4080-9429-](https://standards.iteh.ai/catalog/standards/sist/a9265294-6f7b-4080-9429-7f0c06ebb479/sist-en-16054-2014)

4.8.1 Braking-systems

7f0c06ebb479/sist-en-16054-2014

A bicycle shall be equipped with at least two independent braking-systems.

At least one shall operate on the front wheel and one on the rear wheel. The braking-systems shall operate without binding and shall be capable of meeting the braking-performance requirements of 4.8.7.

NOTE The inner cable should be protected from corrosion, e.g. by suitable impervious liner to the outer casing.

4.8.2 Hand-operated brakes

4.8.2.1 Brake-lever position

The handbrake levers for front and rear brakes shall be positioned according to the legislation or custom and practice of the country in which the bicycle is to be sold, and the bicycle manufacturer shall state in the manufacturer's instructions which lever operates the front brake and which lever operates the rear brake (see also Clause 5, list entry b)).

4.8.2.2 Brake-lever grip dimensions

4.8.2.2.1 Requirement

The maximum grip dimension, d , measured between the outer surfaces of the brake-lever in the region intended for contact with the rider's fingers and the handlebar or any other covering present shall over a distance of not less than 40 mm as shown in Figure 7, conform to the following:

— for category 1 d shall not exceed 75 mm;