



SLOVENSKI STANDARD
kSIST-TP FprCEN/TR 1591-5:2011
01-november-2011

Prirobnice in prirobnični spoji - Pravila za načrtovanje okroglih prirobničnih spojev s tesnili - 5. del: Metoda izračuna prirobničnih spojev s tesnilom

Flanges and their joints - Design rules for gasketed circular flange connections - Part 5: Calculation method for full face gasketed joints

Flansche und ihre Verbindungen - Regeln für die Auslegung von Flanschverbindungen mit runden Flanschen und Dichtung - Teil 5: Berechnungsmethode für Verbindungen mit vollflächiger Dichtung

Brides et leurs assemblages - Règles de calcul des assemblages à brides circulaires avec joint - Partie 5: Méthode de calcul pour assemblages avec joints pleine face

Ta slovenski standard je istoveten z: FprCEN/TR 1591-5

ICS:

23.040.60 Prirobnice, oglavki in spojni elementi Flanges, couplings and joints

kSIST-TP FprCEN/TR 1591-5:2011 en,fr,de

TECHNICAL REPORT
RAPPORT TECHNIQUE
TECHNISCHER BERICHT

FINAL DRAFT
FprCEN/TR 1591-5

August 2011

ICS 23.040.60

English Version

Flanges and their joints - Design rules for gasketed circular flange connections - Part 5: Calculation method for full face gasketed joints

Brides et leurs assemblages - Règles de calcul des assemblages à brides circulaires avec joint - Partie 5: Méthode de calcul pour assemblages avec joints pleine face

Flansche und ihre Verbindungen - Regeln für die Auslegung von Flanschverbindungen mit runden Flanschen und Dichtung - Teil 5: Berechnungsmethode für Verbindungen mit vollflächiger Dichtung

This draft Technical Report is submitted to CEN members for Technical Committee Approval. It has been drawn up by the Technical Committee CEN/TC 74.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a Technical Report. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a Technical Report.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
1 Scope	3
2 Normative references	3
3 Symbols and abbreviated terms	3
4 Introduction	5
5 Definition of an equivalent gasket	6
6 Effective gasket geometry	13
7 Modification of tightness criteria equations	13
8 Application of the proposed method on several standard assemblies	15
9 Application of the proposed method on a non-standard assembly	18
10 Conclusion	22
Bibliography	23

Figures

Figure 1 — "FULL FACE" gasket areas division and definition of the equivalent gasket	6
Figure 2 — Compressed gasket width.....	7
Figure 3 — Variation of E_G versus initial gasket stress Q	7
Figure 4 — Flange rotation	8
Figure 5 — Case with no contact on the inside part of the gasket.....	8
Figure 6 — Case with contact on the inside part of the gasket	9
Figure 7 — Gasket force calculation on bolt hole part	9
Figure 8 — Equivalent gasket external diameter in plastic case.....	12
Figure 9 — Effective sealing and mechanical parts.....	14
Figure 10 — Elastic/plastic gasket behaviour combination	14
Figure 11 — Relative equivalent gasket dimensions	16
Figure 12 — Required bolt up load ratio (EN 1591-1 based proposed method/ TAYLOR-FORGE based method).....	17
Figure 13 — Load ratios for all the elements	17
Figure 14 — Initial required bolt load comparison	20
Figure 15 — Relative effective sealing width	21
Figure 16 — Gasket sealing width comparison.....	22

Foreword

This document (FprCEN/TR 1591-5:2011) has been prepared by Technical Committee CEN/TC 74 “Flanges and their joints”, the secretariat of which is held by DIN.

This document is currently submitted to the Technical Committee Approval.

EN 1591 "*Flanges and their joints — Design rules for gasketed circular flange connections*" consists of the following parts:

- *Part 1: Calculation method*
- *Part 2: Gasket parameters*
- *Part 3: Calculation method for metal to metal contact type flanged joint (CEN/TS)*
- *Part 4: Qualification of personnel competency in the assembly of bolted joints fitted to equipment subject to the Pressure Equipment Directive*
- *Part 5: Calculation method for full face gasketed joints (CEN/TR)*
- *Part 6: Sample calculations for EN 1591-1*

1 Scope

This Technical Report gives guidance for the calculation of full face gasketed joints on the basis of the calculation method given in EN 1591-1.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 1591-1:2001+A1:2009, *Flanges and their joints — Design rules for gasketed circular flange connections — Part 1: Calculation method*

3 Symbols and abbreviated terms

A_{Ge} effective gasket area ($= \pi * d_{Ge} * b_{Ge}$), [mm²], see Equation (26)

b_{Ge} effective gasket width, (mm), see Figure 2

b_{Gi} interim value of effective gasket width, [mm]

b_{Gseal} effective sealing gasket width, [mm], Figure 9

b_{GQ} compressed gasket width, [mm], Figure 2

FprCEN/TR 1591-5:2011 (E)

d_{F1}	gasket force acting diameter for zone A, Equations (12), (14)
d_{F2}	gasket force acting diameter for zone B, Equations (7), (10)
d_{F3}	resultant gasket force acting diameter on outside area of the real gasket, [mm], Equation (16)
d_{F4}	resultant gasket force acting diameter on outside area of the equivalent gasket, [mm], Equation (19)
d_{G1}	inside diameter of gasket theoretical contact area, [mm], Figure 1
d_{G2}	outside diameter of gasket theoretical contact area, [mm], Figure 1
d_{G3}	outside diameter of bolt holes part for the equivalent gasket, [mm], Figure 1
d_{G4}	outside diameter of equivalent gasket, [mm], Figure 1
d_{Gi}	interim value of effective gasket diameter, [mm], Equation (25)
d_{Ge}	effective gasket diameter, [mm], Figure 2
d_3	real bolt circle diameter, [mm], Figure 1
d_{3e}	effective bolt circle diameter, [mm]
d_4	outside diameter of flange, [mm]
d_5	diameter of bolt hole, [mm], Figure 1
F_{Gmin}	minimum gasket force, [N], Equations (28), (29), (30), (31)
F_{Greal}	force on the real gasket, [N]
F_{Gequi}	force on the equivalent gasket, [N]
F_{GzoneA}	gasket force on the bolt holes zone A, [N], Equation (5), Figure 7
F_{GzoneB}	gasket force on zone B, [N], Equations (5), (6), Figure 7
F_{GzoneC}	gasket force on zone C, [N], Equations (5), (10), Figure 7
F_Q	axial fluid pressure force, [N], Equations (29), (31)
F_R	force resulting from external additional axial force and moment, [N], Equations (29), (31)
K_{seal}	ratio of effective to sealing average gasket stress, Equation (27), (30), (31)
n_B	number of bolts, Equation (11), (21), (23)
P	internal pressure, [MPa]
$Q(x)$	gasket stress evolution versus gasket radius, [MPa], Equation (2)
Q_A	minimum necessary compressive stress in gasket for assembly condition, [MPa], Equation (28), (30)
$Q_{AGe'}$	average stress on effective gasket area, [MPa], Equation (27)
$Q_{smin(L)I}$	mean effective required gasket compressive stress at load condition I , [MPa], Equations (29), (31)

- $Q_{\max,y}$ yield stress characteristic of the gasket materials and construction, [MPa], Equation (22), (26)
- Q_{seal} average stress on sealing gasket area, [MPa], Equation (27)
- x radial position defined by $Q(x = 0) = 0$, [mm], Figures 4, 5, 6
- x_{\max} elastic behaviour gasket width, [mm], Figure 10

Subscripts

- 0 Initial bolt-up condition (assembly)
- I Subsequent operating condition I

Superscripts

- el elastic behaviour of the gasket is considered
- pl plastic behaviour of the gasket is considered


4 Introduction

EN 1591-1:2001+A1:2009 and CEN/TS 1591-3 only deal with the Inside Bolt Circle (IBC) gaskets. For a Full Face (FF) gasket, the gasket reaction force application diameter is closer to the bolt circle diameter due to the gasket reaction on the outside part of the gasket.

The aim of this proposal is to give a method (based on EN 1591-1) enabling to include the full face gaskets within the scope of series EN 1591.

The method described in this document involves the following steps:

- a) Geometrical definition of a homogeneous gasket (without any hole) equivalent in terms of reaction force to the real Full Face gasket with holes:
 - 1) Partitioning of the gasket into 3 parts (internal part, bolt holes part and external part);
 - 2) determination of the outside diameter of an homogeneous gasket part equivalent (for gasket force) to the bolt hole part, having the same inside diameter, considering full elastic behaviour of the gasket (d_{G3}^{el});
 - 3) determination of the outside diameter of a homogeneous gasket part equivalent (for gasket force) to the external part, having an inside diameter of (d_{G3}^{el}) considering full elastic behaviour of the gasket (d_{G4}^{el});
 - 4) determination of the outside diameter of a homogeneous gasket equivalent (for gasket force) to the real gasket, having the same inside diameter, considering full plastic behaviour of the gasket (d_{G4}^{pl});
 - 5) determination of the outside diameter of the equivalent gasket (d_{G4}) as the maximum value of d_{G4}^{el} and (d_{G4}^{pl}) in order to maximize the gasket surface and the subsequent required bolt load.

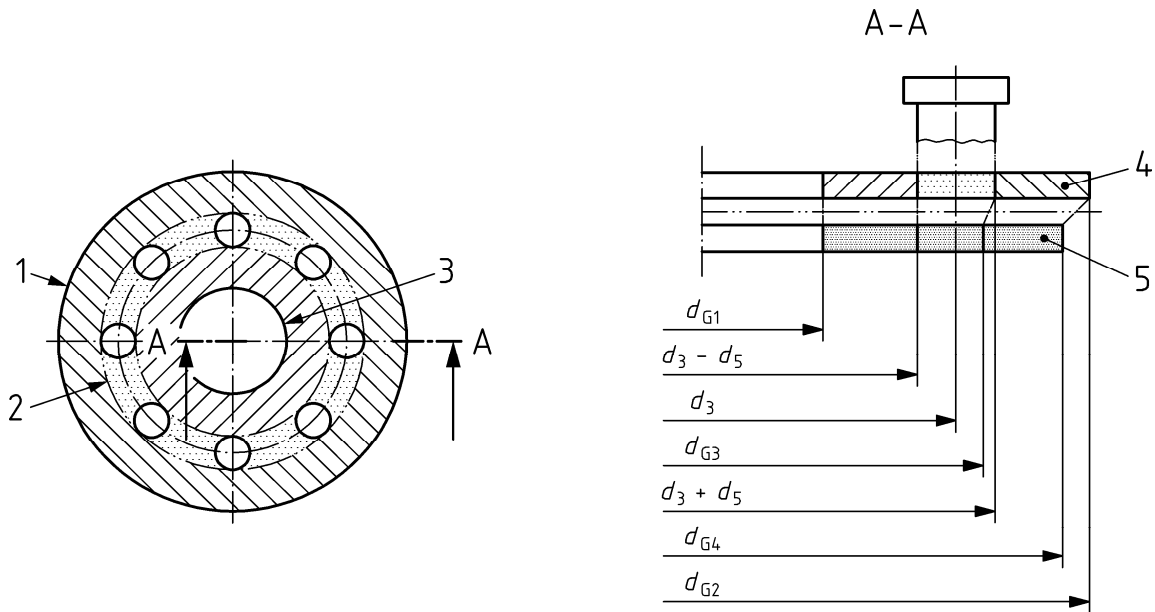

Key

- 1 external area
- 2 bolt holes area
- 3 internal area
- 4 real gasket
- 5 equivalent gasket

Figure 1 — "FULL FACE" gasket areas division and definition of the equivalent gasket

- b) Determination of the effective dimensions of the homogeneous equivalent gasket using the equations of EN 1591-1.
- c) Modification of the tightness criteria verification, in order to take into account that only a part of the effective gasket width participates to the sealing (part inside the bolt hole circle).

5 Definition of an equivalent gasket

5.1 Gasket parts identification


The gasket can be divided into three parts as shown in Figure 1:

- a) The Internal part (or sealing part) is the gasket part inside the bolt holes diameter. This part of the gasket is the part already treated in EN 1591-1 and is the part associated to the sealing behavior of the bolted flange connection;
- b) The Bolt holes part is the part of the gasket containing the holes enabling the bolt going through the gasket. The width of this part is equal to the bolt holes diameter;
- c) The External part is the part outside the bolt holes diameter (d_5).

5.2 Gasket elastic deformation

5.2.1 General

For the compressed gasket width see Figure 2.

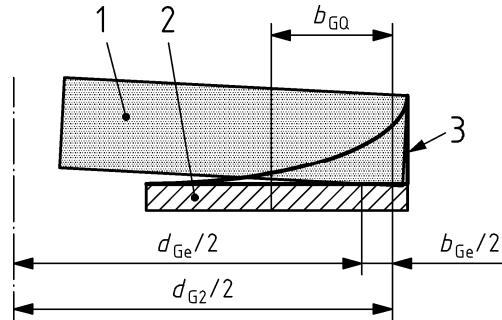

Key

- 1 flange
- 2 gasket
- 3 gasket stress distribution

Figure 2 — Compressed gasket width

5.2.2 Gasket modelling at unloading

The gasket elasticity modulus at unloading (E_G) depends on the initial gasket stress ($Q = F_{G0}/A_{Ge}$), see Figure 3. The test performed according to EN 13555 give tabulated values for E_G depending on the initial gasket stress F_{G0}/A_{Ge} . Thus the variation of E_G versus Q can be modelled by a linear relation for each interval $[Q_n, Q_{n+1}]$.

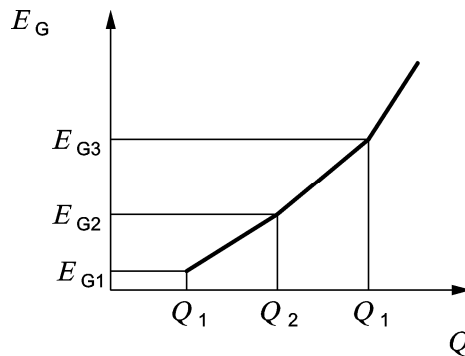


Figure 3 — Variation of E_G versus initial gasket stress Q

For $Q_n \leq Q \leq Q_{n+1}$

$$E_G(Q) = A_n \cdot Q + B_n = dQ / d\epsilon$$

$$A_n = (E_{G,n+1} - E_{G,n}) / (Q_{n+1} - Q_n)$$

$$B_n = E_n - [(E_{G,n+1} - E_{G,n}) / (Q_{n+1} - Q_n)] \cdot Q_n$$

(1)


In the case of elastic deformation, considering the flange rotation (see Figure 4), leads to the following expression of Q versus radial distance x , using the same equations as in the CR 13642, with coefficients A_n and B_n for each initial gasket stress interval $[Q_n, Q_{n+1}]$.

FprCEN/TR 1591-5:2011 (E)

For $x_n \leq x \leq x_{n+1}$ with $x_0 = 0$

$$Q(x) = k \cdot (x - x_n) \cdot B_n \cdot \left[1 + \frac{1}{2} \cdot A_n \cdot k \cdot (x - x_n) \right] + \sum_{m=0}^{n-1} k \cdot (x_{m+1} - x_m) \cdot B_m \cdot \left[1 + \frac{1}{2} \cdot A_m \cdot k \cdot (x_{m+1} - x_m) \right] \quad (2)$$

NOTE This expression of Q replaces the expression $Q(x) \approx E_0 \cdot k \cdot x \cdot (1 + \frac{1}{2} \cdot K_1 \cdot k \cdot x)$ given in document CR 13642:1999, Equation (4.4). (The value of $n = 0$, leads to CR 13642:1999, Equation (4.4)). It should be noted that the expression of EN 1591-1:2001+A1:2009, Table 1 is based upon the hypothesis of a gasket elastic modulus for unloading depending linearly of the initial gasket stress ($E_G = E_0 + K_1 \cdot Q$).

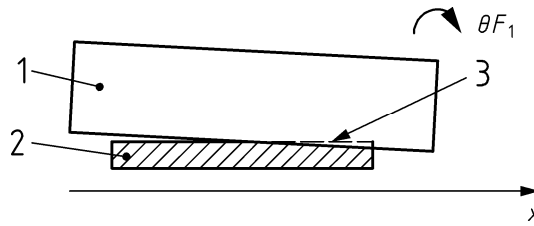


Key

- 1 flange
- 2 gasket
- 3 effective contact area due to flange rotation

Figure 4 — Flange rotation

At this step there are two possible configurations, see Figure 5 and Figure 6:

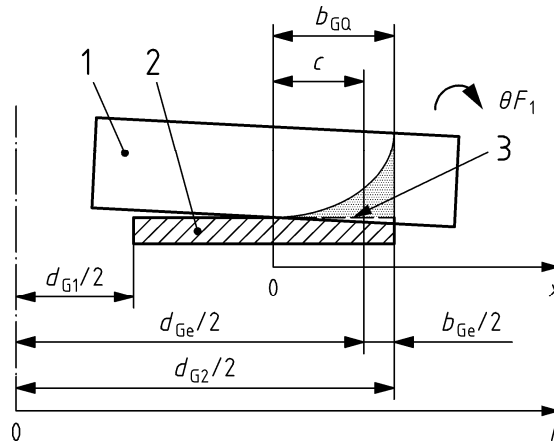

Key

- 1 flange
- 2 gasket
- 3 gasket pressure contact profile on effective contact area

Figure 5 — Case with no contact on the inside part of the gasket