

INTERNATIONAL STANDARD

ISO 12858-2

First edition
1999-10-01

Optics and optical instruments — Ancillary devices for geodetic instruments —

Part 2: Tripods

iTeh STANDARD PREVIEW
(standards.iteh.ai)

*Optique et instruments d'optique — Équipements annexes pour les
instruments géodésiques —*

Partie 2: Trépieds

ISO 12858-2:1999

<https://standards.iteh.ai/catalog/standards/sist/3b93603a-ef44-471b-a54e-52177007a933/iso-12858-2-1999>



Reference number
ISO 12858-2:1999(E)

Contents

1 Scope	1
2 Normative reference(s).....	1
3 Terms and definitions	1
4 Design	1
5 General features — Dimensions	1
6 Requirements	3
7 Tools	6
8 Designation and marking.....	6
Annex A (informative) Parallel screw threads of Whitworth form	7
Bibliography	8

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/5b95605a-c44-471b-a54c-52177007a933/iso-12858-2-1999>

© ISO 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet iso@iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 12858-2 was prepared by Technical Committee ISO/TC 172, *Optics and optical instruments*, Subcommittee SC 6, *Geodetic and surveying instruments*.

ISO 12858 consists of the following parts, under the general title *Optics and optical instruments — Ancillary devices for geodetic instruments*:

— Part 1: *Invar levelling staffs*

— Part 2: *Tripods*

iteh STANDARD PREVIEW
(standards.iteh.ai)

Annex A of this part of ISO 12858 is for information only.

[ISO 12858-2:1999](https://standards.iteh.ai/catalog/standards/sist/3b93603a-ef44-471b-a54e-52177007a933/iso-12858-2-1999)

<https://standards.iteh.ai/catalog/standards/sist/3b93603a-ef44-471b-a54e-52177007a933/iso-12858-2-1999>

Introduction

ISO 12858 consists of a series of parts which detail specifications for ancillary devices to be used with geodetic instruments in surveying. This second part specifies requirements for tripods.

Additional parts, covering further ancillary devices, may be added to ISO 12858 as the need arises.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 12858-2:1999

<https://standards.iteh.ai/catalog/standards/sist/3b93603a-ef44-471b-a54e-52177007a933/iso-12858-2-1999>

Optics and optical instruments — Ancillary devices for geodetic instruments —

Part 2: Tripods

1 Scope

This part of ISO 12858 specifies the most important requirements of telescopic tripods for surveying instruments and the connection between instrument and tripod.

The requirements in this part of ISO 12858 enable instruments and tripods of different manufacturers to be joined to one another, without prejudicing their performance and their usefulness.

This part of ISO 12858 is applicable to tripods which are used for levels, theodolites, tacheometers, GPS equipment, EDM instruments and in combination with targets, reflectors, antennae, etc.

ITeH STANDARD PREVIEW
(standards.iteh.ai)

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 12858. For dated references, subsequent amendments to, or revisions of, this publication do not apply. However, parties to agreements based on this part of ISO 12858 are encouraged to investigate the possibility of applying the most recent edition of the normative documents indicated below. For undated references, the latest edition of the normative documents referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 9849, *Optics and optical instruments — Geodetic instruments — Vocabulary*.

ISO 2768-1, *Mechanical tolerances*.

3 Terms and definitions

For the purposes of this part of ISO 12858, the terms and definitions given in ISO 9849 apply.

4 Design

Two main types of tripod with telescopic legs are used:

- Type L: for light-weight or small instruments, with flat head (LF) or spherical head (LS);
- Type H: for heavy instruments.

5 General features — Dimensions

The mechanical properties of the tripod shall comply with the values given in Table 1. The shape of the tripod and the details as shown in Figure 1 are examples for information only.

Dimensions in millimetres

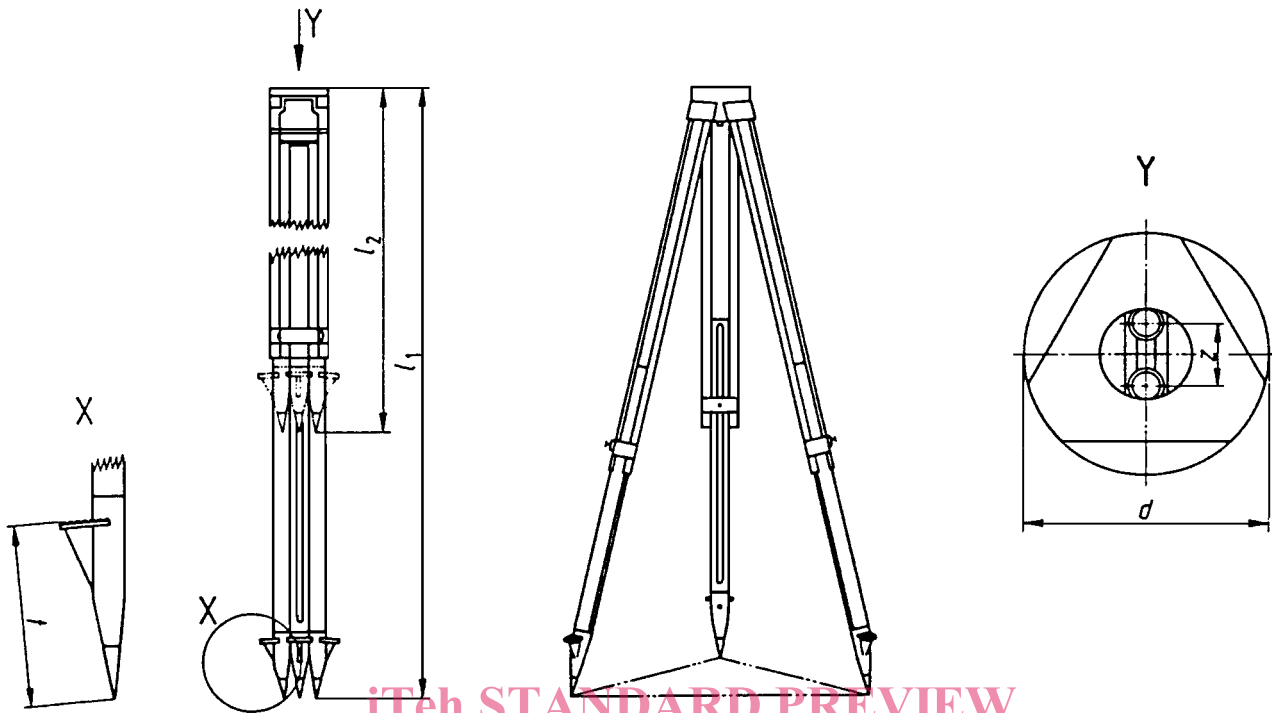


Figure 1 — Design of tripod

ISO 12858-2:1999
<https://standards.iteh.ai/catalog/standards/sist/3b93603a-ef44-471b-a54e-52177007a933/iso-12858-2-1999>

Table 1 — Mechanical properties

Parameter		Type of head		
		Flat head		Spherical head
Description	Unit	Type LF	Type H	Type LS
Design		light-weight	heavy-weight	light-weight
Mass of tripod	kg (max.)	5,5	7	5,5
Suitable for instruments weighing	kg (max.)	5	15	5
Symbol ^a in Figure 1				
l_1	mm	1700	1800	1700
l_2	mm	1200	1200	1200
d	mm	125	150	125
z	mm	25	35	25
t	mm	110	125	110

^a Where:

- l_1 is the minimum length of tripod, legs extended;
- l_2 is the maximum length of tripod, legs retracted;
- d is the minimum diameter of tripod platform;
- z is the minimum diameter of rotating piece;
- t is the minimum distance between step and point.

6 Requirements

6.1 Tripod head

An instrument set on the tripod shall be able to be rotated easily and evenly on the tripod head when the clamping screw is loosened. Additional devices fixed to the tripod head shall not hamper the ability of the tripod to be used with instruments from different manufacturers. Either flat or spherical heads may be used with the tripod.

6.2 Joints

The joints on the tripod legs shall be designed in such a way that the tripod can be set up quickly. The friction of the joints shall be adjustable.

6.3 Clamping screw

The clamping screw shall be provided with a 5/8 in (inch) bolt thread and the instrument base plate with a 5/8 in nut thread. The clamping screw shall be securely fixed to the tripod head such that the centring of the instrument shall not be hindered. The clamping screw shall be hollow with an internal diameter of at least 8 mm, in order that optical centring devices can be used. The suspension point of a plumb line or solid plumb shall be arranged in such a way that a centring accuracy of 2 mm is ensured.

The dimensions given in Figure 2 and Table 2 (for flat heads) and in Figure 3 and Table 3 (for spherical heads) respectively shall be observed.

6.4 Tripod legs

For tripods with wooden legs, the wood-metal connections shall be sufficiently adjustable so that even after shrinkage the fittings sit firmly.

6.5 Tripod shoes

The tripod shoes shall be provided with a step. The tips of the tripod shoes shall be made of unhardened steel.

iTeh STANDARD PREVIEW


(standards.iteh.ai)

ISO 12858-2:1999

[https://standards.iteh.ai/catalog/standards/sist/3b93603a-e444-471b-a54e-](https://standards.iteh.ai/catalog/standards/sist/3b93603a-e444-471b-a54e-52177097a933/iso-12858-2-1999)


[52177097a933/iso-12858-2-1999](https://standards.iteh.ai/catalog/standards/sist/3b93603a-e444-471b-a54e-52177097a933/iso-12858-2-1999)

Dimensions in millimetres

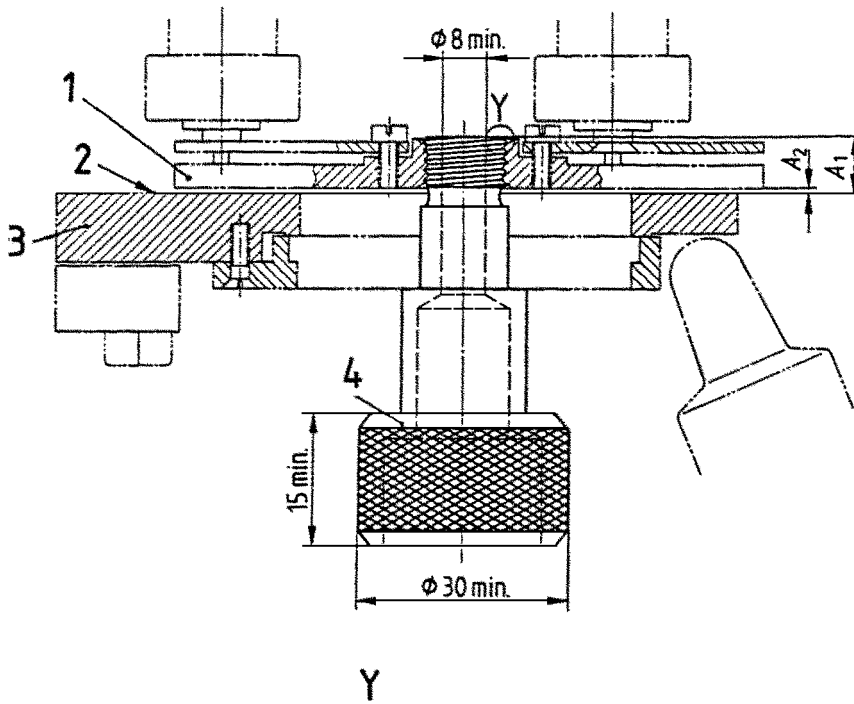

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 12858-2:1999
<https://standards.iteh.ai/catalog/standards/iso/12858-2-1999/93603a-ef44-471b-a54e-52177007a972>



Key

- 1 Baseplate
- 2 Level contact surface
- 3 Tripod headplate
- 4 Clamping screw
- 5 External screw thread (number of threads 11 to 25,4)

Mechanical tolerances shall be ISO 2768-1-m.

NOTE See annex A for dimensions D/d , D_1/d_1 and D_2/d_2 .


Figure 2 — Connection between instrument and tripod with flat head

Table 2 — Limits of dimensions A_1 and A_2 for tripods with flat head


Dimensions in millimetres

Size	A_1	A_2
Maximum	14	3
Minimum	8	0,5

Dimensions in millimetres

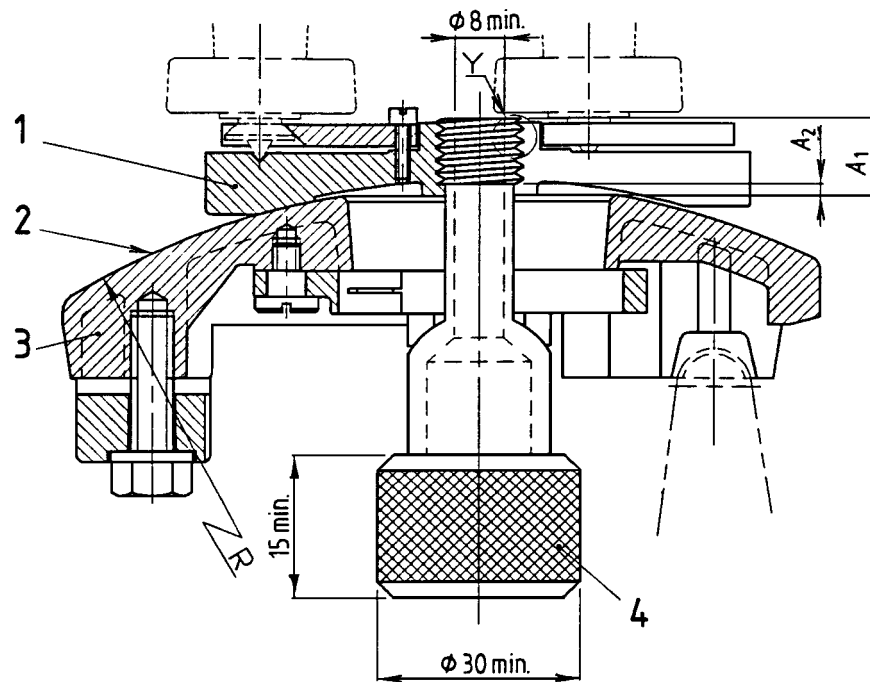

iTeh STANDARD PREVIEW
(standards.iteh.ai)

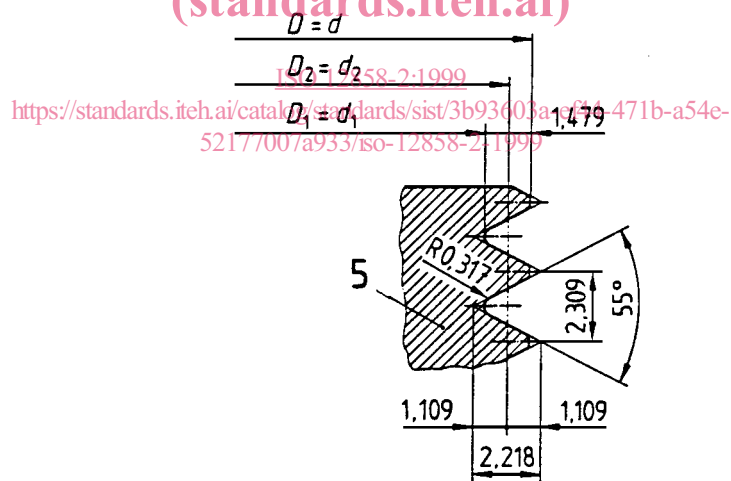

Key

- 1 Baseplate
- 2 Level contact surface
- 3 Tripod headplate
- 4 Clamping screw
- 5 External screw thread (number of threads 11 to 25,4)

Mechanical tolerances shall be ISO 2768-1-m.

NOTE See annex A for dimensions D/d , D_1/d_1 and D_2/d_2 .

Figure 3 — Connection between instrument and tripod with spherical head

Table 3 — Limits of dimensions A_1 and A_2 for tripods with spherical head

Dimensions in millimetres

Size	A_1	A_2
Maximum	14	3
Minimum	8	0,5