

# INTERNATIONAL STANDARD

**ISO/IEC**  
**9040**

Second edition  
1997-06-15

---

---

## Information technology — Open Systems Interconnection — Virtual Terminal Basic Class Service

iTeh STANDARD PREVIEW

*Technologies de l'information — Interconnexion de systèmes ouverts  
(OSI) — Service de classe de base de terminal virtuel*

ISO/IEC 9040:1997

<https://standards.iteh.ai/catalog/standards/sist/9ca680af-4381-4b2a-a521-56433f1cad5f/iso-iec-9040-1997>



Reference number  
ISO/IEC 9040:1997(E)

## Contents

<b>1 Scope</b>	<b>1</b>
<b>2 Normative references</b>	<b>1</b>
<b>3 Definitions</b>	<b>2</b>
3.1 Global OSI definitions	2
3.2 Association Control Service Element definitions	2
3.3 Virtual Terminal Service definitions	2
<b>4 Abbreviations</b>	<b>5</b>
4.1 General	5
4.2 Modes of operation	5
4.3 VTE model components	5
4.4 Access-rules	6
<b>5 Conventions</b>	<b>6</b>
<b>6 General features</b>	<b>6</b>
6.1 Introduction	6
6.2 Features of the Virtual Terminal Basic Class Service	6
6.3 VT Environment (VTE) and VTE-parameters	7
6.4 Virtual Terminal Environment Profiles	7
6.5 Dialogue Control	7
<b>7 Communication facilities</b>	<b>7</b>
7.1 Establishment facility	7
7.2 Termination facility	7
7.3 Negotiation facility	7
7.4 Data Transfer facility	7
7.5 Delivery Control facility	7
7.6 Dialogue Management facility	7
7.7 Interrupt facilities	7
7.8 Exception Reporting facility	7

© ISO/IEC 1997

All rights reserved. Unless otherwise specified no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

<b>8 Modes of operation</b>	<b>8</b>
8.1 S-mode	8
8.2 A-mode	8
<b>9 Access-rules</b>	<b>8</b>
<b>10 VT functional units</b>	<b>9</b>
10.1 Negotiation functional units	9
10.2 Negotiated Release functional unit	10
10.3 Urgent Data functional unit	10
10.4 Break functional unit	10
10.5 Enhanced Access-rules functional unit	10
10.6 Structured Control Objects functional unit	10
10.7 Blocks functional unit	10
10.8 Fields functional unit	10
10.9 Reference Information Objects functional unit	10
10.10 Ripple functional unit	10
10.11 Exceptions functional unit	10
10.12 Context Retention functional unit	11
<b>11 VT Environment Profiles (VTE-profiles)</b>	<b>11</b>
<b>12 The VTE Model</b>	<b>11</b>
<b>13 Display Objects</b>	<b>12</b>
13.1 Structure	12
13.2 Attributes	16
<b>14 Control objects</b>	<b>16</b>
14.1 CO structure facilities and related restrictions	17
14.2 Standard control objects for fields and controlled data entry	17
14.3 Standard control object for dynamic termination conditions	18
14.4 Standard control object for notifying termination	18
14.5 Standard control object for echo control	18
14.6 Standard control object for ripple mode editing	18
<b>15 Reference Information Objects</b>	<b>18</b>
15.1 Structure	18
15.2 Generation and use of RIOs	18
<b>16 Device objects</b>	<b>19</b>
<b>17 VTE Parameters and directed graph</b>	<b>19</b>
17.1 Directed graph of VTE-parameters	19
17.2 VTE consistency rules	19
<b>18 Display Object VTE-parameters</b>	<b>22</b>
18.1 Primary VTE-parameters	22
18.2 Secondary VTE-parameters	22
18.3 Tertiary VTE-parameter	25
<b>19 Operations on display objects</b>	<b>26</b>
19.1 Addressing operations	26
19.2 Ripple operations	30
19.3 Logical ripple operations	31
19.4 Update operations	31
19.5 Access control over display object	38

<b>20 Control object VTE-parameters</b>	<b>39</b>
20.1 Usage and effects of control object VTE-parameters	40
20.2 Usage and effects of data element VTE-parameters	41
20.3 Standard control objects	41
<b>21 Reference Information Object VTE-parameters</b>	<b>46</b>
21.1 Availability	46
21.2 VTE-parameters for RIOs	46
<b>22 Operations on RIOs</b>	<b>47</b>
22.1 Availability	47
22.2 Identification of RIO and RIO records	47
22.3 RIO update operations	47
22.4 RIO reference operations	47
<b>23 Device object VTE-parameters</b>	<b>48</b>
23.1 Default control object VTE-parameters	48
23.2 Minimum Length VTE-parameters	48
23.3 Device object VTE-parameters for Attributes	48
23.4 Termination VTE-parameters	49
23.5 Interaction between use of TCCO or FDCO and device object VTE-parameters	50
<b>24 Delivery control, synchronisation and net-effecting</b>	<b>50</b>
24.1 No delivery-control	50
24.2 Simple delivery-control	51
24.3 Quarantine delivery-control	51
24.4 Implicit delivery	51
24.5 Update queues and priority handling	51
<b>25 Communication Model</b>	<b>53</b>
<b>26 VT Services</b>	<b>53</b>
<b>27 VT service sequences</b>	<b>55</b>
27.1 Phases	55
27.2 Phase transitions	55
27.3 Ownership of the WAVAR access-right	56
27.4 Availability and usage conditions of VT services	56
27.5 Service collisions in A-mode	57
<b>28 Establishment facility</b>	<b>57</b>
28.1 VT-ASSOCIATE service	57
<b>29 Termination facility</b>	<b>60</b>
29.1 Services	60
29.2 VT-RELEASE service	60
29.3 VT-U-ABORT service	60
29.4 VT-P-ABORT service	61
<b>30 Negotiation facilities</b>	<b>61</b>
30.1 Switch Profile negotiation	61
30.2 Multiple interaction negotiation	62
30.3 Sequence control for multiple interaction negotiation	65
<b>31 Data Transfer facility</b>	<b>66</b>
31.1 VT-DATA service	66

<b>32 Delivery Control facility</b>	<b>67</b>
32.1 VT-DELIVER service	67
32.2 VT-ACK-RECEIPT service	68
<b>33 Dialogue Management facility</b>	<b>68</b>
33.1 VT-GIVE-TOKENS service	68
33.2 VT-REQUEST-TOKENS service	68
<b>34 Destructive Interrupt facility</b>	<b>68</b>
34.1 VT-BREAK service	68
<b>35 Exception reporting facility</b>	<b>69</b>
35.1 VT-P-EXCEPTION service	69
<b>Annex A Default VTE-profiles</b>	<b>71</b>
A.1 Introduction to VTE-profile definitions	71
A.2 Notation for definition of VTE-profiles	71
A.3 S-mode Default VTE-profile, vt-b-spr-sd	72
A.4 A-mode Default VTE-profile, vt-b-spr-ad	72
<b>Annex B Explanatory notes</b>	<b>74</b>
B.1 Types of VT communication supported	74
B.2 Aid to understanding the role of display objects	74
B.3 Relation of update-window to buffering	74
B.4 Control object semantics	74
B.5 Echoing	74
B.6 Echo control	74
B.7 Echo control algorithm	75
B.8 Termination conditions	75
B.9 Synchronisation of update delivery	75
B.10 Multiple Interaction Negotiation	76
B.11 Semantics of display objects	76
B.12 Repertoires	76
B.13 Use of ISO 6429 Additional Controls in repertoires	76
B.14 Font Assignment VTE-parameters	77
B.15 Net-effecting	77
B.16 Interrupt facilities	77
B.17 Emphasis attribute	77
B.18 Supplementary explanatory material on field facilities	79
B.19 Supplementary explanatory material on block facilities	83
<b>Annex C ASN.1 OBJECT IDENTIFIER values</b>	<b>85</b>
C.1 For identification of this International Standard	85
C.2 For identification of attribute assignment types	85
<b>Annex D Size of urgent control objects</b>	<b>86</b>

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO and IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75% of the national bodies casting a vote.

International Standard ISO/IEC 9040 was prepared by Joint Technical Committee ISO/IEC JTC1, *Information technology*, Subcommittee SC21, *Open systems interconnection, data management and open distributed processing*.

This second edition cancels and replaces the first edition (ISO 9040:1990), which has been technically revised. It also incorporates Amendment 2:1992, Technical Corrigendum 1:1991, Technical Corrigendum 2:1992 and Technical Corrigendum 3:1993.

Annexes A and C form an integral part of this International Standard. Annexes B and D are for information only.

## Introduction

This International Standard is one of a set of standards produced to facilitate the interconnection of computer systems. It is related to other International Standards in the set as defined in the Reference Model for Open Systems Interconnection (ISO/IEC 7498-1). The Reference Model subdivides the area of standardization into a series of layers of specification, each of manageable size.

The purpose of this International Standard (ISO/IEC 9040) is to define the service provided in the Application Layer by the Virtual Terminal (VT) Basic Class Service.

The Virtual Terminal Basic Class Service is provided by the Virtual Terminal Basic Class Protocol specified in ISO/IEC 9041 and making use of services available from the Association Control Service Element (ACSE) in the Application Layer and the Presentation Service.

ISO/IEC 9040:1997

<https://standards.iteh.ai/catalog/standards/sist/9ca680af-4381-4b2a-a521-56433f1cad5f/iso-iec-9040-1997>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

This page intentionally left blank

ISO/IEC 9040:1997

<https://standards.iteh.ai/catalog/standards/sist/9ca680af-4381-4b2a-a521-56433f1cad5f/iso-iec-9040-1997>



# Information technology – Open Systems Interconnection – Virtual Terminal Basic Class Service


## 1 Scope

This International Standard defines, in an abstract way, the externally visible Basic Class Virtual Terminal Service within the OSI Application Layer in terms of

- a model defining the interaction between users of the service;
- the primitive actions and events of the service;
- the parameter data associated with each primitive action and event;
- the relationship between, and the valid sequences of, these actions and events.

The service defined in this International Standard is that which is provided by the OSI Basic Class Virtual Terminal Protocol (in conjunction with the Association Control Service Element and the Presentation Service) and which may be used by any user including other Application Service Elements. The relationship between the standards for Virtual Terminal Service, Virtual Terminal Protocol, ACSE, Presentation Layer Service and the user of the Virtual Terminal Service is shown in figure 1.

This International Standard also defines two standard default virtual terminal environment profiles and describes the form of registered virtual terminal environment profiles and control objects. Virtual terminal environment profiles define sets of virtual terminal environment parameters for use in the establishment of virtual terminal associations and subsequent negotiation. This International Standard also defines a structure

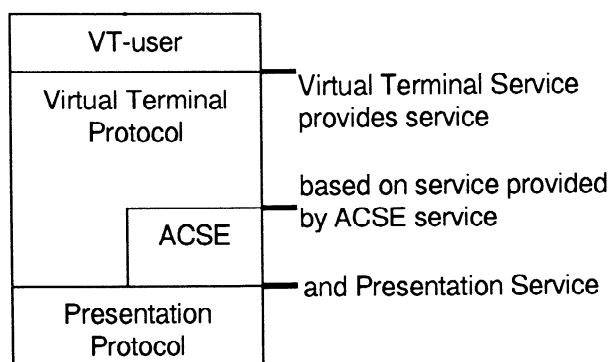

**Figure 1 - Relationship of this International Standard to other OSI Application Layer Standards**

of ASN.1 Object Identifiers for the objects defined in this International Standard and for use in a register of virtual terminal objects.

This International Standard does not specify individual implementations or products, nor does it constrain the implementation of entities and interfaces within a computer system. There is, therefore, no requirement for conformance to this International Standard.

This International Standard applies to interactive applications requiring terminal oriented communication expressed in terms of the transmission and manipulation of graphical images having the following characteristics:

- the images are composed of character-box graphic elements organised into a one, two or three dimensional structure;
- attributes may be associated with any graphic element to qualify its mode of display.

Control information for the communication can be modelled using virtual terminal control objects, and multiple devices can be modelled using virtual terminal device objects linked to the other virtual terminal objects.

## 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO/IEC 646:1991, *Information technology – ISO 7-bit coded character set for information interchange*.

ISO/IEC 2022:1994, *Information technology – Character code structure and extension techniques*.

ISO/IEC 2375:1985, *Data processing – Procedure for registration of escape sequences*.

ISO/IEC 6429:1992, *Information technology – Control functions for coded character sets*.

ISO/IEC 7498-1:1994, *Information technology – Open Systems Interconnection – Basic Reference Model : The Basic Model*.

ISO/IEC 8649:1996, *Information technology – Open Systems Interconnection – Service definition for Association Control Service Element*.

ISO/IEC 8824:1990, *Information technology – Open Systems Interconnection – Specification for Abstract Syntax Notation One (ASN.1)*.

ISO/IEC 8825:1990, *Information technology – Open Systems Interconnection – Specification of Basic Encoding Rules for Abstract Syntax Notation One (ASN.1)*.

ISO/IEC 9041-1:1997, *Information technology – Open Systems Interconnection – Virtual Terminal Basic Class Protocol – Part 1: Specification*.

ISO/IEC 9834-4:1991, *Information technology – Open Systems Interconnection – Procedures for the operation of OSI Registration Authorities – Part 4: Register of VTE Profiles*

ISO/IEC 9834-5:1991, *Information technology – Open Systems Interconnection – Procedures for the operation of OSI Registration Authorities – Part 5: Register of VT Control Object Definitions*

ISO/IEC 10731:1994, *Information technology – Open Systems Interconnection – Basic Reference Model – Conventions for the Definition of OSI Services*.

The International Register of Coded Character Sets to be used with Escape Sequences.<sup>1)</sup>

## 3 Definitions

### 3.1 Global OSI definitions

This International Standard is based on the concepts developed in ISO/IEC 7498-1 and makes use of the following terms defined in it:

- a) application entity;
- b) Application Layer;
- c) service data unit;
- d) service access point.

It also makes use of the following terms defined in ISO/IEC 10731:

- e) service primitive;
- f) service provider;
- g) primitive;
- h) request (primitive);
- i) indication (primitive);
- j) response (primitive);

- k) confirm (primitive);
- l) confirmed service;
- m) non-confirmed service;
- n) provider-initiated service.

### 3.2 Association Control Service Element definitions

This International Standard makes use of the following terms defined in ISO/IEC 8649:

- a) application association;
- b) application entity title;
- c) application control service element (ACSE).

### 3.3 Virtual Terminal Service definitions

For the purposes of this International Standard, the following definitions apply:

**3.3.1 VT-user:** A user of the Virtual Terminal Service.

**3.3.2 Application VT-user:** The unique VT-user which can update the FDCO; if either VT-user can update this control object then neither VT-user has this designation.

**3.3.3 Terminal VT-user:** If one VT-user has the designation Application VT-user then the peer VT-user has the designation Terminal VT-user.

**3.3.4 character-repertoire:** A set of objects which can be represented by primary attribute values; one such object, represented by its primary attribute value, can occupy an array element in a display object when the character-repertoire is in use for that array element. A control object of character-string category also has an associated repertoire.

**3.3.5 character-box graphic element:** An atomic element of a character-repertoire where use of the repertoire has been agreed through negotiation by the VT-users.

**3.3.6 primary attribute:** The attribute of an array element of a display object which is a coded representation of the character-box graphic element assigned to that array element.

**3.3.7 secondary attribute:** The secondary attributes of an array element comprise the character-repertoire, see 3.3.4, and the rendition attributes.

**3.3.8 rendition attributes:** Those secondary attributes of an array element which qualify the character-box graphic element and provide information specifying how it is intended to be presented.

**3.3.9 explicit modal default:** The value for a secondary attribute, defined in a VTE, which is used by the text operation to update an array element if no other value is provided or already present; may also be used by the erase operation.

1) Available from the European Computer Manufacturers Association (ECMA), 114 rue du Rhône, CH-1204 Genève, Switzerland.

**3.3.10 display object:** An abstract object, defined in this International Standard, for modelling the exchange of graphic information. It consists of a number of components, see 13.1.

**3.3.11 array element:** That part of a display object which can hold one character-box graphic element including its primary and secondary attribute values.

**3.3.12 primitive display pointer:** A set of one to three coordinate values which identify a particular element in a display object.

**3.3.13 extended display pointer:** A set of two to four coordinate values which identify a particular array element in a block defined on a display object.

**3.3.14 display pointer:** Used to refer to either the primitive display pointer or the extended display pointer; whether or not blocks are in use determines which is implied.

**3.3.15 logical pointer:** A set of two or three coordinate values which identify a particular array element in a field defined on a display object.

NOTE – The primitive display pointer and extended display pointer do not both exist simultaneously. However, when a logical pointer exists, it is in addition to either a display pointer or an extended display pointer.

**3.3.16 control object:** An abstract object, of a type defined in generic terms in this International Standard, for modelling the exchange of unstructured information.

NOTE – The primary application of a control object is for modelling the exchange of information of a control nature, as understood by the VT-users; the VT Service does not constrain the interpretation of this information.

**3.3.17 device object:** An abstract object used to model certain logical characteristics of real devices, and to link the various objects of a virtual terminal environment together and/or to real devices.

**3.3.18 object updating device:** A real device capable of generating values which (possibly after undergoing a transformation) are used by one of the peer VT-users to update either a display object or control object (or possibly both).

**3.3.19 VT-association:** An application association between two peer VT-users.

**3.3.20 VT-environment (VTE):** A set of parameters that together define the data structuring and operational characteristics for a particular VT-association. The VTE exists only during the lifetime of that VT-association. The parameters of the set are mutually related by a directed graph structure. The VTE may be modified during the existence of the VT-association by negotiation.

**3.3.21 current-VTE:** The single VTE which exists during the Data Handling phase or the Negotiation Quiescent phase; in the Data Handling phase it is a full-VTE whereas in the Negotiation Quiescent phase it is not a full-VTE.

**3.3.22 draft-VTE:** The VTE, if any, under negotiation. During negotiation, the draft-VTE is not necessarily a full-VTE.

**3.3.23 VTE-parameter:** An individual parameter of a VTE. Each VTE-parameter is given a unique name in the service which is used as the identifier for the VTE-parameter.

**3.3.24 full-VTE:** A VTE that is a complete directed graph of VTE-parameters in which all node parameters and terminal leaf parameters implied by all existing nodes from the root of the tree have values.

**3.3.25 VT-context-value:** A collective term for the set of object instances, their assigned values and the current-VTE for a particular VT-association. A VT-context-value exists only during the lifetime of the VT-association and is normally changing continuously during this time interval.

**3.3.26 reset-context:** The VT-context-value which will result after a VT-BREAK service. This context value is the context after the last successful current-VTE establishment; all objects will have their initial values. If no full-VTE has been established, there is no reset-context.

**3.3.27 WAVAR access-right:** An access-right which can be held by at most one VT-user at any time. It is used to ensure that control and display objects cannot be updated by both VT-users simultaneously.

**3.3.28 access-rule:** A characteristic defined for an object in a VTE which determines which VT-users can update the object at a particular time.

**3.3.29 net-effecting:** The conversion of a sequence of items, representing the content of one or more update operations (see 24.3), into a different, usually shorter sequence, which results in the same final states of the objects being updated.

**3.3.30 concatenation:** The connection of a sequence of queued update items (see 24.3) to form a single, new, queued update item.

**3.3.31 segmentation:** The division of a single, queued update item (see 24.3) into a sequence of new, queued update items.

**3.3.32 A-mode (Asynchronous mode):** A mode of operation using two display objects, one of which is updatable by the VT-user which initiated the VT-association and the other by the peer VT-user.

**3.3.33 S-mode (Synchronous mode):** A mode of operation using one two-way-alternate dialogue supporting one display object; at any time, the display object may only be updated by the single VT-user which owns the WAVAR access-right.

**3.3.34 service:** A distinct part of the total VT Service that is composed of a sequence of primitives taken from the set {request primitive, indication primitive, response primitive, confirm primitive}.

**3.3.35 sequenced service:** A Service for which an indication (or confirm) primitive resulting from a corresponding request (or response) primitive is initiated in sequence with all previously initiated sequenced indications (or confirms) and their corresponding requests (or responses).

**3.3.36 non-sequenced service:** A Service for which an indication (or confirm) primitive resulting from a corresponding request (or response) primitive is not necessarily initiated in sequence with all previously initiated indications (or confirmations) and their corresponding requests (or responses).

**3.3.37 conditionally sequenced service:** A Service for which

- a) certain values for parameters of the service primitives result in sequenced operation, and
- b) other values for parameters of the service primitives result in non-sequenced operation.

**3.3.38 destructive service:** A service that may cause the loss of information conveyed in previously initiated services without notification of this loss to either VT-user. Only non-sequenced services may be destructive, but not all non-sequenced services are destructive.

**3.3.39 non-destructive service:** A service that does not cause the loss of information conveyed in previously initiated services without notification to the VT-users.

**3.3.40 service parameter:** A parameter defined as part of a primitive within a VT service.

**3.3.41 update-window:** A mechanism associated with display object addressing which defines a range of coordinate values for an array below which an update operation cannot be performed. The absolute coordinate values in the range may increase in value during operation, but cannot decrease.

**3.3.42 update-window-size:** A positive, non-zero integer that defines the number of contiguous array elements within an update-window.

**3.3.43 trigger:** Where a control object has the trigger characteristic, any update to that control object causes delivery of queued updates and, in S-mode, transfers the WAVAR access-right to the peer VT-user.

**3.3.44 VTE-profile:** A pre-defined set of VTE-parameter values making up a VTE.

NOTE – Some VTE-profiles are parameterised such that values for profile arguments must be supplied by the VT-users.

**3.3.45 default VTE-profile:** A VTE-profile, defined in annex A, that is used to establish a VTE in the absence of a VT-user specified VTE-profile at VT-association establishment.

**3.3.46 registered VTE-profile:** A VTE-profile registered in a register of VT Objects administered by a Registration Authority established as defined in ISO/IEC 9834-4. It has assigned to it a unique ASN.1 OBJECT IDENTIFIER value.

**3.3.47 registered control object:** A control object registered in a register of VT Objects administered by a Registration Authority established as defined in ISO/IEC 9834-5. It has assigned to it a unique ASN.1 OBJECT IDENTIFIER value.

**3.3.48 privately defined VTE-profile:** A VTE-profile whose use has been agreed privately by means outside the scope of this International Standard; it is neither a default VTE-profile nor a registered VTE-profile.

**3.3.49 VTE-profile argument:** An argument of a parameterised VTE-profile which must be given a value to enable a full-VTE to be made from the VTE-profile. It can be a normal VTE-profile argument or a special VTE-profile argument. Each registered VTE-profile defines the applicable arguments and their semantics.

**3.3.50 normal VTE-profile argument:** A VTE-profile argument which corresponds exactly to a VTE-parameter and assumes the same identifier. A VTE-profile may also specify that other VTE-parameters are also defined by the value of such an argument.

**3.3.51 special VTE-profile argument:** A VTE-profile argument which does not correspond to a VTE-parameter (i.e., is not from the directed graph and has no standard identifier) but has a valid use as defined in the VTE-profile definition.

**3.3.52 multiple interaction negotiation (MIN):** A process which enables a draft-VTE to be modified or extended in stages to create a new full-VTE acceptable to the service provider and both VT-users.

**3.3.53 MIN-initiator:** The VT-user that initiated the VT-START-NEG service which was successful in causing the transition to Negotiation Active phase.

**3.3.54 MIN-acceptor:** The VT-user that accepted the VT-START-NEG service which was successful in causing the transition to Negotiation Active phase.

**3.3.55 block:** A structure element of the display object. A block is a rectangular area which supports relative addressing (relative to the origin of the block) for a sub-area within a Y-array.

**3.3.56 field:** A structure element of the display object. A field provides one-dimensional logical addressing over a designated subset of the array elements of a Y-array of a display object.

**3.3.57 field-element:** A rectangular area of a Y-array of a display object forming part of a field.

**3.3.58 Field Definition Control Object (FDCO):** A type of control object which holds the definition of fields for a display object as Field Definition Records.

**3.3.59 Field Definition Record (FDR):** Holds the status and definition of one field.

**3.3.60 Field Entry Instruction Control Object (FEICO):** A type of control object which holds data entry instructions as Field Entry Instruction Records.

**3.3.61 Field Entry Pilot Control Object (FEPICO):** A type of control object which holds data entry pilots as Field Entry Pilot Records.

**3.3.62 Field Entry Instruction Record (FEIR):** Holds a set of data entry rules as Field Entry Instructions (FEIs).

**3.3.63 Field Entry Pilot Record (FEPR):** Holds a data entry pilot consisting of field entry event, field entry conditions and a sequence of field entry reactions.



**3.3.64 Field Entry Instruction (FEI):** Applies a rule for controlled data entry into a field.

**3.3.65 Field Entry Event (FEE):** An event which may occur during controlled data entry and cause an entry reaction.

**3.3.66 Field Entry Condition (FEC):** A condition of the data entry which taken with an entry event predicates an entry reaction.

**3.3.67 Field Entry Reaction (FER):** A reaction to an entry event and entry condition defined in terms of operations on other objects in the virtual terminal service.

**3.3.68 Transmission Policy Control Object (TPCO):** A type of control object which holds variable values which determine how field contents are transmitted after a controlled data entry.

**3.3.69 Context Control Object (CCO):** A type of control object which provides the local context of the VT-user at certain stages of the data entry dialogue.

**3.3.70 Reference Information Object (RIO):** A container for information, separate from any display object, which can be referred to during a communication.

**3.3.71 Termination Conditions Control Object (TCCO):** A type of control object which holds termination conditions effective on the operation of one or more device objects linked to it.

**3.3.72 termination-event:** A locally defined atomic event related to input from an object updating device (for example, entering a character, pressing a function key, setting a flag) which the VT-users agree (through negotiation) to designate as causing input data to be delivered to the peer VT-user.

**3.3.73 ripple:** Ripple is a mechanism whereby the contents of array elements of the Display Object may be moved into adjacent array elements without the need of reconveying the contents from one VT-user to the other.

**3.3.74 Ripple Mode Control Object (RMCO):** a type of control object associated with the ripple mechanism which controls the operation of the ripple, for example, the extent of the ripple.

**3.3.75 ripple-extent:** A ripple-extent is that part of a DO within which the ripple mechanism operates.

**3.3.76 copy buffer:** A copy buffer stores the content and structure of an extent of the Display Object to allow subsequent transfer of this structure and content to some other extent of the DO.

**3.3.77 extended-y-array:** The set of array elements which are within the currently defined blocks of a particular y-array.

**3.3.78 extended-z-array:** The set of array elements which are within the currently defined blocks of some y-array of the z-array.

**3.3.79 filling:** Is the operation which defines the values of the primary and secondary attributes of character box elements which are left undefined as the result of ripple operations.

**3.3.80 ripple coordinate:** Determines the coordinate direction of the ripple, i.e., the coordinate which is altered as the result of ripple operations, and hence determines the unit of ripple. It takes a value from the set ("x", "y", "z", "k").

**3.3.81 ripple direction:** Specifies whether units are to be moved in a forward (increasing coordinate) or a backward (decreasing coordinate) direction, in a ripple operation.

**3.3.82 unit of ripple:** Determines the units which the ripple operations work upon. It takes a value from the set ("array element", "x-array", "y-array").

## 4 Abbreviations

### 4.1 General

ACSE	Association Control Service Element
ASN.1	Abstract Syntax Notation One
BNF	Backus-Naur Form
ECMA	European Computer Manufacturers Association
IRV	International Reference Version (of ISO/IEC 646)
IEC	International Electrotechnical Commission
ISO	International Organization for Standardization
MIN	Multiple Interaction Negotiation
OSI	Open Systems Interconnection
QOS	Quality of Service
VT	Virtual Terminal
VTE	Virtual Terminal Environment

### 4.2 Modes of operation

A-Mode	Asynchronous Mode
S-Mode	Synchronous Mode

### 4.3 VTE model components

ACS	Access Control Store
CCA	Conceptual Communication Area
CCO	Context Control Object
CDS	Conceptual Data Store
CO	Control Object
CSS	Control, Signal and Status store
DSD	Data Structure Definition
DO	Display Object
ECO	Echo Control Object
FDCO	Field Definition Control Object
FDR	Field Definition Record
FEC	Field Entry Condition
FEE	Field Entry Event
FEI	Field Entry Instruction
FEICO	Field Entry Instruction Control Object
FEIR	Field Entry Instruction Record

FEPCO	Field Entry Pilot Control Object
FEPR	Field Entry Pilot Record
FER	Field Entry Reaction
RIO	Reference Information Object
RMCO	Ripple Mode Control Object
TCCO	Termination Conditions Control Object
TCO	Termination Control Object
TPCO	Transmission Policy Control Object

#### 4.4 Access-rules

NSAC	Not Subject to Access Control
WACA	Write Access Connection (VT-association) Acceptor
WACI	Write Access Connection (VT-association) Initiator
WAVAR	Write Access VARiable

### 5 Conventions

This International Standard uses the descriptive conventions contained in the ISO/IEC Service Conventions (ISO/IEC 10731).

Additional conventions used are

- a) a character string enclosed in angle brackets, i.e. <xxx>, denotes the equivalent ISO/IEC 646 mnemonic;
- b) a character string of the form n...N, where n is usually 0 or 1, denotes the set of integers greater than or equal to n, i.e., no limit is defined in this International Standard;
- c) an informal notation analogous to ASN.1 is used in places, with apparently similar terms; where exact ASN.1 notation or terminology is intended, the usage will be introduced by reference to ASN.1;
- d) a syntax derived from Backus-Naur Form (BNF) is used for VTE-profile definitions; this is explained in annex A.

### 6 General features

Clauses 6 and 7 give an Overview of the Virtual Terminal Service defined in this International Standard.

#### 6.1 Introduction

The Basic Class Virtual Terminal Service supports the interactive transfer and manipulation of graphic data by VT-users. This graphic data is structured in a manner which models the class of character-box oriented terminals. The basic structuring of graphic elements is limited to images consisting of character-box graphic elements arranged in a one, two or three dimensional array. Optional functional units provide additional structuring capabilities. Two modes of operation are defined for Basic Class, S-mode and A-mode.

#### 6.2 Features of the Virtual Terminal Basic Class Service

The Virtual Terminal Basic Class Service offers the following services to the VT-user:

- a) the means to establish a VT-association between two peer VT-users for the purpose of enabling virtual terminal information exchange;
- b) the means to negotiate the VT functional units required;
- c) the means to negotiate a consistent set of VTE-parameters;
- d) the means to transfer and manipulate structured data in a way that is independent of the local representation of information used by each VT-user and that is independent of the way in which supporting communications media are used;
- e) the means to control the integrity of the communication;
- f) the means to terminate the VT-association either unilaterally or by mutual agreement;
- g) the means to support either synchronous (S-mode) or asynchronous (A-mode) operation between the VT-users;
- h) the means to exchange priority information to gain the immediate attention of a VT-user;
- i) the means to terminate information transfer destructively and resynchronize the activity of the VT provider;
- j) a facility for defining blocks in a display object [Blocks functional unit];
- k) a facility for defining fields in a display object [Fields functional unit, also uses feature in n)];
- l) additional optional access-rules for control objects in S-mode [Enhanced Access-rules functional unit];
- m) means to control the asymmetry inherent in typical use of these features [uses the feature in l)];
- n) a facility for defining control objects with content consisting of multiple data elements or a single partially-updateable structured data element [Structured Control Objects functional unit];
- o) a facility for controlling data entry to fields using new standard types of control object [uses the feature in n)];
- p) a facility for storing and using update information in Reference Information Objects [RIOs functional unit];
- q) a facility for establishing a VT-association with the capability to switch between the modes of operation when the VTE is changed;
- r) display object update with ripple;
- s) the reporting of exception conditions by the VT-service-provider;
- t) the selective retention of VT-context between negotiation of successive VTEs.

### 6.3 VT Environment (VTE) and VTE-parameters

The transfer and manipulation of graphic data takes place within a VT-environment (VTE) defined by a logically consistent set of VTE-parameter values. Certain VTE-parameters are related in that a value for one VTE-parameter can constrain the existence of or permissible values for another VTE-parameter. These relationships are partly expressed by a directed graph for the VTE-parameters and partly by explicit definition.

One and only one full-VTE exists during data transfer. A full-VTE may be modified or replaced if negotiation facilities are available.

### 6.4 Virtual Terminal Environment Profiles

The Basic Class VT Service provides for the use of virtual terminal environment profiles (VTE-profiles) which are sets of VTE-parameters and VTE-parameter values for use in the negotiation of the VTE (see clause 11 and annex A).

### 6.5 Dialogue Control

The integrity of VT communication is maintained by Dialogue Control service facilities (by applying access rules, delivery control and delivery acknowledgement, see clauses 9 and 24), and service primitive sequencing rules which provide integrity by detecting and resolving collisions (see clause 27).

## 7 Communication facilities

### 7.1 Establishment facility

The Establishment facility provides a service that establishes a VT-association and an initial VTE for that VT-association when a VT-user first invokes the Basic Class VT Service.

### 7.2 Termination facility

The Termination facility provides services which enable a VT-user to terminate a VT-association either in an orderly and non-destructive manner or in an immediate and potentially destructive manner. It also provides a service which enables the VT service provider to notify the VT-users when a VT-association is terminated in a potentially destructive way.

### 7.3 Negotiation facility

The Negotiation facility provides services which enable peer VT-users to select, modify and replace the current-VTE.

An initial VTE is established during VT-association establishment based on the VTE-profile specified. If the VT-user does not specify a VTE-profile during VT-association establishment, a default VTE-profile is used to establish the initial VTE. This VTE may subsequently be modified or replaced depending on the type of negotiation facilities available.

The type of negotiation facility available to the VT-users is determined by the VT functional units selected during VT-association establishment. In addition to the VTE-profile selection facility available during VT-association establishment, there are two other types of negotiation, i.e., switch profile negotiation and multiple interaction negotiation.

### 7.4 Data Transfer facility

The Data Transfer facility provides a service which enables a VT-user to update the contents of display and/or control objects to which the VT-user is currently permitted update access.

### 7.5 Delivery Control facility

The Delivery Control facility provides services which enable a VT-user to control, synchronise and optionally request acknowledgement of, the release to the peer VT-user of updates entered previously using the Data Transfer facility. This includes the (negotiable) ability to "quarantine" (i.e., hold back) such updates from such release until the release is requested.

### 7.6 Dialogue Management facility

In S-mode, the Dialogue Management facility enables the VT-users to request or cede ownership of the WAVAR access-right.

In A-mode, the Dialogue Management facility is not available.

### 7.7 Interrupt facilities

The Interrupt facilities are available in both modes of operation but can only be used in the Data Handling phase. There is a destructive interrupt facility and a non-destructive interrupt facility.

The **destructive interrupt** facility allows a VT-user to interrupt a previously initiated sequence of updates to display and control objects, discard all updates currently being exchanged and resume exchanging updates after the VT-service-providers have resynchronized their activities.

The **non-destructive interrupt** facility allows VT-users to exchange priority information but without destroying non-priority information; it can be used as an "attention" signalling mechanism (via appropriately defined control objects, see clause 14).

### 7.8 Exception Reporting facility

The Exception Reporting facility provides services which allow the VT-service-provider to report abnormal conditions to the VT-users without causing termination of the VT-association.