
**Kitchen equipment — Safety requirements
and test methods for kitchen cabinets and
work tops**

*Mobilier de cuisine — Exigences de sécurité et méthodes d'essai pour
meubles de cuisine et plans de travail*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 15717:1998

<https://standards.iteh.ai/catalog/standards/sist/92317aa8-4e04-4a72-a292-79dc13a3989a/iso-15717-1998>



Contents	Page
1 Scope	1
2 Normative reference	1
3 Terms and definitions	1
4 General test conditions	2
5 Test apparatus	3
6 Safety requirements	3
7 Test parameters	5
8 Test procedures and requirements	6
9 Stability	12
10 Installation instructions	12
11 Test report	12
Annex A (informative) Apparatus for slam-open test for drawers	13
Annex B (normative) Safety requirements and test methods	15

ITeH STANDARD PREVIEW
(standards.iteh.ai)

ISO 15717:1998

<https://standards.iteh.ai/catalog/standards/sist/92317aa1-24e04-4a72-a292-79dc13a3989a/iso-15717-1998>

© ISO 1998

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet iso@iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

This International Standard ISO 15717 was prepared by Technical Committee ISO/TC 59, *Building construction*, Subcommittee SC 11, *Kitchen equipment*.

This International Standard is identical to European Standard EN 1153 with the exception of a few minor clarifying amendments.

Annex B forms a normative part of this International Standard. Annex A is for information only.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 15717:1998

<https://standards.iteh.ai/catalog/standards/sist/92317aa8-4e04-4a72-a292-79dc13a3989a/iso-15717-1998>

Kitchen equipment — Safety requirements and test methods for kitchen cabinets and work tops

1 Scope

This International Standard specifies safety requirements on the structure of built-in and free-standing kitchen units, work tops, and breakfast bars including those with glass in their construction.

This International Standard is applicable to units after installation. It is not applicable to catering equipment. However, safety depending on the structure of the building is not included; e.g. the strength of wall-hanging cabinets includes only the cabinet and its parts, the wall and the wall attachment are not included.

This International Standard specifies requirements to prevent serious injury through normal functional use, as well as misuse that might reasonably be expected to occur.

It should be understood that the tests do not ensure that structural failure will not eventually occur as a result of habitual misuse or after an excessively long period of service.

Assessment of ageing, degradation and the heating effect of appliances are not included, nor are the ergonomic aspects of safety and the resistance to fire.

2 Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the normative document indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 48, *Rubber, vulcanized or thermoplastic — Determination of hardness (hardness between 10 IRHD and 100 IRHD)*.

3 Terms and definitions

For the purposes of this International Standard, the following terms and definitions apply.

3.1

free-standing unit

unit not attached to the structure of the building

3.2 built-in unit

unit attached to the structure of the building, directly or via other units

3.3 wall-mounted unit

unit supported entirely by one or more walls of the building

3.4 top-mounted unit

unit supported by the ceiling

4 General test conditions

4.1 Preliminary preparation

Before any of the tests are commenced, the item shall have developed its full strength. At least 4 weeks under normal indoor conditions shall have elapsed between manufacturing (or assembly) and testing in the case of glued joints in timber and the like.

The furniture shall be tested as delivered. If of the self-assembly type, it shall be assembled in accordance with instructions supplied with the furniture. If the furniture can be assembled or combined in different ways, the most adverse combination shall be used for each test. The same is valid for units that can be combined with other units or components.

Units shall be attached at the fixing points specified by the manufacturer, using fixings which will not fail during the tests.

<https://standards.iteh.ai/catalog/standards/sist/92317aa8-4e04-4a72-a292-79dc13a3989a/iso-15717-1998>

Any assembly fittings shall be tightened before testing.

The tests refer to furniture parts with conventional function. A combination of tests may be necessary to cover the properties of multi-function components; e.g. a shelf that can be pulled out on runners shall be tested for the strength of the shelf supports and tested for the strength of the runners.

4.2 Test equipment

The forces in the static load tests shall be applied sufficiently slowly to ensure that dynamic loads are negligible.

Unless otherwise specified, the tests may be applied by any suitable device because results are not dependent upon the apparatus.

4.3 Tolerances

Unless otherwise stated, the following tolerances are applicable:

forces $\pm 5 \%$

velocities $\pm 5 \%$

masses $\pm 0,5 \%$

dimensions $\pm 1,0 \text{ mm}$

4.4 Sequence of testing

The tests shall be carried out in the sequence laid down in this International Standard.

All tests specified for a particular part and/or unit shall be carried out on the same sample.

5 Test apparatus

5.1 Floor surface, which is rigid, horizontal and flat.

5.2 Wall surface, which is rigid, vertical and flat.

5.3 Stops, to prevent the sample from sliding but not tilting.

These shall be not higher than 12 mm, except in cases where the design of the sample necessitates the use of higher stops in which case the lowest stops that will prevent the item from sliding shall be used.

5.4 Loading pad, comprising a rigid cylindrical object, 50 mm in diameter, having a flat face with 12 mm radius on the edge.

5.5 Apparatus for slam-open test for drawers

An example of a suitable apparatus as well as calibration instructions are shown in annex A.

5.6 Deadloads, comprising masses which do not reinforce the structure.

If bags with lead shot or the like are used, the bags shall be divided into small compartments to prevent the contents from moving during the test.

5.7 Glass marbles, between 10 mm and 15 mm in diameter.

These are required for the test described in 8.5 (slam-open test for drawers). They shall be in a flexible bag large enough to allow them to move during the test.

5.8 Impact plate, comprising a 1,7 kg steel plate of dimensions 200 mm × 109 mm × 10 mm, faced on one side with a 3 mm thick layer of rubber with a hardness of 85 IRHD in accordance with ISO 48.

5.9 Impact hammer, comprising a cylindrical object of mass of 6,5 kg, supported from a pivot by a steel tube of 38 mm in diameter and having a wall thickness of 2 mm.

The distance between the pivot and the centre of gravity of the striker shall be 1 m. The pendulum arm shall be pivoted by a low-friction bearing (see Figure 1).


5.10 Test hammer for fragmentation test, comprising a hammer with a head of mass 0,075 kg and a conical tungsten carbide tip with an angle of 60° (see Figure 2).

6 Safety requirements

6.1 Principles of safety requirements

The following safety requirements are based upon the knowledge that kitchen units or components are likely to cause serious injury only when they are heavy and fall through a significant distance.

Dimensions in millimetres

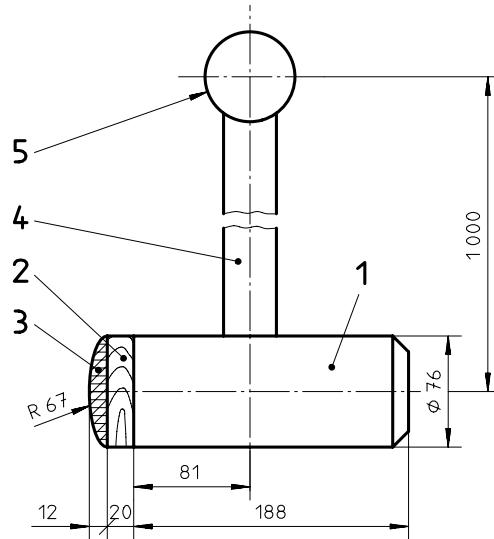

Key

- 1 Pendulum head, steel, of mass 6,4 kg
- 2 Hard wood
- 3 Rubber, 50 IRHD
- 4 Pendulum arm, length 950: high-tensile steel tube, \varnothing 38 mm \times 2 mm, mass 2 kg \pm 0,2 kg
- 5 Pivot

Mass of assembly (items 1, 2 and 3): 6,5 kg \pm 0,07 kg

ISO 15717:1998

<https://standards.iteh.ai/catalog/standards/sist/92317aa8-4e04-4a72-a292-79dc13a3989a/iso-15717-1998>

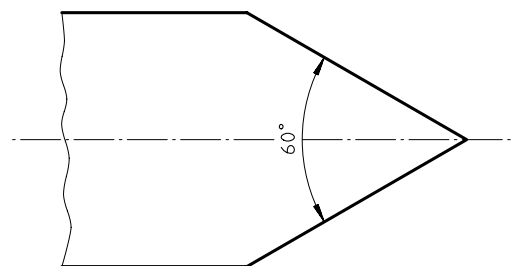


Figure 2 — Head of hammer for fragmentation test

As a consequence, the test methods specified are applicable to all units and components whose centre of gravity is at or above 900 mm from the floor and whose total mass (in accordance with 7.2) exceeds 10 kg. The test methods also apply to components whose centre of gravity is between 350 mm and 900 mm from the floor and whose total mass exceeds 35 kg (see annex B).

Any external vertical glass components $\geq 0,1 \text{ m}^2$ in area, any part of which is less than 900 mm above the floor, shall fulfil the requirements according to 8.9 or 8.10.

6.2 Constructional safety requirements

Components or parts of the kitchen units and worktops with which the user may come into contact during normal use shall have no burrs or sharp edges, nor shall there be open-ended tubes.

All movable parts accessible during normal use shall have safety distances in any position during movement of $\leq 8 \text{ mm}$ or $\geq 25 \text{ mm}$. This applies to any two elements moving relative to each other, with the exception of doors (including hinges), flaps (including hinges) and extension elements (including runners), but including handles.

In order to avoid pinching points for feet, the safety distance shall be $\geq 100 \text{ mm}$.

All roll-front doors which slide vertically shall not move by themselves from any position higher than 50 mm, measured from the closed position, if this can cause any injury.

Units intended for storage of hazardous items or substances shall, when locked, not be capable of being opened by a force of $\leq 200 \text{ N}$ applied directly to the handle.

All drawers whose total mass (in accordance with 7.2) exceeds 10 kg but where safety tests are not carried out (see clause 7) should have effective open stops; i.e. they shall resist being pulled out of the carcass once by a force of 200 N applied to the handle of the loaded drawer or they shall be supplied with product information to the effect that drawers can easily be pulled out.

Additional requirements are specified for the strength of work tops and the stability of free-standing units (see 8.7 and clause 9).

7 Test parameters

7.1 Determination of centre of gravity

The centre of gravity of a component or unit shall be taken as the geometric centre of the usable volume of drawers and cupboards and as the geometric centre of doors, flaps and shelves.

The height of the centre of gravity above the floor shall be measured for floor units or their components when installed in accordance with the manufacturer's instructions. Adjustable feet shall be set at their middle position.

Height-adjustable components of floor units shall be placed in their highest position.

All work tops and wall-mounted or top-mounted units, or components thereof, are considered to have their centre of gravity more than 900 mm above the floor, unless restrictions are stated by the manufacturer.

7.2 Determination of total mass

The total mass shall be the mass of the component or unit plus the mass which is supported by it.

Unless conspicuously and durably marked by the manufacturer stating a maximum allowable load, the mass supported shall be determined according to Table 1, which specifies the load per unit area for shelves, flaps and bottoms, and the load per unit volume for drawers and baskets.

The volume of baskets shall be taken as the volume contained below the top edge.

The volume of drawers shall be taken as the area of the drawer bottom multiplied by the clear height.

NOTE The clear height is the maximum clear distance over the drawer bottom. This is often the distance from the top of the drawer bottom to the lower edge of the drawer front of the drawer above, or the structure of the unit.

Table 1 — Required loads

Elements	Required loads kg/dm ²
Shelves/flaps/bottoms	0,65
Baskets with internal height ≤ 100 mm All other baskets	0,65 0,20
Drawers with ≤ 110 mm clear height All other drawers	0,35 0,20

iTeh STANDARD PREVIEW

8 Test procedures and requirements (standards.iteh.ai)

8.1 Shelves

ISO 15717:1998

Shelves more than 900 mm above the floor shall be secured against their falling out.

If the shelf is not restrained by a physical stop, this requirement is fulfilled when the horizontal force applied to the middle of the front edge required to initiate movement of the unloaded shelf is more than 50 % of the weight of the unloaded shelf.

Any unloaded shelf shall not tip when a downward vertical force of 100 N is applied at any point 25 mm in from the front edge.

8.2 Shelf supports

All supports of the tested shelf shall be tested.

For units with an indeterminate number of shelves, unless otherwise specified, divide the internal height of the unit in millimetres by 300 and take the nearer integer. This number minus 1 shall then be the number of shelves to be fitted.

Load all components intended for storage purposes uniformly in accordance with Table 1.

For the shelf being tested, distribute the load uniformly, except at approximately 220 mm from one support, where the impact plate (5.8) shall be tipped over 10 times at a point as close to the support as possible (see Figure 3). The striking surface shall be that faced with rubber.

After the test shelf supports and/or the shelf/carcass shall show no fracture or other damage that could affect the safety.

Dimensions in millimetres

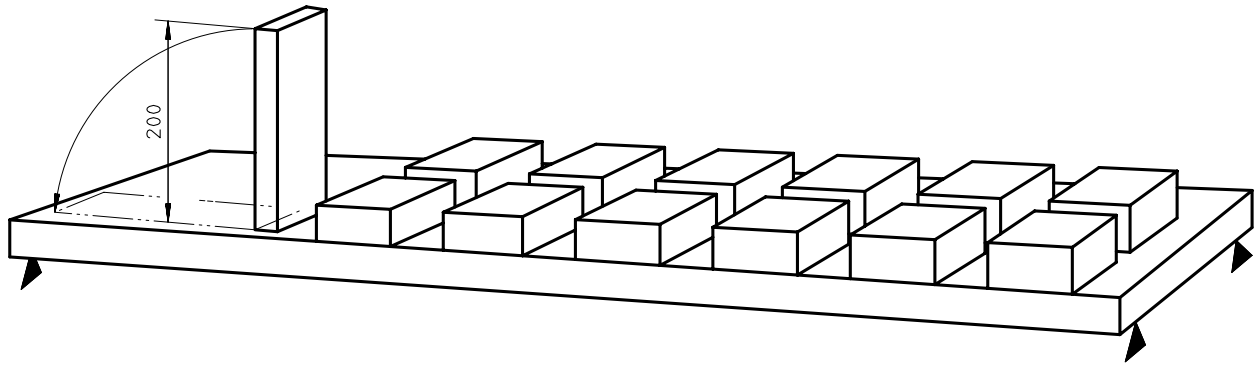


Figure 3 — Strength test for shelf supports

8.3 Pivoted doors

This test applies to all doors hinged to the carcass on one vertical side (including folding doors).

Load all components intended for storage purposes uniformly in accordance with Table 1.

Load the door as shown in Figure 4 with a load of 30 kg, acting vertically 100 mm in from the edge of the door.

Swing the door 10 full cycles (back and forth) from a position $45^\circ \pm 2^\circ$ from fully closed to a position $10^\circ \pm 2^\circ$ from fully opened, but to a maximum of 135° .

Opening and closing can be done by hand using 3 s to 5 s for opening and 3 s to 5 s for closing.

After the test the door shall remain attached to the cabinet.

ISO 15717:1998
<https://standards.iteh.ai/catalog/standards/sist/92317aa8-4e04-4a72-a292-79dc13a3989a/iso-15717-1998>

Dimensions in millimetres

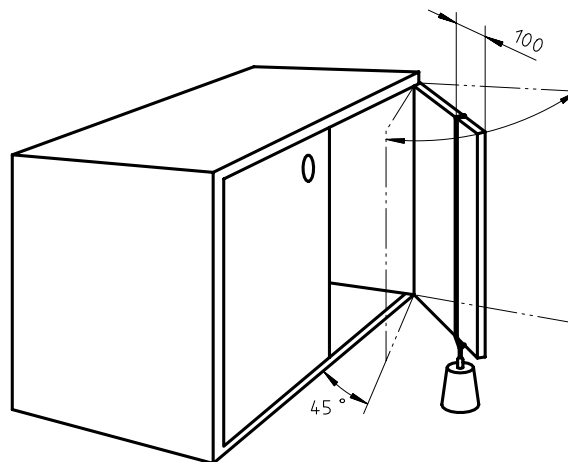


Figure 4 — Load test for pivoted doors

8.4 Sliding doors and horizontal roll-fronts (slam shut and open)

This test applies to all doors sliding horizontally, including those constructed from hinged elements.

Load all components intended for storage purposes uniformly in accordance with Table 1.