

**Telecommunications and Internet converged Services and
Protocols for Advanced Networking (TISPAN);
Network Integration Testing between
SIP and ISDN/PSTN network signalling protocols;
Part 2: Abstract Test Suite (ATS) and partial Protocol
Implementation eXtra Information for Testing (PIXIT)
proforma specification**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Full standard:
<https://standards.iteh.ai/catalog/standards/sist/4318f5c1-10e1-4335-8610-5c050d90134/etsi-ts-186-001-2-v1.2.1-2009-09>



Reference

RTS/TISPAN-06052-2-NGN-R1

KeywordsATS, interoperability, ISDN, PIXIT, PSTN, SIP,
testing, TTCN**ETSI**650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2009.
All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTETM is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM[®] and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	4
Foreword.....	4
1 Scope	5
2 References	5
2.1 Normative references	6
2.2 Informative references.....	6
3 Definitions and abbreviations.....	7
3.1 Definitions.....	7
3.2 Abbreviations	7
4 Abstract Test Method (ATM).....	8
4.1 Network architecture	8
4.2 Protocol architecture.....	8
4.3 Test architecture	9
4.3.1 Interconnection of TS and SUT	9
4.3.2 Test System architecture	9
5 The ATS development process.....	10
5.1 Requirements and Test Purposes.....	10
5.2 ATS structure	11
5.2.1 Test case grouping	11
5.2.2 Test case identifiers	12
5.3 ATS specification framework.....	12
5.3.1 ATS Library.....	12
5.3.2 Use of TTCN-3	13
5.3.2.1 General	13
5.3.2.2 TTCN-3 naming conventions.....	14
5.4 ATS archive.....	15
Annex A (normative): Partial PIXIT proforma	16
A.1 Introduction	16
A.2 PIXIT items	16
A.2.1 SIP-related PIXIT.....	16
A.2.2 ISDN-related PIXIT	21
A.2.3 General PIXIT	24
Annex B (informative): TTCN-3 library modules.....	25
B.1 Electronic annex, zip file with TTCN-3 code	25
Annex A (informative): Change history	26
History	27

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN).

The present document is part 2 of a multi-part deliverable covering the Network Integration Testing between SIP and ISDN/PSTN network signalling protocols, as identified below:

- Part 1: "Test Suite Structure and Test Purposes (TSS&TP) for SIP-ISDN".
- Part 2: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification";**
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) for SIP-SIP".
- Part 4: "Abstract Tests Suite (ATS) SIP-SIP".

1 Scope

The present document specifies the Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma based on the Test Suite Structure and Test Purposes defined in [1].

The TSS&TP have been developed Network Integration Testing between SIP and ISDN/PSTN network signalling protocols. The ATS is sometimes referred to in the present document as "SIP-ISDN-Interworking ATS".

The test notation used in the ATS is TTCN-3 ([3]).

The following test specification- and design considerations can be found in the body of the present document:

- the overall test suite structure;
- the testing architecture;
- the test methods and port definitions;
- the test configurations;
- the design principles, assumptions, and used interfaces to the TTCN3 tester (System Simulator);
- TTCN styles and conventions;
- the partial PIXIT proforma;
- the modules containing the TTCN-3 ATS.

Annex A provides the Partial Implementation Extra Information for Testing (IXIT) Proforma of the ATS.

Annex B provides the Testing and Test Control Notation (TTCN-3) part of the ATS.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

- [1] ETSI TS 186 001 (Parts 1 and 3): "Telecommunications and Internet Converged Services and Protocols for Advanced Networking (TISPAN); Network Integration Testing between SIP and ISDN/PSTN network signalling protocols".
- [2] ETSI TS 102 351 (V2.1.1): "Methods for Testing and Specification (MTS); Internet Protocol Testing (IPT); IPv6 Testing: Methodology and Framework".
- [3] ETSI ES 201 873-1 (V3.1.1): "Methods for Testing and Specification (MTS); The Testing and Test Control Notation version 3; Part 1: TTCN-3 Core Language".
- [4] ETSI ES 201 873-5 (V3.1.1): "Methods for Testing and Specification (MTS); The Testing and Test Control Notation version 3; Part 5: TTCN-3 Runtime Interface (TRI)".
- [5] ETSI ES 201 873-6 (V3.1.1): "Methods for Testing and Specification (MTS); The Testing and Test Control Notation version 3; Part 6: TTCN-3 Control Interface (TCI)".
- [6] ISO/IEC 9646-1 (1994): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts".
- [7] ISO/IEC 9646-7 (1995): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 7: Implementation Conformance Statements".
- [8] ITU-T Recommendation Q.931 (1998): "ISDN user-network interface layer 3 specification for basic call control".
- [9] ETSI TS 102 027-3 (V3.1.1): "Methods for Testing and Specification (MTS); Conformance Test Specification for SIP (IETF RFC 3261); Part 3: Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma".
- [10] IETF RFC 3261 (2002): "SIP; Session Initiation Protocol".
- [11] ETSI EN 383 001: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); Interworking between Session Initiation Protocol (SIP) and Bearer Independent Call Control (BICC) Protocol or ISDN User Part (ISUP) [ITU-T Recommendation Q.1912.5, modified]".
- [12] ITU-T Recommendations Q.761 to Q.764 (1999): "Signalling System No.7 - ISDN User Part (ISUP)".
- [13] ITU-T Recommendation E.164 (2005): "The international public telecommunication numbering plan".
- [14] IETF RFC 4575: "A Session Initiation Protocol (SIP) Event Package for Conference State".

2.2 Informative references

The following referenced documents are not essential to the use of the present document but they assist the user with regard to a particular subject area. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Not applicable.

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in SIP/ISUP interworking reference specification [11], ISDN layer 3 reference specification [8], ISDN User Part (ISUP) reference specification [12], [6], [7], [3] (TTCN-3) and the following apply:

Abstract Test Case (ATC): complete and independent specification of the actions required to achieve a specific test purpose, defined at the level of abstraction of a particular Abstract Test Method, starting in a stable testing state and ending in a stable testing state

Abstract Test Method (ATM): description of how an IUT is to be tested, given at an appropriate level of abstraction to make the description independent of any particular realization of a Means of Testing, but with enough detail to enable abstract test cases to be specified for this method

Abstract Test Suite (ATS): test suite composed of abstract test cases

Implementation Under Test (IUT): implementation of one or more OSI protocols in an adjacent user/provider relationship, being part of a real open system which is to be studied by testing

Means of Testing (MOT): combination of equipment and procedures that can perform the derivation, selection, parameterization and execution of test cases, in conformance with a reference standardized ATS, and can produce a conformance log

PICS proforma: document, in the form of a questionnaire, which when completed for an implementation or system becomes the PICS

PIXIT proforma: document, in the form of a questionnaire, which when completed for the IUT becomes the PIXIT

Point of Control and Observation (PCO): point within a testing environment where the occurrence of test events is to be controlled and observed, as defined in an Abstract Test Method

pre-test condition: setting or state in the IUT which cannot be achieved by providing stimulus from the test environment

Protocol Implementation Conformance Statement (PICS): statement made by the supplier of a protocol claimed to conform to a given specification, stating which capabilities have been implemented

Protocol Implementation eXtra Information for Testing (PIXIT): statement made by a supplier or implementor of an IUT (protocol) which contains or references all of the information related to the IUT and its testing environment, which will enable the test laboratory to run an appropriate test suite against the IUT

SIP number: number conforming to the numbering and structure specified in ITU-T Recommendation E.164 [13]

System Under Test (SUT): real open system in which the IUT resides

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASP Abstract Service Primitive

NOTE: Exchanged between entities inside the TS or between the user of the ATS (operator) and the TS.

ATC	Abstract Test Case
ATM	Abstract Test Method
ATS	Abstract Test Suite
DSS1	Digital Subscriber System No. 1
ETS	Executable Test Suite
IETF	Internet Engineering Task Force
ISDN	Integrated Services Digital Network

IUT	Implementation Under Test
IWU	InterWorking Unit
LAN	Local Area Network
MOT	Means Of Testing
MTC	Main Test Component
NGN	Next Generation Network
PA	Platform Adapter
PA	Platform Adapter
PCO	Point of Control and Observation

PDU Protocol Data Unit

NOTE: Message exchanged between TS and SUT at a signalling interface.

PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
PTC	Parallel Test Component
SA	SUT Adapter
SDP	Session Description Protocol
SIP	Session Initiation Protocol
SUT	System Under Test
TC	Test Case
TCI	TTCN-3 Control Interface
TCP	Test Coordination Procedures
TD	Test Description
TE	Test Equipment
TL	Test Logging
TP	Test Purpose
TS	Test System
TSS	Test Suite Structure
TSS&TP	Test Suite Structure and Test Purposes
TTCN	Tree and Tabular Combined Notation
TTCN-3	Testing and Test Control Notation edition 3
UDP	Unreliable Datagram Protocol

4 Abstract Test Method (ATM)

4.1 Network architecture

Figures 1 and 2 show the network architecture for SIP-ISDN InterWorking Units (IWU).

Figure 1 shows the network architecture for SIP-ISDN Interworking.




Figure 1: Interworking between SIP and ISDN

4.2 Protocol architecture

Figure 1 shows that there are 2 interfaces of the IWU (representing the SUT in the testing environment described in the present document): a SIP interface and an ISDN interface.

Figure 2 shows the protocol architecture:

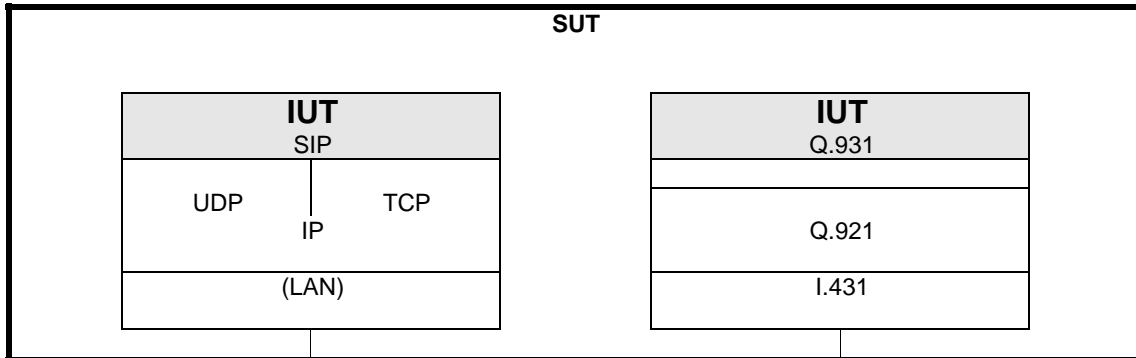


Figure 2: Protocol architecture of the SIP-ISDN-Interworking ATS

4.3 Test architecture

4.3.1 Interconnection of TS and SUT

Figure 3 shows the interconnection of TS and SUT in terms of signalling message flows.

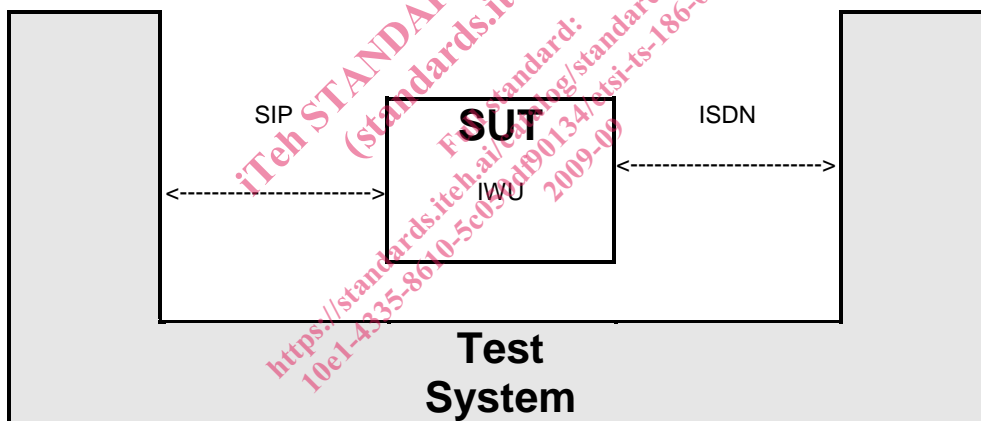


Figure 3: Interconnection of TS and SUT

4.3.2 Test System architecture

An abstract architecture for a Test System (TS) implementing a TTCN-3 ATS is displayed in figure 4 and also stated in [4].

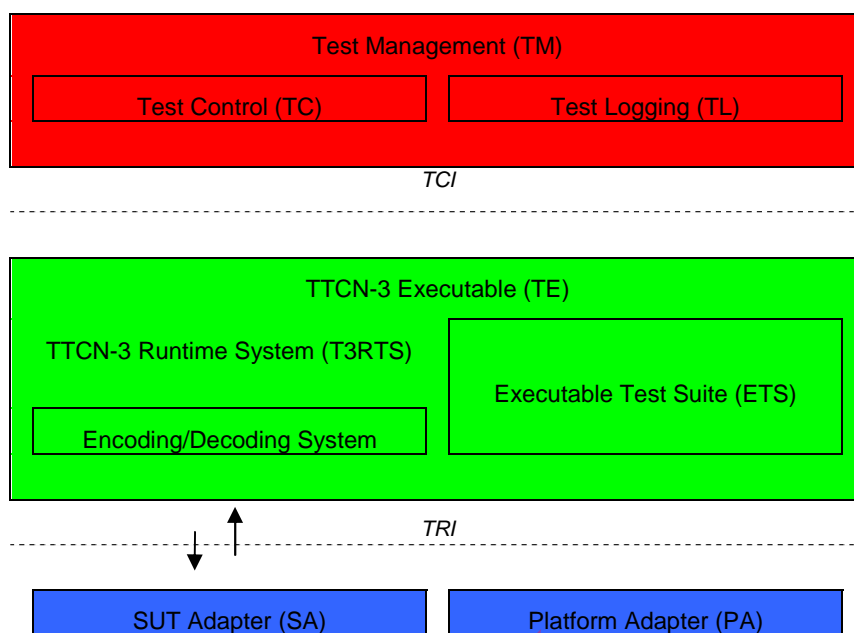


Figure 4: Abstract Test System Architecture

A TS has two interfaces, the TTCN-3 Control Interface (TCI) and the TTCN-3 Runtime Interface (TRI), which specify the interface between Test Management (TM) and TTCN-3 Executable (TE) entities, and TE, SUT Adapter (SA) and Platform Adapter (PA) entities, respectively. Out of these two interfaces the TRI has been standardized in [4], whereas the specification and implementation of the TCI is in [5].

The part of TS that deals with interpretation and execution of TTCN-3 modules, i.e. the Executable Test Suite (ETS), is shown as part of the TTCN-3 Executable (TE). This ETS corresponds either to the executable code produced by a TTCN-3 compiler or a TTCN-3 interpreter from the TTCN-3 ATS in a TS implementation. The remaining part of the TS, which deals with any aspects that cannot be concluded from information being present in the TTCN-3 ATS alone, can be decomposed into Test Management (TM), SUT Adapter (SA), and Platform Adapter (PA) entities. In general, these entities cover a TS user interface, test execution control, test event logging, communication of test data with the SUT, and timer implementation.

The part of SA used for SIP message transfer shall implement the TRI adaptation as well as the SIP transport protocol architecture described in clause 4.2.

The Encoding/Decoding System (EDS) entity, as far as applied to SIP messages, with the TE and Test Logging (TL) entity within the TM shall comply with the conventions defined in clause 4.3.2 of [9].

The part of SA used for ISDN message transfer shall implement the TRI adaptation as well as the ISDN transport protocol architecture described in clause 4.2.

The Encoding/Decoding System (EDS) entity, as far as applied to ISDN messages, shall comply with the conventions and requirements defined in the following clauses.

5 The ATS development process

5.1 Requirements and Test Purposes

For each test purpose there is a table defined in clause 6 of [1]. The requirements applicable to this TP are given by a reference to the relevant base specification. There are no explicit formulations of requirements.