

---

---

**Ships and marine technology —  
Drainage systems on ships and  
marine structures —**

Part 3:

**Sanitary drainage, drain piping for  
vacuum systems**

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

*Navires et technologie maritime — Installations de drainage sur navires  
et structures maritimes —*

*Partie 3: Drainage sanitaire, conduits de décharge au système de vide*

<https://standards.iteh.ai/catalog/standards/sist/346218ac-253b-405b-a3ad-bb40d652f860/iso-15749-3-2004>



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 15749-3:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/346218ae-233b-405b-a3ad-bb40d652f860/iso-15749-3-2004>

© ISO 2004

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Contents

Page

Foreword.....	iv
1 Scope.....	1
2 Normative references .....	1
3 Terms and definitions.....	2
4 Vacuum system.....	2
5 Pipes.....	3
6 Fittings .....	4
7 Laying of drain lines .....	5
8 Capacity of drain lines.....	7
9 Collector tank and sewage treatment plant.....	7
10 Determination of air capacity.....	8
11 Testing and operation of pipelines .....	9
12 Disposal .....	9
13 System example .....	9
Annex A (informative) Example of a cleaning direction within an operating instruction for the cleaning of a pipe system by pickling.....	11
Annex B (normative) Test methods.....	17
Bibliography .....	20

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 15749-3 was prepared by Technical Committee ISO/TC 8, *Ships and marine technology*, Subcommittee SC 3, *Piping and machinery*.

ISO 15749 consists of the following parts, under the general title *Ships and marine technology — Drainage systems on ships and marine structures*: **(standards.iteh.ai)**

- *Part 1: Sanitary drainage-system design* [ISO 15749-3:2004](https://standards.iteh.ai/catalog/standards/sist/346218ae-233b-405b-a3ad-bb40d652f860/iso-15749-3-2004)
- *Part 2: Sanitary drainage, drain piping for gravity systems* <https://standards.iteh.ai/catalog/standards/sist/346218ae-233b-405b-a3ad-bb40d652f860/iso-15749-3-2004>
- *Part 3: Sanitary drainage, drain piping for vacuum systems*
- *Part 4: Sanitary drainage, sewage disposal pipes*
- *Part 5: Drainage of decks, cargo spaces and swimming pools*

# Ships and marine technology — Drainage systems on ships and marine structures —

## Part 3: Sanitary drainage, drain piping for vacuum systems

### 1 Scope

This part of ISO 15749 applies to the design of sanitary drain lines in vacuum systems on ships and marine structures.

For planning and basic requirements, see ISO 15749-1.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IMO Resolution A.753 (18), *Guidelines for the application of plastic pipes on ships*<sup>1)</sup>

ISO 65, *Carbon steel tubes suitable for screwing in accordance with ISO 7-1*

ISO 264, *Unplasticized polyvinyl chloride (PVC) fittings with plain sockets for pipes under pressure — Laying lengths — Metric series*

ISO 4200, *Plain end steel tubes, welded and seamless — General tables of dimensions and masses per unit length*

ISO 9329-1, *Seamless steel tubes for pressure purposes — Technical delivery conditions — Part 1: Unalloyed steels with specified room temperature properties*

ISO 9330-1, *Welded steel tubes for pressure purposes — Technical delivery conditions — Part 1: Unalloyed steel tubes with specified room temperature properties.*

ISO 15749-1, *Ships and marine technology — Drainage systems on ships and marine structures — Part 1: Sanitary drainage-system design*

ISO 15749-4, *Ships and marine technology — Drainage systems on ships and marine structures — Part 4: Sanitary drainage, sewage disposal pipes*

1) Published by International Maritime Organization, London.  
Available from IMO Secretariat, Publications Section, 101-104 Piccadilly, London W1V, United Kingdom.

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 15749-1 apply.

## 4 Vacuum system

### 4.1 Functional description

The vacuum drainage system operates as follows:

- wastewater is collected from water closets, urinals, and bidets or from other drainage items in branch lines or manifolds;
- the wastewater is carried by means of the vacuum to a wastewater collector tank or a sewage treatment plant.

The wastewater is evacuated in the form of a “plug” (sewage plug) owing to a pressure difference in the pipes before and behind the plug.

### 4.2 Description

4.2.1 Drain lines in the vacuum system commence at the drain of a drainage item.

Vacuum-operated water closets have an integrated vacuum mechanism, other drainage items are connected to a separate vacuum valve via a short non-vacuum line.

Drain lines in the vacuum system terminate at a vacuum-generating unit.

4.2.2 The wastewater is conveyed through pressure pipes from the vacuum-generating unit to a collector tank or sewage treatment plant.

NOTE The vacuum-generating unit may also be integrated into the collector tank or sewage treatment plant.

4.2.3 The sewage disposal pipes downstream of the collector tank or sewage treatment plant are not part of the vacuum system.

For the design of these and other pressure pipes, ISO 15749-4 is applicable.

Figure 2 of this standard shows an example of a vacuum-operated drainage system with drain lines.

4.2.4 Depending on the ship type, its architecture, arrangement of ship's rooms and number of persons, one, two or more vacuum sewage systems, which serve separate sections of a ship, can be provided.

### 4.3 Operating pressure

The operating pressure is between 0,4 bar and 0,7 bar absolute pressure (corresponding to a permissible negative pressure of between – 0,3 bar and – 0,6 bar).

### 4.4 Drainage items

#### 4.4.1 Vacuum-operated water closet

A water closet fitted with a mechanism for drain and flush valve control shall be provided.

The water volume for one flushing operation is approximately 1,2 litres.

#### 4.4.2 Urinals and bidets

These sanitary drainage items do not have built-in vacuum mechanisms and shall therefore be connected to a separate vacuum mechanism (vacuum valve) via connecting lines.

#### 4.4.3 Washbasins and other drainage items

These sanitary drainage items do not have built-in vacuum mechanisms and shall therefore be connected to a separate vacuum mechanism (vacuum valve) via connecting lines.

### 5 Pipes

Depending on the location, the following pipes shall be used for vacuum drain lines and vent lines:

- steel pipes in accordance with 5.1;
- steel pipes and CuNiFe pipes with spigot and socket joints, hereinafter referred to as spigot and socket pipes;
- CuNiFe pipes in accordance with 5.3;
- PVC-U pipes in accordance with 5.4; plastic pipes shall be approved in accordance with IMO-Resolution A.753 (18);
- pipes with low flame spread and smoke emission properties are at the discretion of the classification society.

For nominal bores see Table 1.

ISO 15749-3:2004  
<https://standards.iteh.ai/catalog/standards/sist/346218ae-233b-405b-a3ad-bb40d652f860/iso-15749-3-2004>

**Table 1 — Nominal bores for drain lines**

Type of pipe	Steel and CuNiFe pipes	PVC-U and spigot and socket pipes
Nominal bore, NB	40	40
	50	50
	100	—

#### 5.1 Steel pipes

The following types of pipes are applicable:

- seamless steel pipes in accordance with ISO 4200 and ISO 9329-1, of S 235 JR;
- welded steel pipes in accordance with ISO 4200 and ISO 9330-1, of S 235 JR;
- threaded pipes in accordance with ISO 65, of S 185.

For outside diameter and wall thickness see Table 2.

Table 2 — Dimensions of steel pipes

Nominal bore, NB	Outside diameter, $d$ mm	Wall thickness, $s_{\min}$ mm
40	48,3	2,3
50	60,3	2,3
100	114,3	3,2

## 5.2 Spigot and socket pipes

Spigot and socket pipes with dimensions in accordance with Table 3 are applicable. Also, CuNi10Fe1,6Mn pipes with these dimensions are applicable.

Table 3 — Dimensions of spigot and socket pipes

Nominal bore, NB	Outside diameter, $d$ mm	Wall thickness, $s_{\min}$ mm
40	42	1,4
50	53	1,4

## 5.3 CuNiFe pipes

CuNi10Fe1,6Mn pipes with dimensions in accordance with Table 4 are applicable.

ISO 15749-3:2004  
 Table 4 — Dimensions of CuNiFe pipes

Nominal bore, NB	Outside diameter, $d$ mm	Wall thickness, $s_{\min}$ mm
40	44,5	2
50	57	

## 5.4 PVC-U pipes

Pipes with dimensions in accordance with Table 5 are applicable.

Table 5 — Dimensions of PVC-U pipes

Nominal bore, NB	Outside diameter, $d$ mm	Wall thickness, $s_{\min}$ mm
40	50	3,7
50	63	4,7

## 6 Fittings

### 6.1 Requirements

Fittings shall be suitable for vacuum use in accordance with 4.3. Shut-off valves shall provide smooth passage.



## 6.2 Testing

Testing for tightness is specified in B.2.

## 7 Laying of drain lines

### 7.1 Line routing

In accordance with ISO 15749-1, vacuum drain lines may run in any direction. However, changes in direction at short intervals should be avoided.

### 7.2 Horizontal laying

#### 7.2.1 Gradient

Horizontally laid piping should have a slight gradient (approximately 2:1 000) towards the point of suction.

#### 7.2.2 Water traps

Water traps shall be integrated into horizontally installed pipes at distances of not more than 40 m, immediately before riser branches.

### 7.3 Connecting lines

Non-vacuum lines connecting drainage units to vacuum valves shall have an adequate gradient of not less than 2:1 000. Unimpeded supply with venting of the line, if required, shall be ensured.

### 7.4 Riser branches

**7.4.1** Not more than three vacuum toilets or vacuum valves may be connected to one riser branch, all of which shall be located on the same deck. The length of the riser branch shall not exceed one deck height (max. 3 m). Longer branches should be subject to the manufacturer's consent.

**NOTE** It is assumed that the max. three items will not be operated simultaneously.

**7.4.2** If only one vacuum toilet or vacuum valve is connected, the riser branches may pass through more than one deck, provided a horizontal conduit with a safety device against back flow is installed on each deck. See Figure 2.

**7.4.3** Immediately before the riser branch feeds into the horizontal manifold, a vacuum no-return fitting should be installed above the manifold, unless there is an elevation of the line of  $3 \times d$  at the inlet.

**7.4.4** If a collecting pipeline feeds into the horizontal manifold from above, a device preventing back flow should be installed just before the connection of a riser branch to the manifold.

### 7.5 Feeding pipes

The angle at which pipes feed into manifolds in the direction of flow shall not exceed 45°. Tees and 90° elbows may not be used. Connections from below, or located opposite to each other, are not permitted (see examples in Figure 1). The internal surface at the connections shall be smooth.

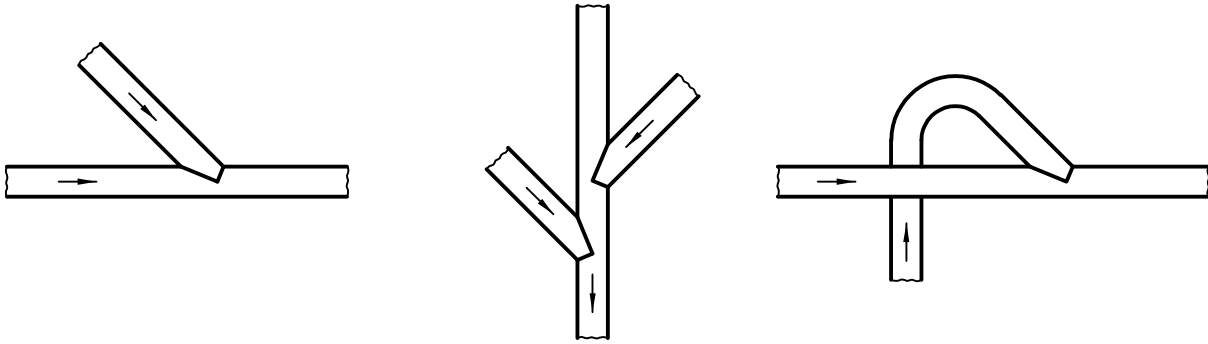


Figure 1 — Feeding pipes

## 7.6 Pipe elbows

The radius of bends in pipes shall not be less than three times the outer pipe diameter.

## 7.7 Cleaning openings

Cleaning openings shall be provided in pipe sections of drain lines which cannot be cleaned otherwise.

### 7.7.1 Cleaning openings in steel pipes

The following shall be provided:

- branch pipes with hex-head screw plugs; or
- blank flanges; or
- ball valves (arranged where frequent cleaning can be expected).

**STANDARD PREVIEW**  
(standards.iteh.ai)  
ISO 15749-3:2004  
<https://standards.iteh.ai/catalog/standards/sist/346218ae-233b-405b-a3ad-2004>

### 7.7.2 Cleaning openings in spigot and socket pipes

Suitable cleaning openings for vacuum pipes shall be provided.

### 7.7.3 Cleaning openings in PVC-U pipes

The following PVC-U moulded fittings for bonding shall be used:

- union-type adapter nipples in accordance with ISO 264;
- adapter bushings and threaded caps as closing devices.

### 7.7.4 Cleaning openings in CuNiFe pipes

The following shall be provided:

- branch pipes made of CuNiFe; or
- blank flanges; or
- ball valves.

## 8 Capacity of drain lines

### 8.1 Connections

For nominal bores of pipes and the number of vacuum mechanisms in drain lines, see Table 6.

**Table 6 — Dimensions of piping**

Pipes	Nominal bore, NB	Number of vacuum mechanisms <sup>a</sup>
Single branches	40	2
Collecting branches	50	2 to 32
Riser branches	40	1 to 3
Manifolds	50	32 max.
<sup>a</sup> Vacuum-operated water closets (with integrated mechanisms) and vacuum valves.		

One vacuum valve shall not serve more than two drainage items without vacuum mechanisms.

### 8.2 Manifolds

Systems with several vacuum mechanisms should be separated into at least two manifolds to save the function in case of blockage in one line.

In-line water closet systems installed in one room should be connected to two separate manifolds.

### 8.3 Main sewers

[ISO 15749-3:2004](https://standards.iteh.ai/catalog/standards/sist/346218ae-233b-405b-a3ad-1b40d652810/iso-15749-3-2004)

[https://standards.iteh.ai/catalog/standards/sist/346218ae-233b-405b-a3ad-](https://standards.iteh.ai/catalog/standards/sist/346218ae-233b-405b-a3ad-1b40d652810/iso-15749-3-2004)

Manifolds which cannot be connected separately to a vacuum-generating unit shall be routed to a main sewer (or valve manifold).

Main sewers shall be designed so that they are as short as possible with a gradient towards the vacuum-generating unit.

If a main sewer is to serve more than six manifolds, it shall have a nominal bore of NB 100.

## 9 Collector tank and sewage treatment plant

Concerning details for the design of tanks and sewage treatment plants, the following shall be taken into account:

- the minimum volume of wastewater in accordance with to ISO 15749-1:2004, Table 2;
- if necessary, the volume differing from the minimum volume of wastewater;
- necessary or agreed, holding time of wastewater in tanks or sewage treatment plants depending on the ship's trading area;
- general requirements in accordance with ISO 15749-1.