
**Road vehicles — Pedestrian protection —
Targets for the assessment of the
biofidelity of pedestrian-leg test devices**

*Véhicules routiers — Protection des piétons — Objectifs pour évaluer la
biofidélité des dispositifs d'essai de la jambe du piéton*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/TR 15766:2000](https://standards.iteh.ai/catalog/standards/sist/93137b4c-6a84-40e7-ba95-cd7afe0f3d/iso-tr-15766-2000)

[https://standards.iteh.ai/catalog/standards/sist/93137b4c-6a84-40e7-ba95-
cd7afe0f3d/iso-tr-15766-2000](https://standards.iteh.ai/catalog/standards/sist/93137b4c-6a84-40e7-ba95-cd7afe0f3d/iso-tr-15766-2000)



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/TR 15766:2000](https://standards.iteh.ai/catalog/standards/sist/93137b4c-6a84-40e7-ba95-cd7afe0f3d/iso-tr-15766-2000)

<https://standards.iteh.ai/catalog/standards/sist/93137b4c-6a84-40e7-ba95-cd7afe0f3d/iso-tr-15766-2000>

© ISO 2000

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 734 10 79
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

In exceptional circumstances, when a technical committee has collected data of a different kind from that which is normally published as an International Standard ("state of the art", for example), it may decide by a simple majority vote of its participating members to publish a Technical Report. A Technical Report is entirely informative in nature and does not have to be reviewed until the data it provides are considered to be no longer valid or useful.

Attention is drawn to the possibility that some of the elements of this Technical Report may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO/TR 15766 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 12, *Restraint systems*.

[ISO/TR 15766:2000](https://standards.iteh.ai/catalog/standards/sist/93137b4c-6a84-40e7-ba95-cd7afe0f3d/iso-tr-15766-2000)

<https://standards.iteh.ai/catalog/standards/sist/93137b4c-6a84-40e7-ba95-cd7afe0f3d/iso-tr-15766-2000>

Introduction

The impact-response targets presented in this Technical Report are the result of a critical evaluation of data selected from experiments agreed to by experts as being the best and most up-to-date information available.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/TR 15766:2000](https://standards.iteh.ai/catalog/standards/sist/93137b4c-6a84-40e7-ba95-cd7afe0f3d/iso-tr-15766-2000)

<https://standards.iteh.ai/catalog/standards/sist/93137b4c-6a84-40e7-ba95-cd7afe0f3d/iso-tr-15766-2000>

Road vehicles — Pedestrian protection — Targets for the assessment of the biofidelity of pedestrian-leg test devices

1 Scope

This Technical Report describes laboratory-test procedures and impact-response targets for the assessment of the impact biofidelity of thigh, knee and leg test devices and mathematical models used in pedestrian-protection studies.

The targets apply to impacts to either the inside (medial) or outside (lateral) surfaces of the leg.

2 Biomechanical studies

Four types of tests are specified for assessing the biofidelity of pedestrian leg-test devices: two lateral knee-bending tests conducted at 15 km/h and 20 km/h (see clause 3), a lateral knee-shear test conducted at 15 km/h (clause 4), a lateral knee-impact test conducted at 2,6 m/s (clause 5), and a static lateral knee-stiffness test (clause 6). The targets for the lateral knee-bending and -shear tests are based on cadaver tests conducted at INRETS in Marseilles, in cooperation with Chalmers University of Technology, Sweden. Six legs were used to define the 15 km/h knee-bending guideline, eight for the 20 km/h knee-bending guideline, and five for the 15 km/h knee-shear guideline. The cadaver test results are reported in two IRCOBI papers by Kajzer *et al.* [1], [2]¹⁾. The target for the lateral knee-impact test is based on the results of tests on 12 cadaver legs reported by Levine *et al.* [3]. The lateral knee-stiffness target is based on static-load-versus-deflection tests using 13 legs reported by Van Hoeck [4].


The following word of caution should be kept in mind when assessing the biofidelity of a test device based on the lateral knee-bending, -shear and -stiffness guidelines. In order for the biofidelity descriptions to be complete in respect of lateral knee-bending and -shear, data is required for the change in angle between the longitudinal axes of tibia and femur known as the valgus angle (see Figure 6), as well as for tibia-to-femur displacement. In addition, it should be noted that the lateral knee-stiffness guideline is based on static-load-versus-deflection data, and that dynamic-stiffness data are needed to complete it.

3 Lateral knee-bending tests

3.1 Test setup

The lateral-knee-bending test setup is shown in Figure 1.

1) The numbers between square brackets refer to the bibliography.

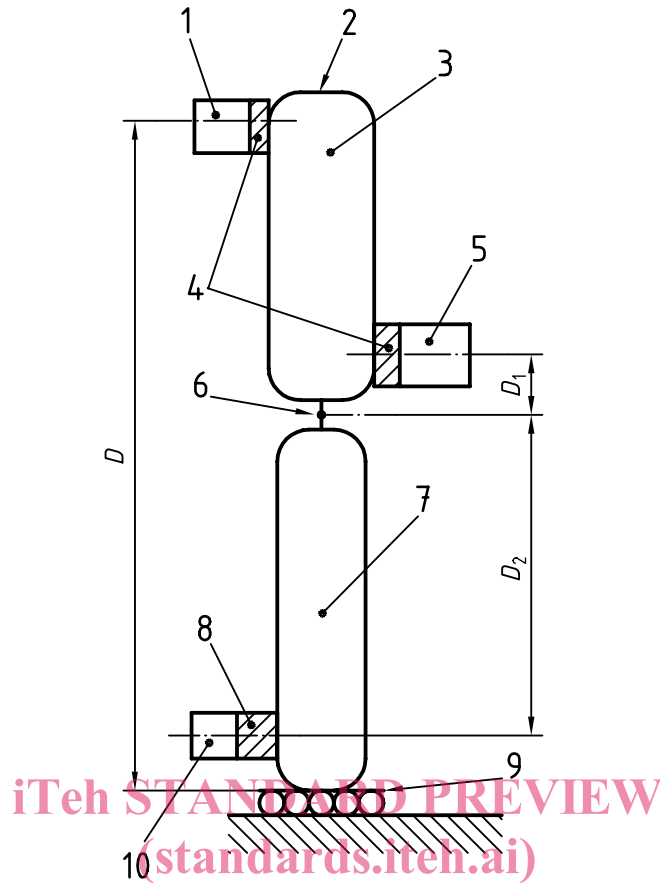

Key

- | | | | |
|---|---|----|---|
| 1 | Lateral support | 6 | Knee joint |
| 2 | 40 kg preload | 7 | Leg |
| 3 | Thigh | 8 | Impactor block of 50 mm-thick, rigid polystyrene foam |
| 4 | Support blocks of 25 mm-thick, rigid polystyrene foam | 9 | Low-friction mobile plate |
| 5 | Medial support | 10 | Impactor |

ISO/TR 15766:2000
<https://standards.iteh.ai/catalog/standards/sist/c-6a84-40e7-ba95-cd7afe0f3d/iso-tr-15766-2000>

Figure 1 — Lateral-knee-bending test setup

3.2 Impactor characteristics

The impactor characteristics of the lateral-knee-bending test setup are:

- 40 kg mass
- rectilinear-motion constraint
- impactor face measuring 50 mm × 150 mm
- block of rigid polystyrene foam²⁾ measuring 50 mm × 50 mm × 150 mm (see element 8 in Figure 1).

2) Styrodur is an example of a suitable product available commercially. This information is given for the convenience of users of this Technical Report and does not constitute an endorsement by ISO of this product.

3.3 Support blocks

The full dimensions of the rigid polystyrene foam support blocks (see element 4 in Figure 1) used in this test setup:

25 mm × 50 mm × 150 mm.

3.4 Test apparatus dimensions

The dimensions of the lateral-knee-bending test apparatus (Figure 1) are:

$D = 904$ mm, $D_1 = 74$ mm, $D_2 = 400$ mm

3.5 Measurements

The following measurements are made in this test:

- impactor acceleration, a_y (CFC 180); calculate impactor force, $F_y = a_y \times 40$ kg;
- impactor velocity at time of impact;
- medial support load $F_{\text{knee}, y}$ (CFC 180).

NOTE CFC: chemical frequency class, as defined in ISO 6487 [5].

3.6 Biofidelity targets

3.6.1 Impact at 15 km/h

For a lateral knee-bending test with an impact of 15 km/h, the impactor force should be within the corridor shown in Figure 2.

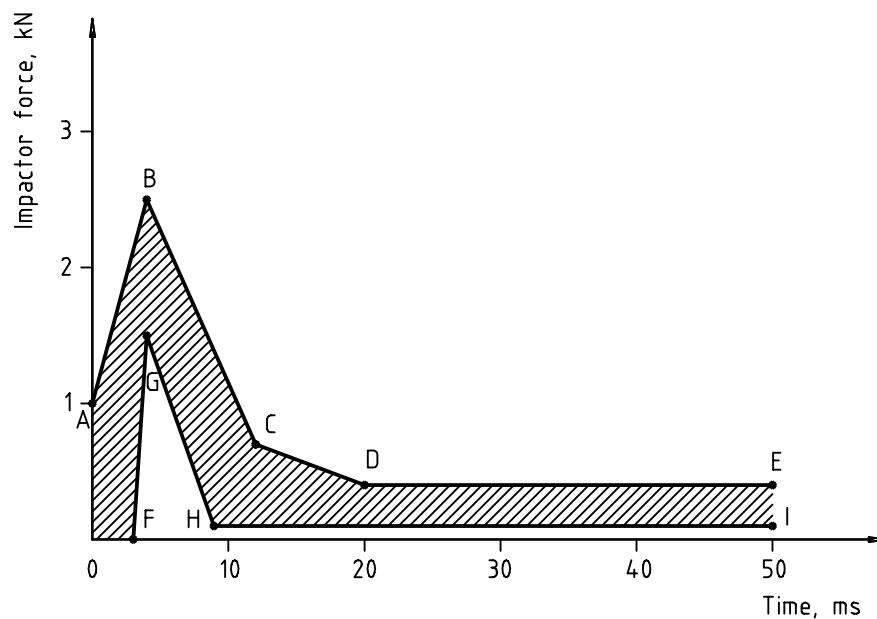


Figure 2 — Lateral knee-bending test: 15 km/h corridor

The coordinates for this corridor are presented in Table 1.

Table 1 — Lateral knee-bending test: 15 km/h corridor

Coordinates (ms; kN)			
A	(0; 1,0)	F	(3; 0,0)
B	(4; 2,5)	G	(4; 1,5)
C	(12; 0,7)	H	(9; 0,1)
D	(20; 0,4)	I	(50; 0,1)
E	(50; 0,4)		

3.6.2 Impact at 20 km/h

For a lateral knee-bending test with a 20 km/h impact, the impactor force should be within the corridor shown in Figure 3.

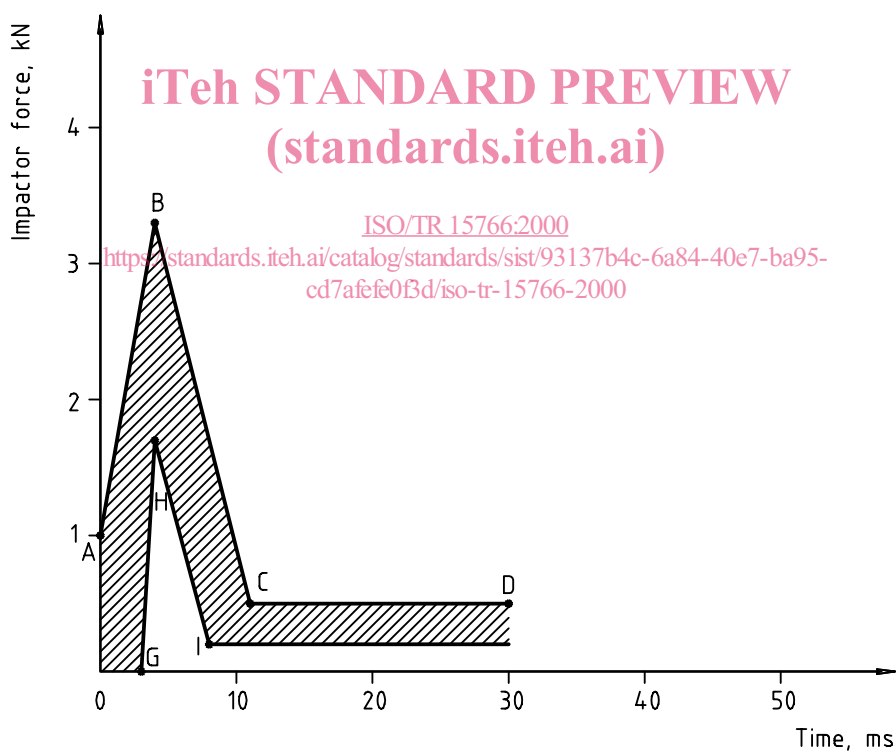


Figure 3 — Lateral knee-bending test: 20 km/h corridor

The coordinates for this corridor are presented in Table 2.

Table 2 — Lateral knee-bending test: 20 km/h corridor

Coordinates (ms; kN)			
A	(0; 1,0)	G	(3; 0,0)
B	(4; 3,3)	H	(4; 1,7)
C	(11; 0,5)	I	(8; 0,2)
D	(30; 0,5)		

3.7 Comments concerning lateral knee-bending test

The characteristics of the polystyrene-foam blocks used in the test are presented in annex A.

Use new blocks for each test.

4 Lateral knee-shear test

4.1 Test setup

The lateral-knee-shear test setup is shown in Figure 4.

4.2 Impactor characteristics

The impactor characteristics for the lateral knee-shear test are:

- 40 kg mass
- rectilinear-motion constraint
- impactor face measuring 50 mm × 150 mm
- Rigid, polystyrene-foam block measuring 50 mm × 50 mm × 150 mm.

4.3 Support blocks

The full dimensions of the polystyrene-foam support blocks (see element 4 in Figure 4) used in this test setup:

25 mm × 50 mm × 150 mm

4.4 Dimensions of the test-setup apparatus

The dimensions of the lateral-knee-shear test apparatus (Figure 4) are:

$D = 874$ mm, $D_1 = D_2 = 45$ mm, $D_3 = 400$ mm